

- 2 ~ 24 circuits available
- Material: UL 94V-2 nylon 66
- 600V volts rating (R.M.S.)
- Current rating up to 9 amperes per circuit
- Positive housing locks
- Tin or select Gold

### Specifications:

- Voltage rating: 600V AC, DC (R.M.S.)
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C  
(Including temperature range)



### Dimensional Information ( mm )

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		5.4	14	25.2	30.6
4	4.2	9.6	16	29.4	34.8
6	8.4	13.8	18	33.6	39.0
8	12.6	18.0	20	37.8	43.2
10	16.8	22.2	22	42.0	47.4
12	21.0	26.4	24	46.2	51.6

### Current rating & wire size:

Wire Size AWG	Rated Voltage	Circuits			
		2	4 ~ 6	8 ~ 10	12 ~ 24
#18	250V	9A	8A	7A	6A
#20		7A	6A	5A	5A
#22		5A	4A	4A	4A
#24		4A	3A	3A	3A

Without Pegs		Material
With drain holes	Without drain holes	
W4505-XXPDSBTWR	W4505-XXPDSBT2R	UL 94V-2
W4505-XXPDSBTIR	W4505-XXPDSBT3R	UL 94V-0

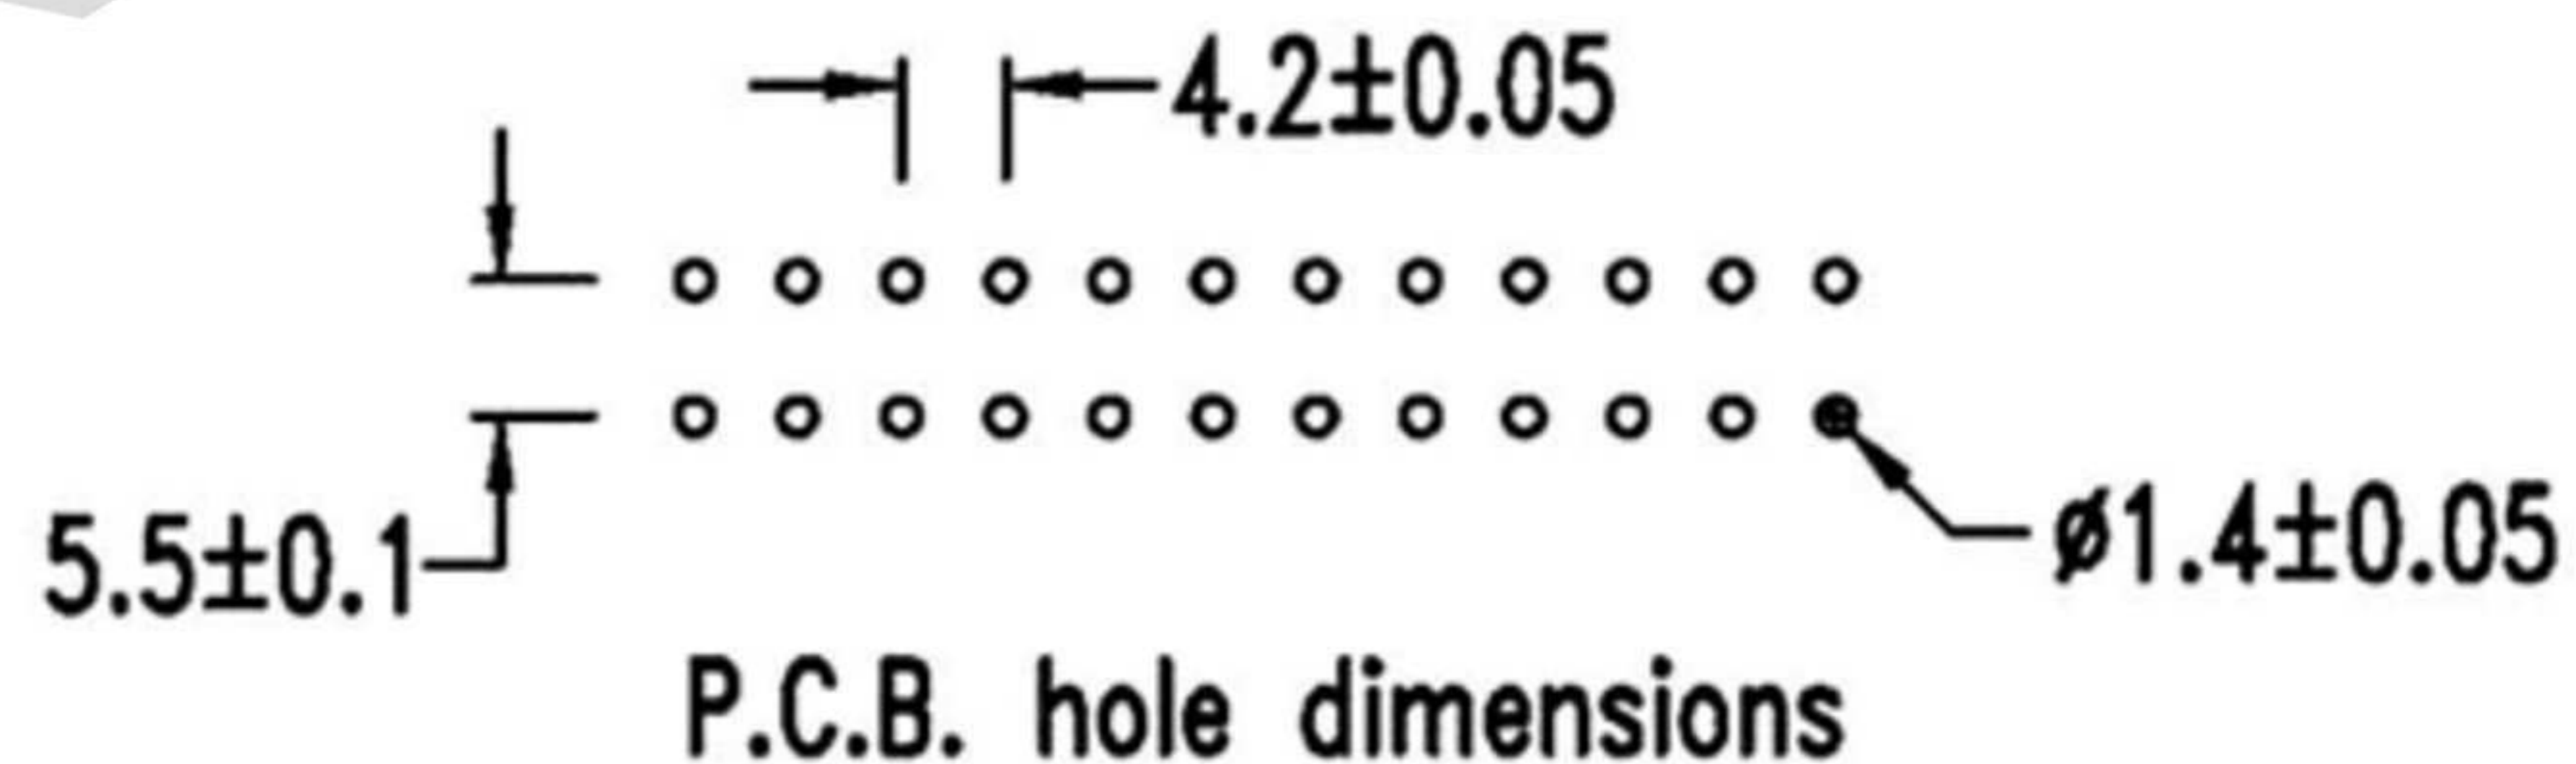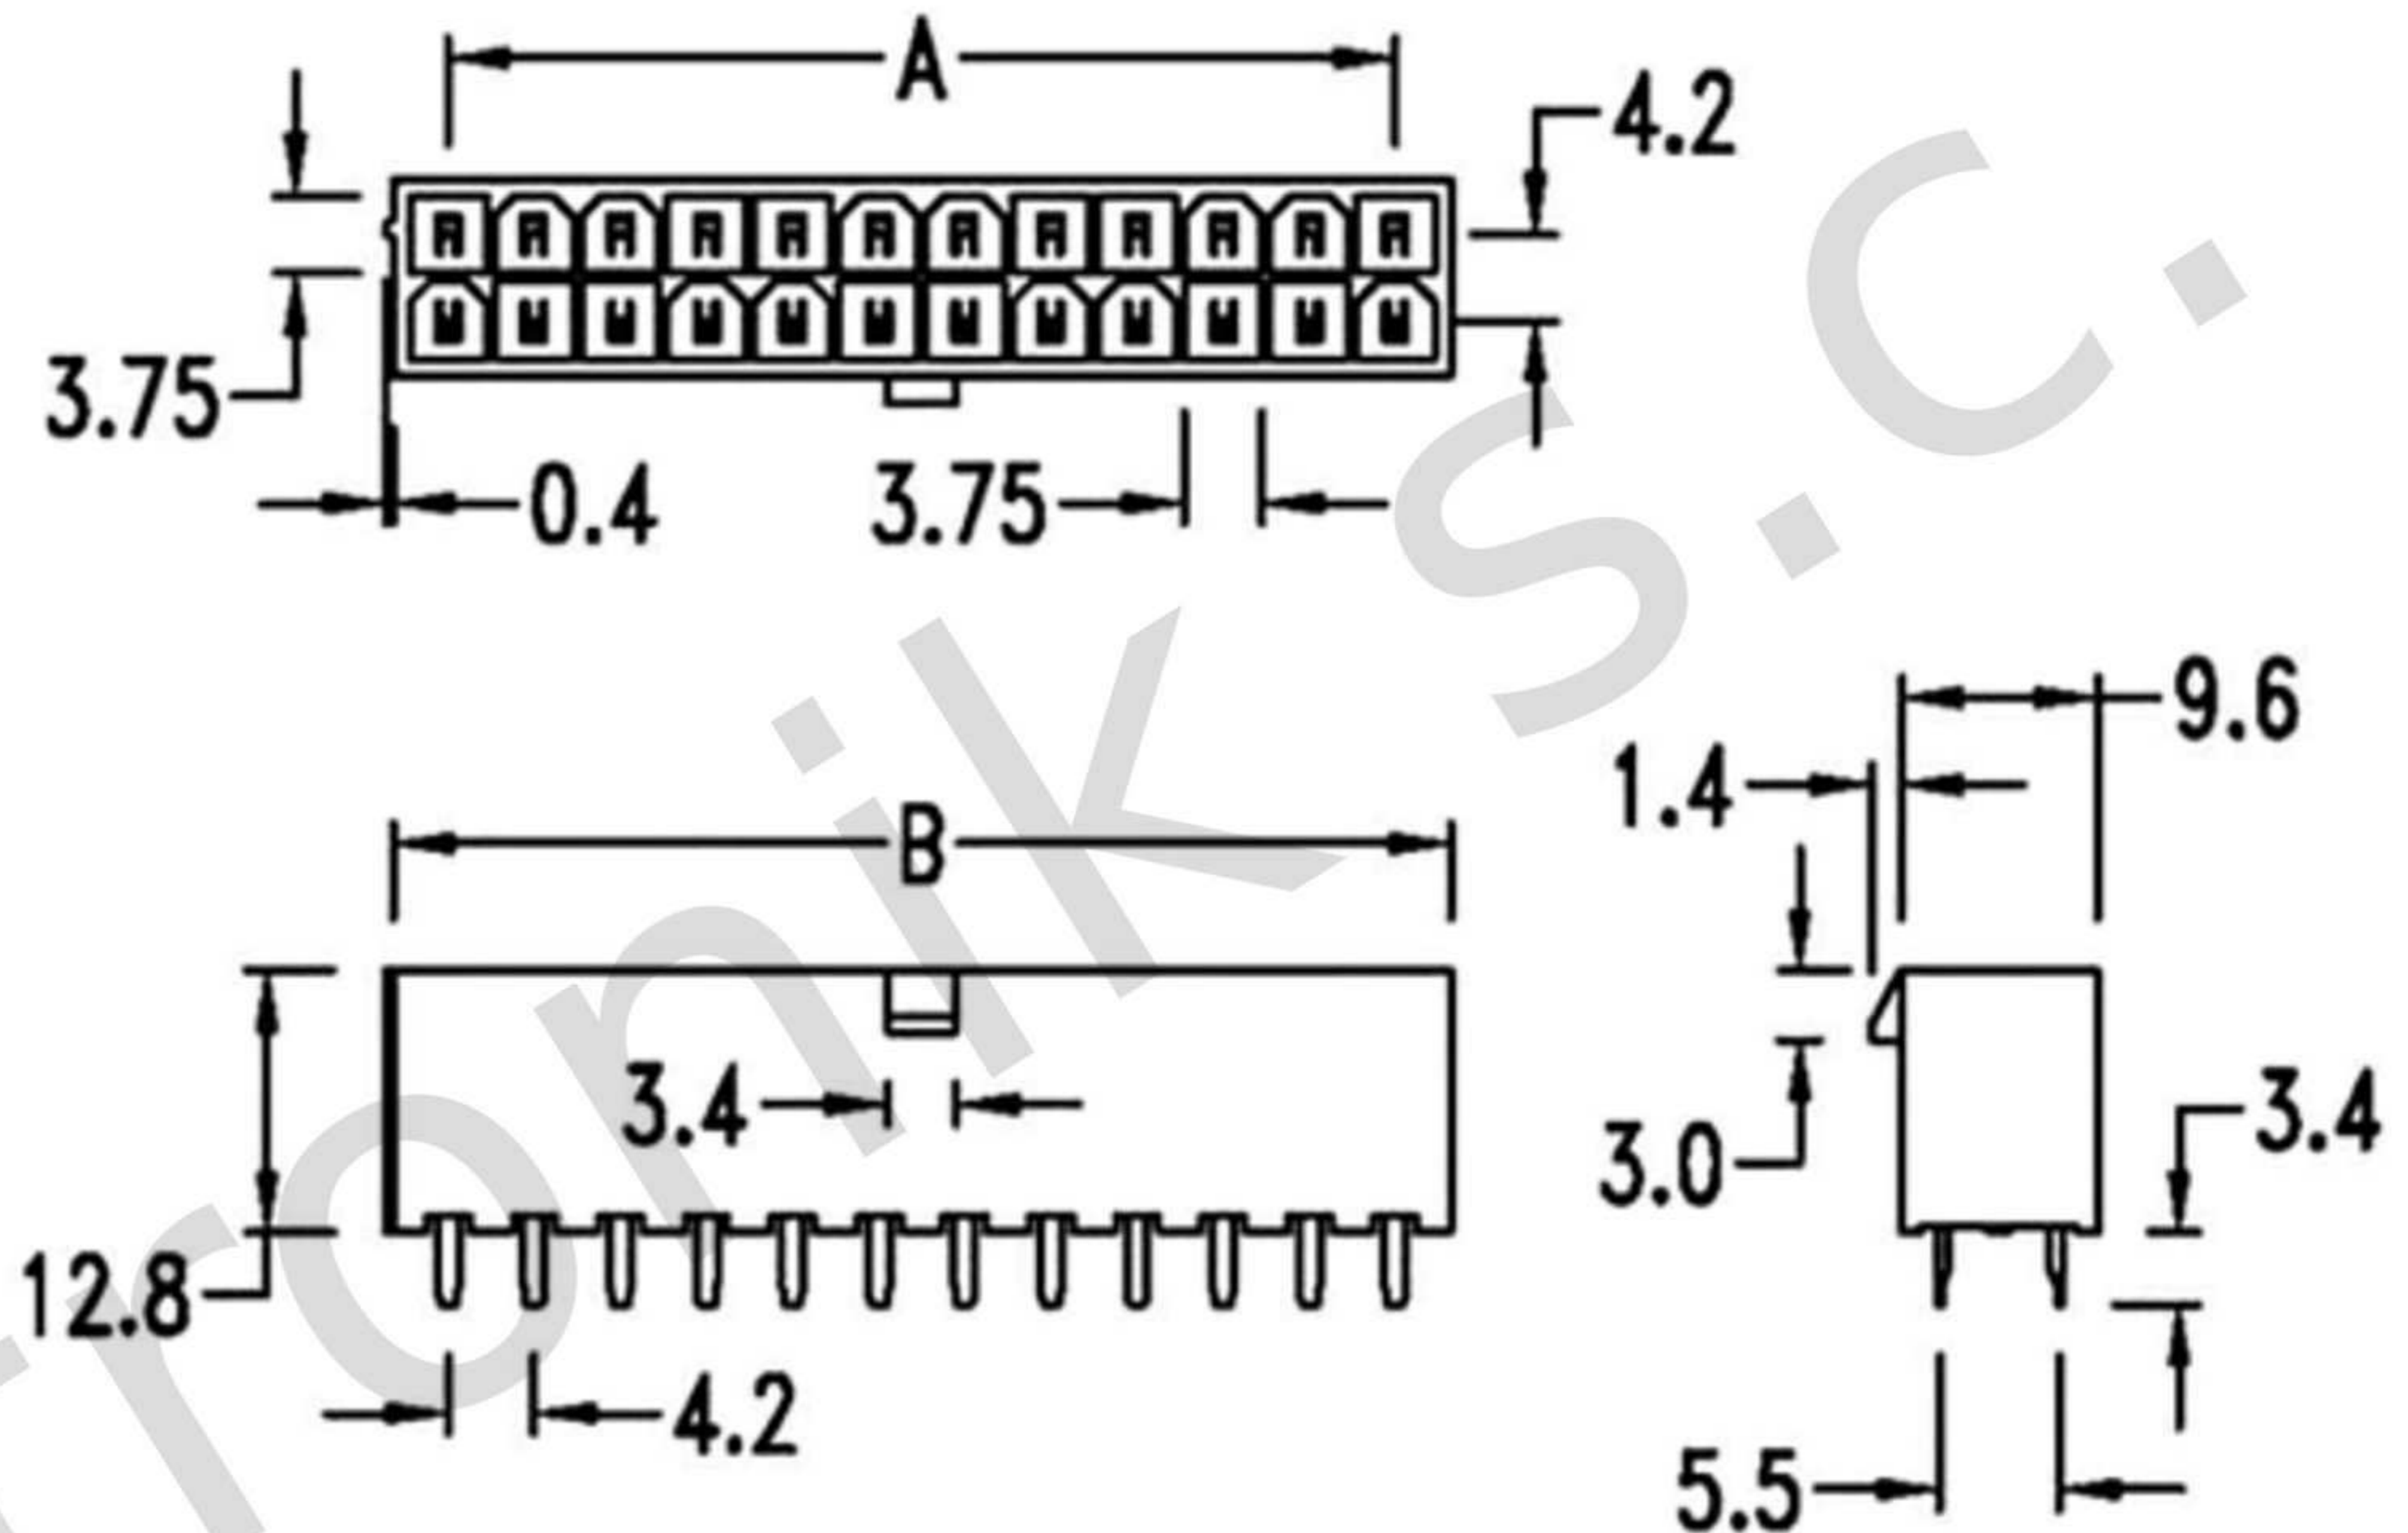

Oznaczenie	JS-1151	
Opis	Mini-Fit dual row male 4,20mm	
	<b>WW elektronik s.c.</b> ul. Kraszewskiego 26 81-815 Sopot	Tel. 058 551-11-15 fax. 058 550-45-17 e-mail: <a href="mailto:info@wwelektronik.com.pl">info@wwelektronik.com.pl</a>
	<a href="http://www.wwelektronik.com.pl">www.wwelektronik.com.pl</a>	