


Dimension:

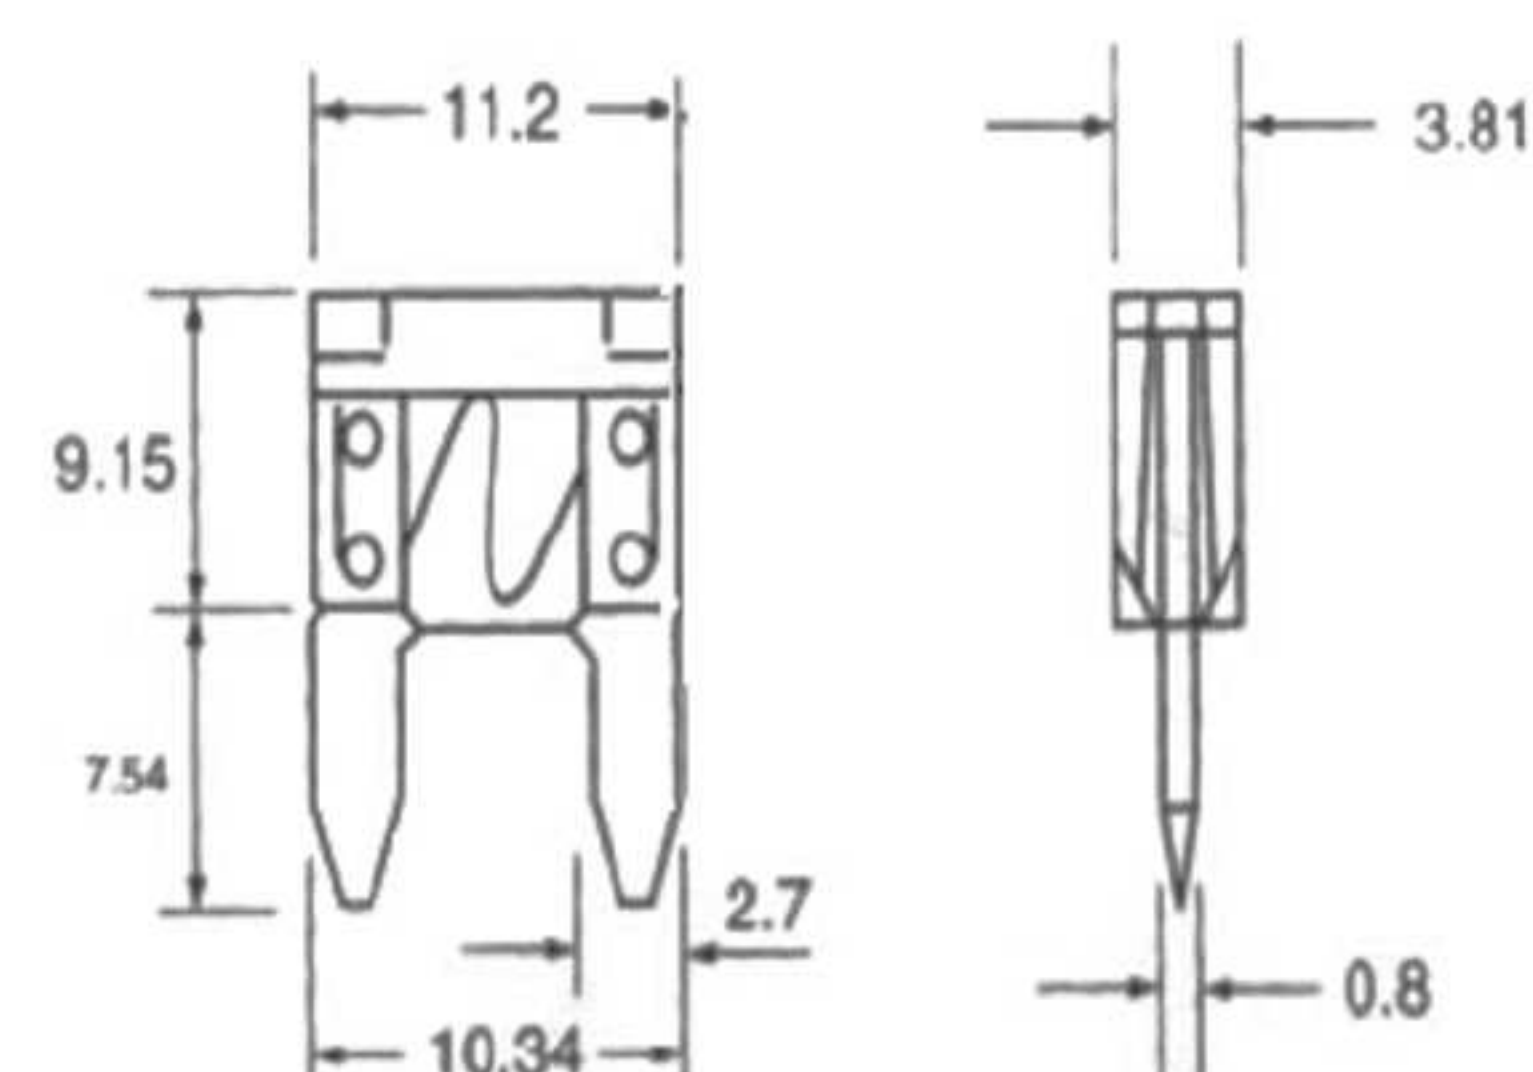

Load	Opening time
110%	4hours minimum
135%	0.75sec-1800sec
200%	0.15sec-5sec
350%	80m sec

Avilable:

1A (Lt.GREY) 2A (GREY) 3A (VIOLET)
 4A (PINR) 5A (TAN) 7.5A (BROWN) 10A (RED)
 15A (BLUE) 20A (YELLOW) 25A (NATURAL)
 30A (GREEN) 35A (PURPLE) 40A (ORANGE)

Oznaczenie	BMI-XX	
Opis	MINIVAL FUSES	
	WW elektronik s.c. ul. Kraszewskiego 26 81-815 Sopot	Tel. 058 551-11-15 fax. 058 550-45-17 e-mail: info@wwelektronik.com.pl
	www.wwelektronik.com.pl	