



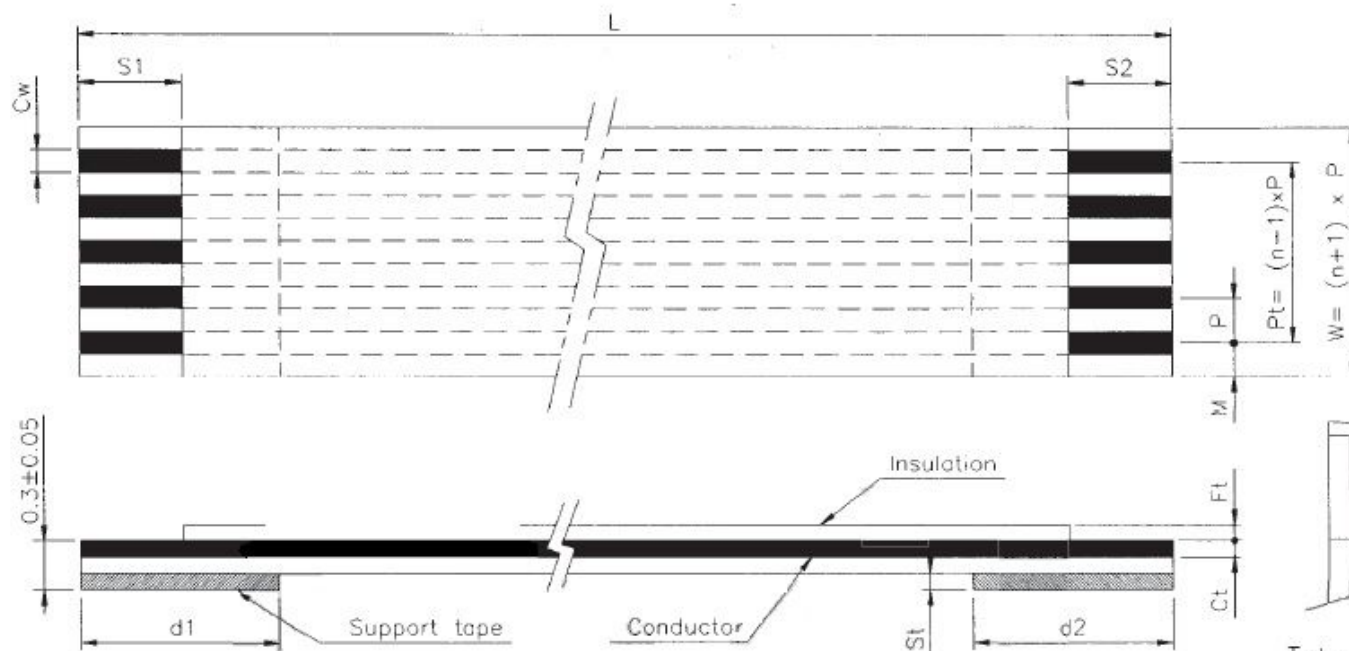

TOLERANCE:

Abbr.	TOLERANCE				
	P=0.5	P=0.8	P=1.0	P=1.25	P=2.54
P	±0.05	±0.08	±0.08	±0.10	±0.20
Pt	±0.08	±0.10	±0.10	±0.15	+0.2 -0.4
W	±0.08	±0.10	±0.10	±0.20	+0.2 -0.4
M	±0.08	±0.15	±0.15	±0.20	±0.30
Cw	±0.02	±0.03	±0.03	±0.03	±0.04
L	(30~100)±3, (101~300)±5, (301~600)±10, (Length more than 601mm)±15mm				

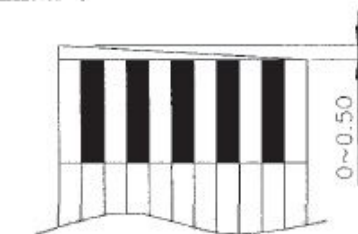

Tolerance of Cutting Tilt

	Dimension
Ft±0.01	0.043
St±0.01	0.225

UL Style : 20706

Customer P/N		No. of Conductor	Dimension											Support Tape Color
			P	Pt	L	W	M	CW	Ct±0.01	S1±1.0	S2±1.0	d1±2.0	d2±2.0	
	FFCE4008T112000-300	40	0.5	19.5	120	20.5	0.5	0.3	0.05	4	4	8	8	BLUE

RoHS Compliant



DRAWN BY: Charge
ENGINEER: Charge
CHECKED BY: Sun
APPROVED BY: Zisley

DATE: 12/29
12/29
12/29-03
12/30/03

UNIT: mm
TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ±
XX ±
XXX ±
X' ± Z'
X' ±
XX' ±

TITLE:
FLAT FLEXIBLE CABLE
(TERMINAL TYPE : T1)
MATERIAL: SEE PRODUCT SPECIFICATION
CUST. CODE: 美齊

DRAWING NO. FFC001SD
FILE NO. T103351-1A
SCALE 1 / 1
SHEET 1 OF 1