
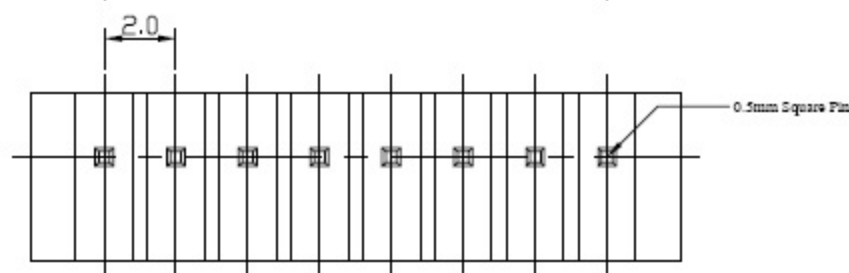
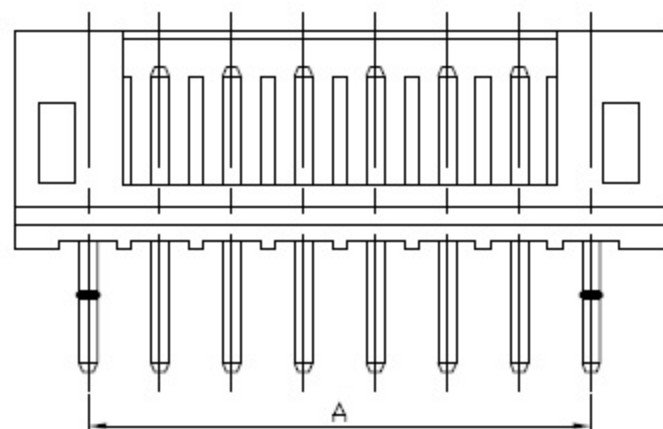


RECOMMENDED P.C. BOARD HOLE DIM.

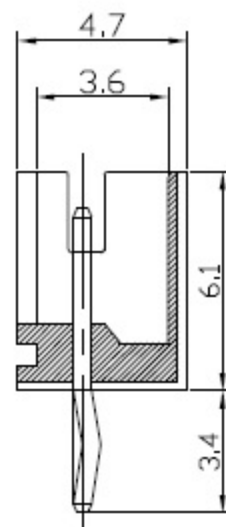

Specifications

Electrical

Voltage Rating: 100V(AC)

Current Rating: 2A

Contact Resistance: 20m Ω max.

Dielectric Withstanding Voltage: 800V AC/1min.

Insulation Resistance: 1000M Ω min.

Material

Circuits: 2~20

Insulator: Nylon 66 UL 94V-0

Color: White or Natural

Contact: Brass 0.50mm(0.020") Square Wire Pins

Plating: Tin or Gold Plated

Temperature Range: -25°C~+85°C

Applicable PC Board Thickness: 0.8 to 1.6mm

Poles	Dimension mm (inch.)	
	A	B
2	2.0(0.079)	6.1(0.240)
3	4.0(0.157)	8.1(0.318)
4	6.0(0.236)	10.1(0.397)
5	8.0(0.315)	12.1(0.476)
6	10.0(0.394)	14.1(0.555)
7	12.0(0.472)	16.1(0.634)
8	14.0(0.551)	18.1(0.713)
9	16.0(0.630)	20.1(0.791)
10	18.0(0.709)	22.1(0.870)
11	20.0(0.787)	24.1(0.949)
12	22.0(0.866)	26.1(1.028)
13	24.0(0.945)	28.1(1.106)
14	26.0(1.024)	30.1(1.185)
15	28.0(1.102)	32.1(1.263)
16	30.0(1.181)	34.1(1.343)
17	32.0(1.259)	36.1(1.421)
18	34.0(1.338)	38.1(1.500)
19	36.0(1.417)	40.1(1.579)
20	38.0(1.496)	42.1(1.657)

DISTRIBUTOR



WW elektronik s.c.
Ul. Kraszewskiego 26
81-881 Sopot
Poland / Europe

<http://www.wwelektronik.com.pl>
info@wwelektronik.com.pl
tel.: +48 58 551 11 15
fax.: +48 58 550 45 17

UNIT

SCALE

PART NAME

MM

4:1

P:2.0MM PH WAFER 180°

APPD.

CKD.

TOLERANCE

PART NO.

REV.

± 0.5

W2103-XXPSSXBX

B