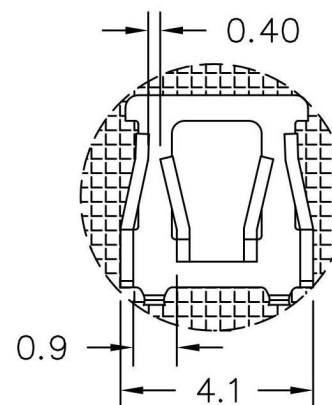
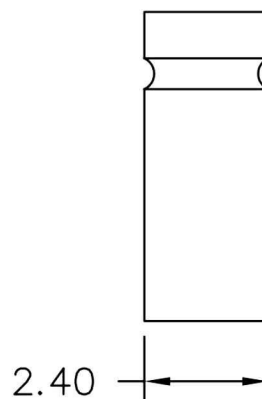
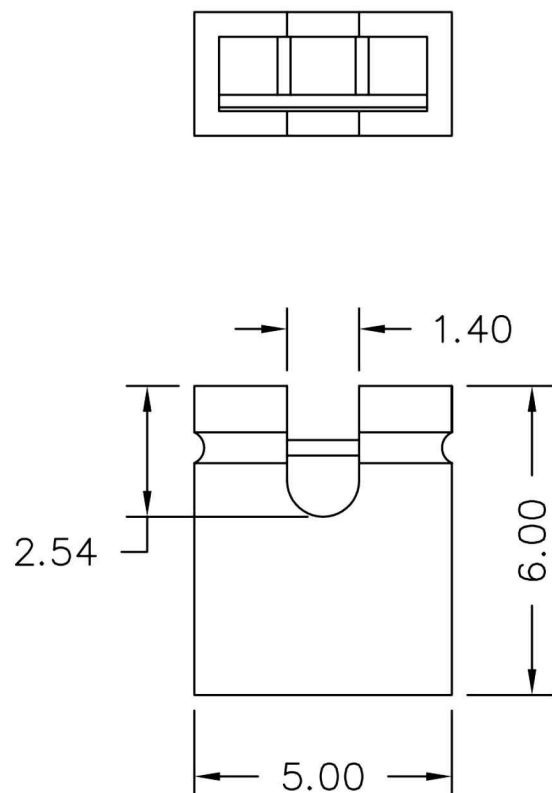


C	2700	—	02	A	A	X	X	0	X	R
1	2		3	4	5	6	7	8	9	10

- | | | | |
|-----------------------------------|---|---|--|
| 1. PRODUCTS:
C:Connector | 5. TYPE OPTION:
A:Open Type | 7. INSULATOR COLOR:
B:Black
G:Grey
W:White
L:Blue
R:Red
Y:Yellow
E:Green | 8. FILL IT WITH "0"
9. OPTION:
0:2000pcs/Bag
1:1000pcs/Bag
2:5000pcs/Bag
10. R:ROHS |
| 2. SERIES NO.:
2700 | 6. CONTACT PLATING:
T:Tin
G:Gold Flash
A:Gold 5U"
B:Gold 10U"
C:Gold 15U"
D:Gold 30U" | | |
| 3. CONTACT NO.:
02,10 | | | |
| 4. INSULATOR HEIGHT:
A: 6.0 mm | | | |

MATERIAL

Insulator : PBT+30% Glass fiber
Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : 500V AC for one minute
Operation Temperature : -55°C to +105°C

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE 容許公差 0 ±0.30 .00 ±0.20 ANG ±3°	PART NAME 品名 2.54mm MINI JUMPER 2P H:6.0mm OPEN COVER ROHS
DWG. 製圖 HELEN	UNIT 單位 MM	SIZE. 紙張尺寸 A4	PART NO. 料號 C2700-02AAXX00R
DATE 制表日 2018/12/17	PAGE 張數 1 OF 1	REV. 版次 C	