
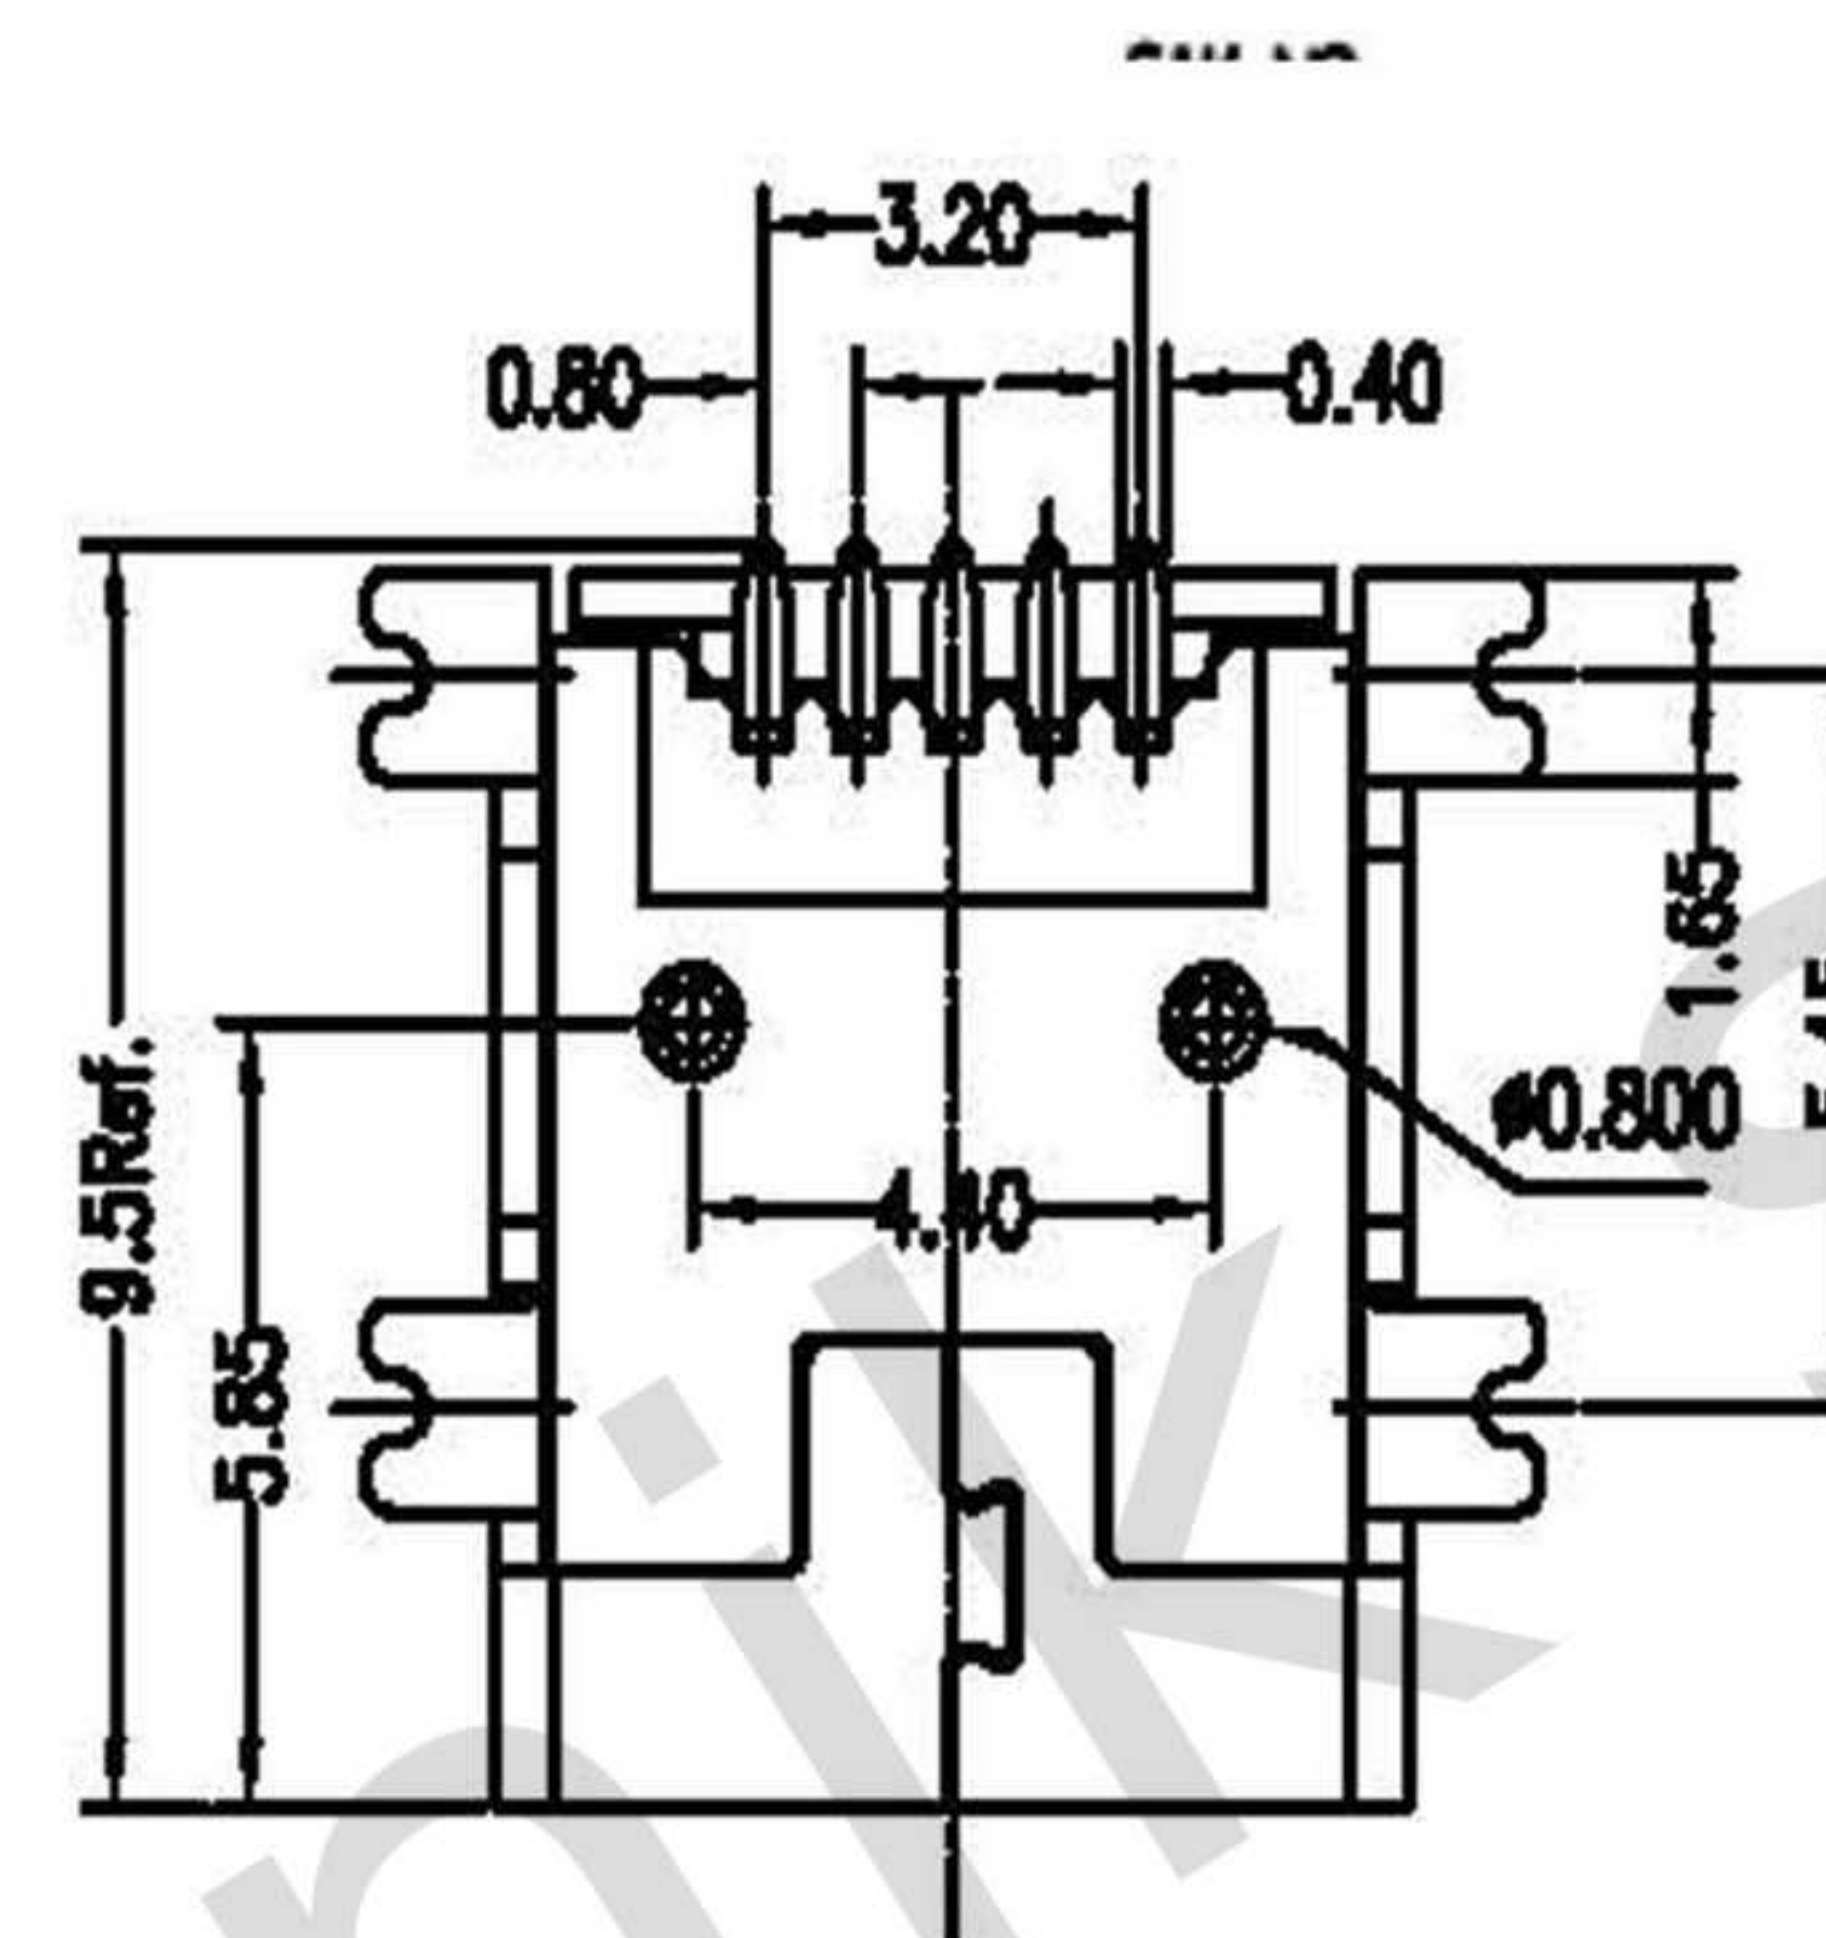
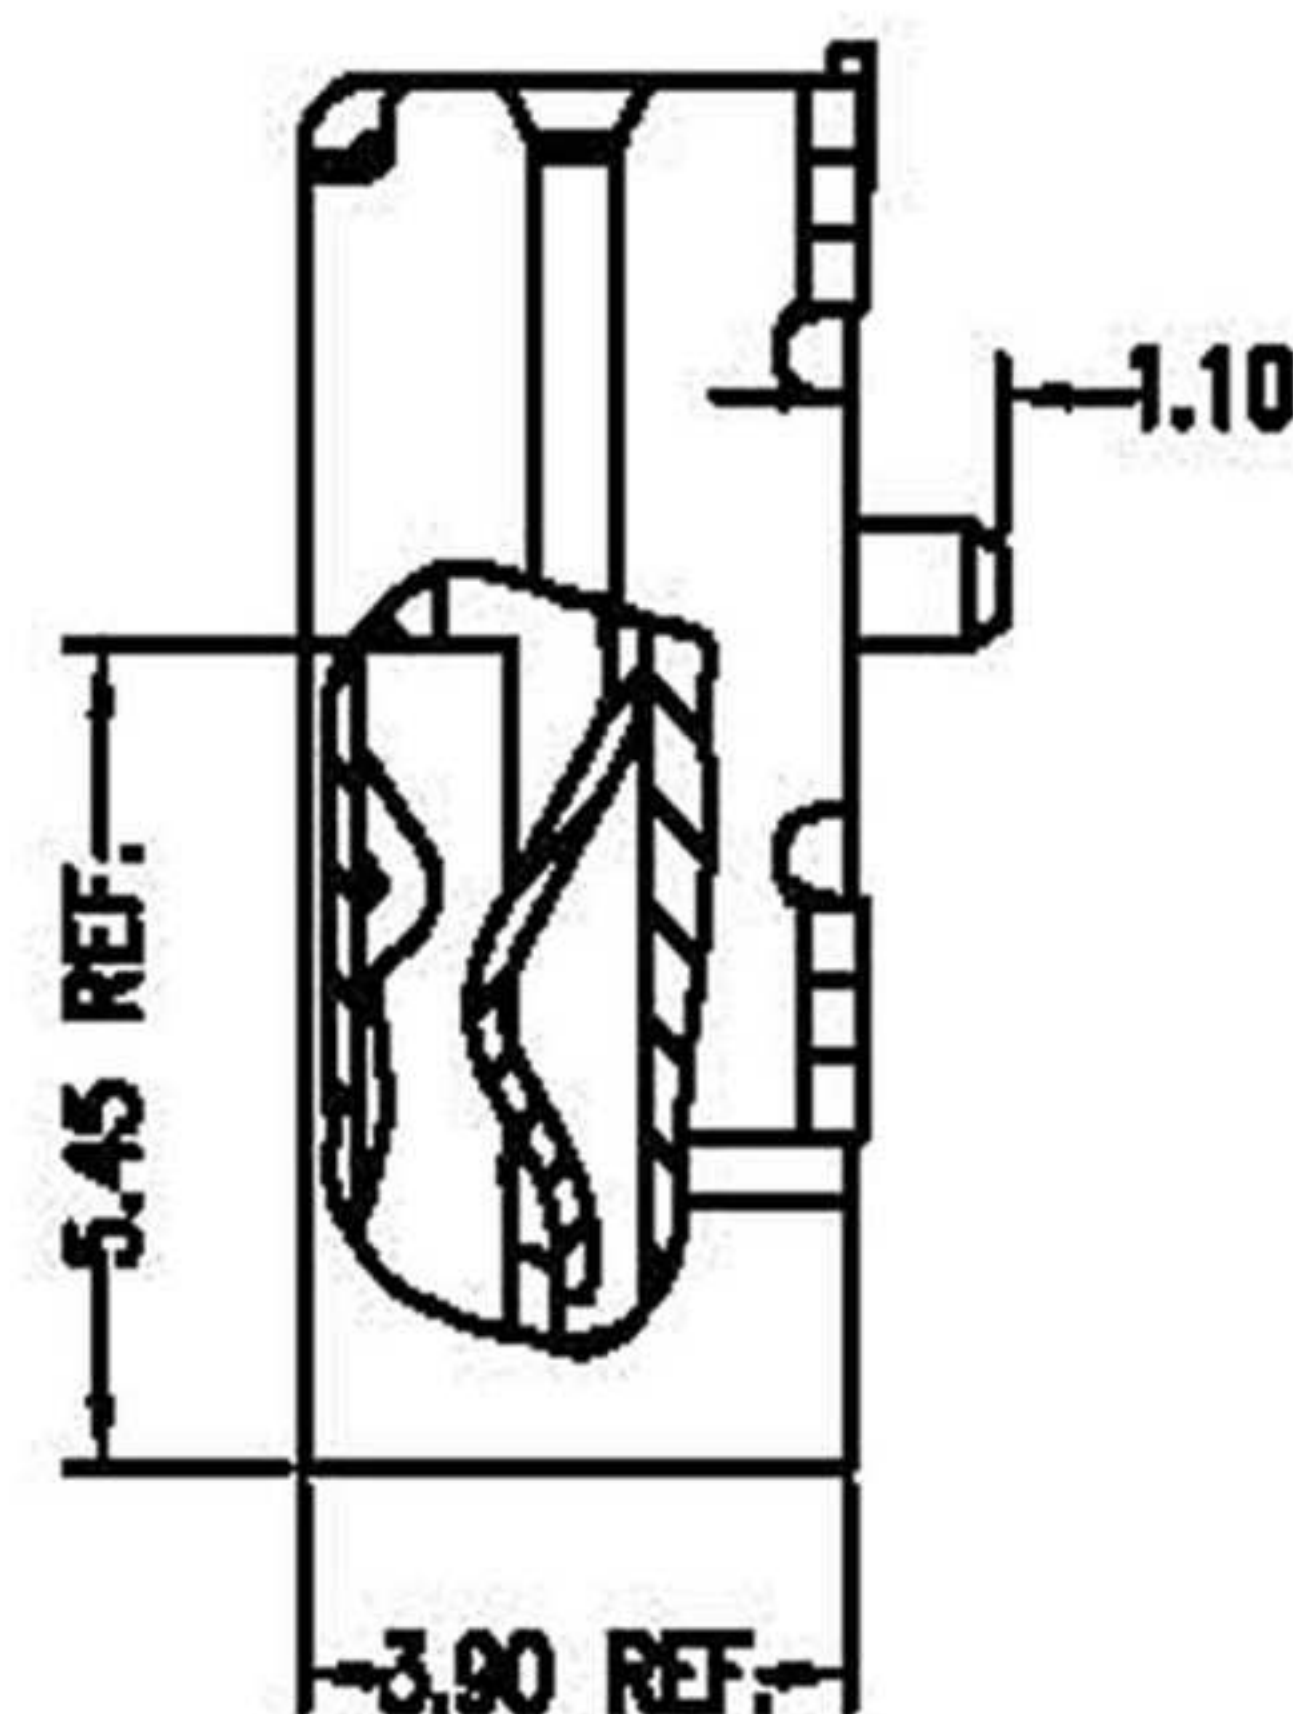


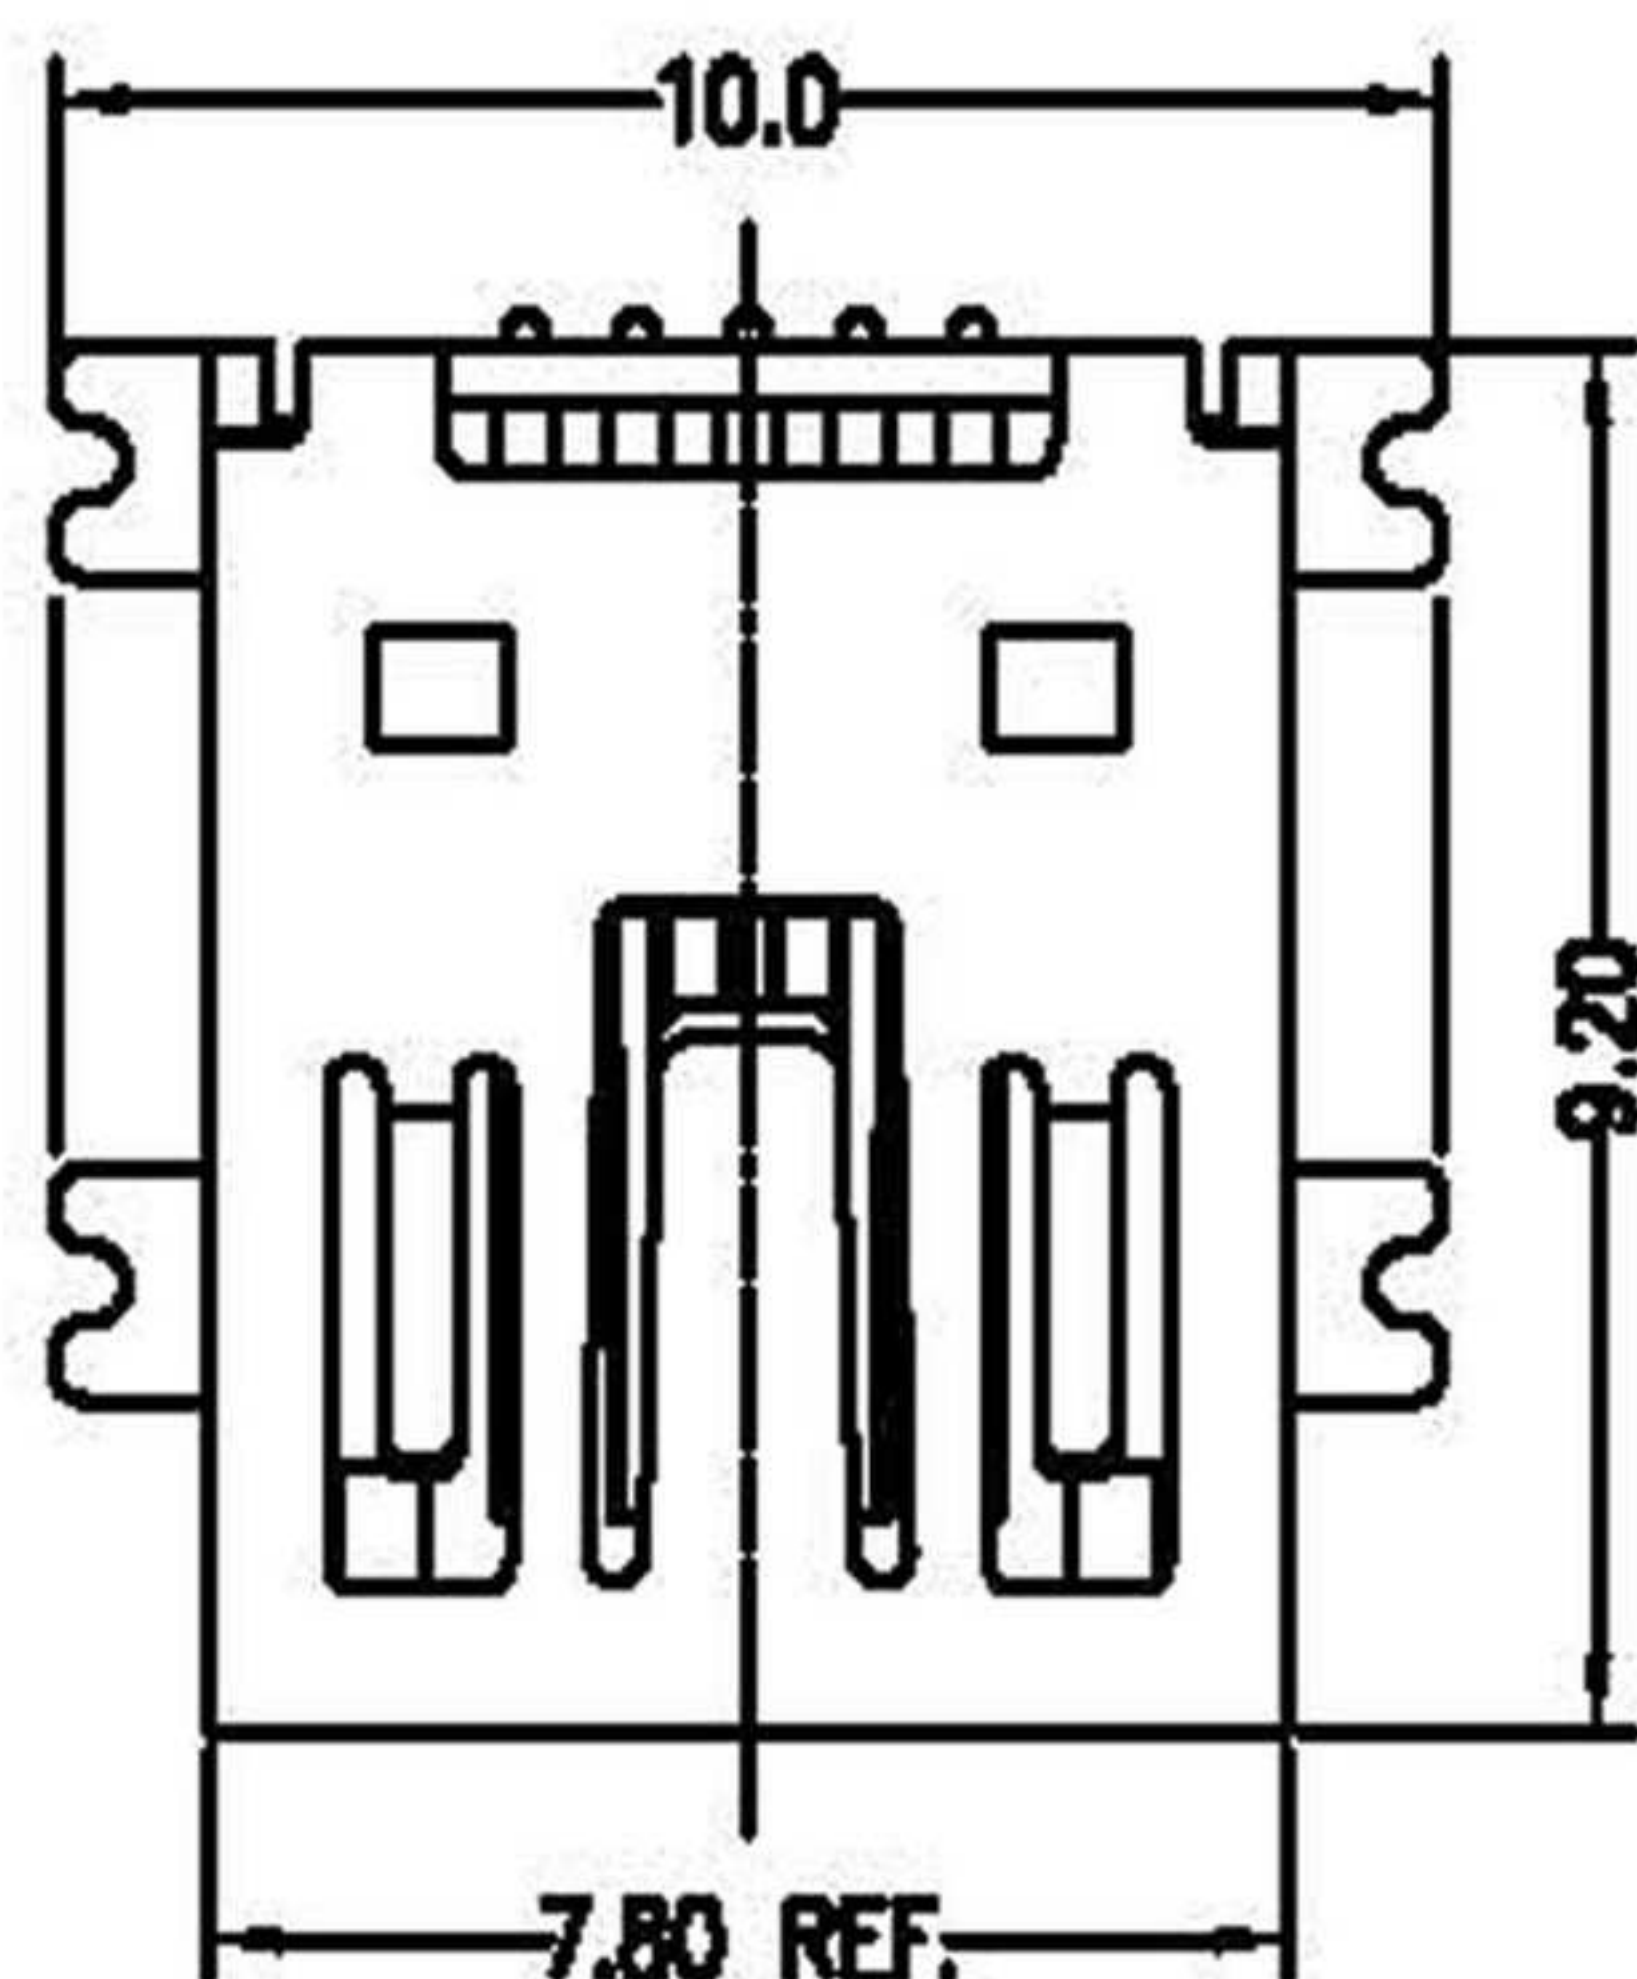

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1.5 Amperes.

Dielectric Withstanding Voltage: AC 100V at sea level.

Insulation Resistance: 100 Megohms Min.

Contact Resistance: 30 Milliohms Max.

Operating Temperature: 0°C to +50°C

MECHANICAL CHARACTERISTICS

Total Mating Force: 3.57 kgf. Max.



Total Unmating Force: 0.71 kgf. Min.

MATERIAL

Contacts: Copper Alloy.

Insulator: Lcp.

Shell: Copper Alloy

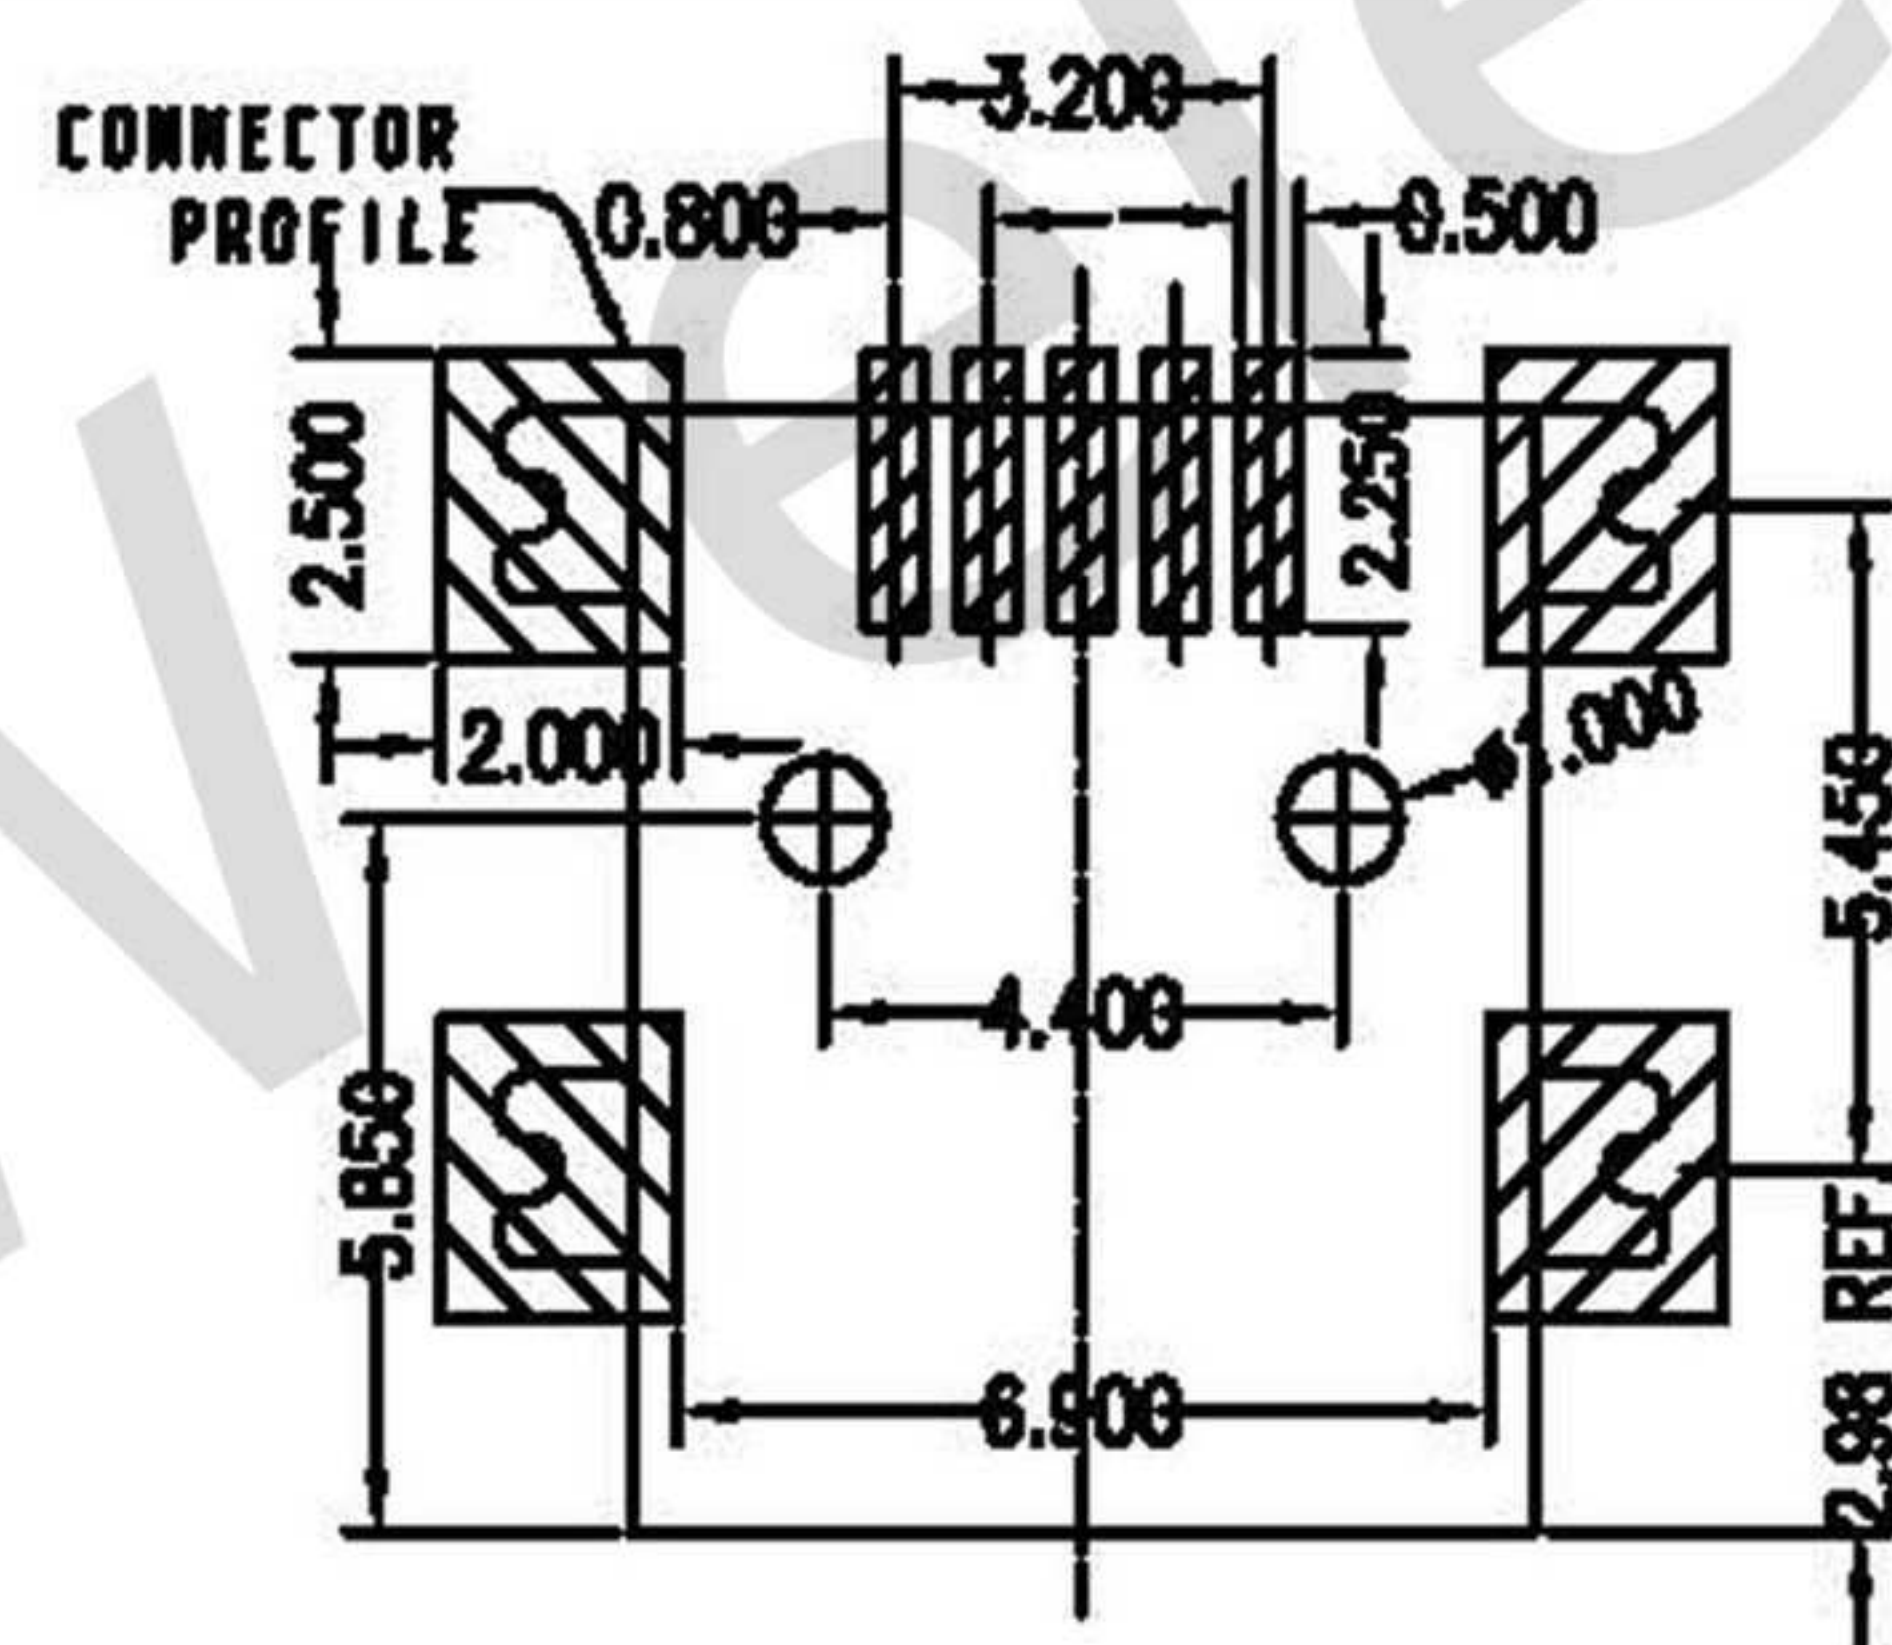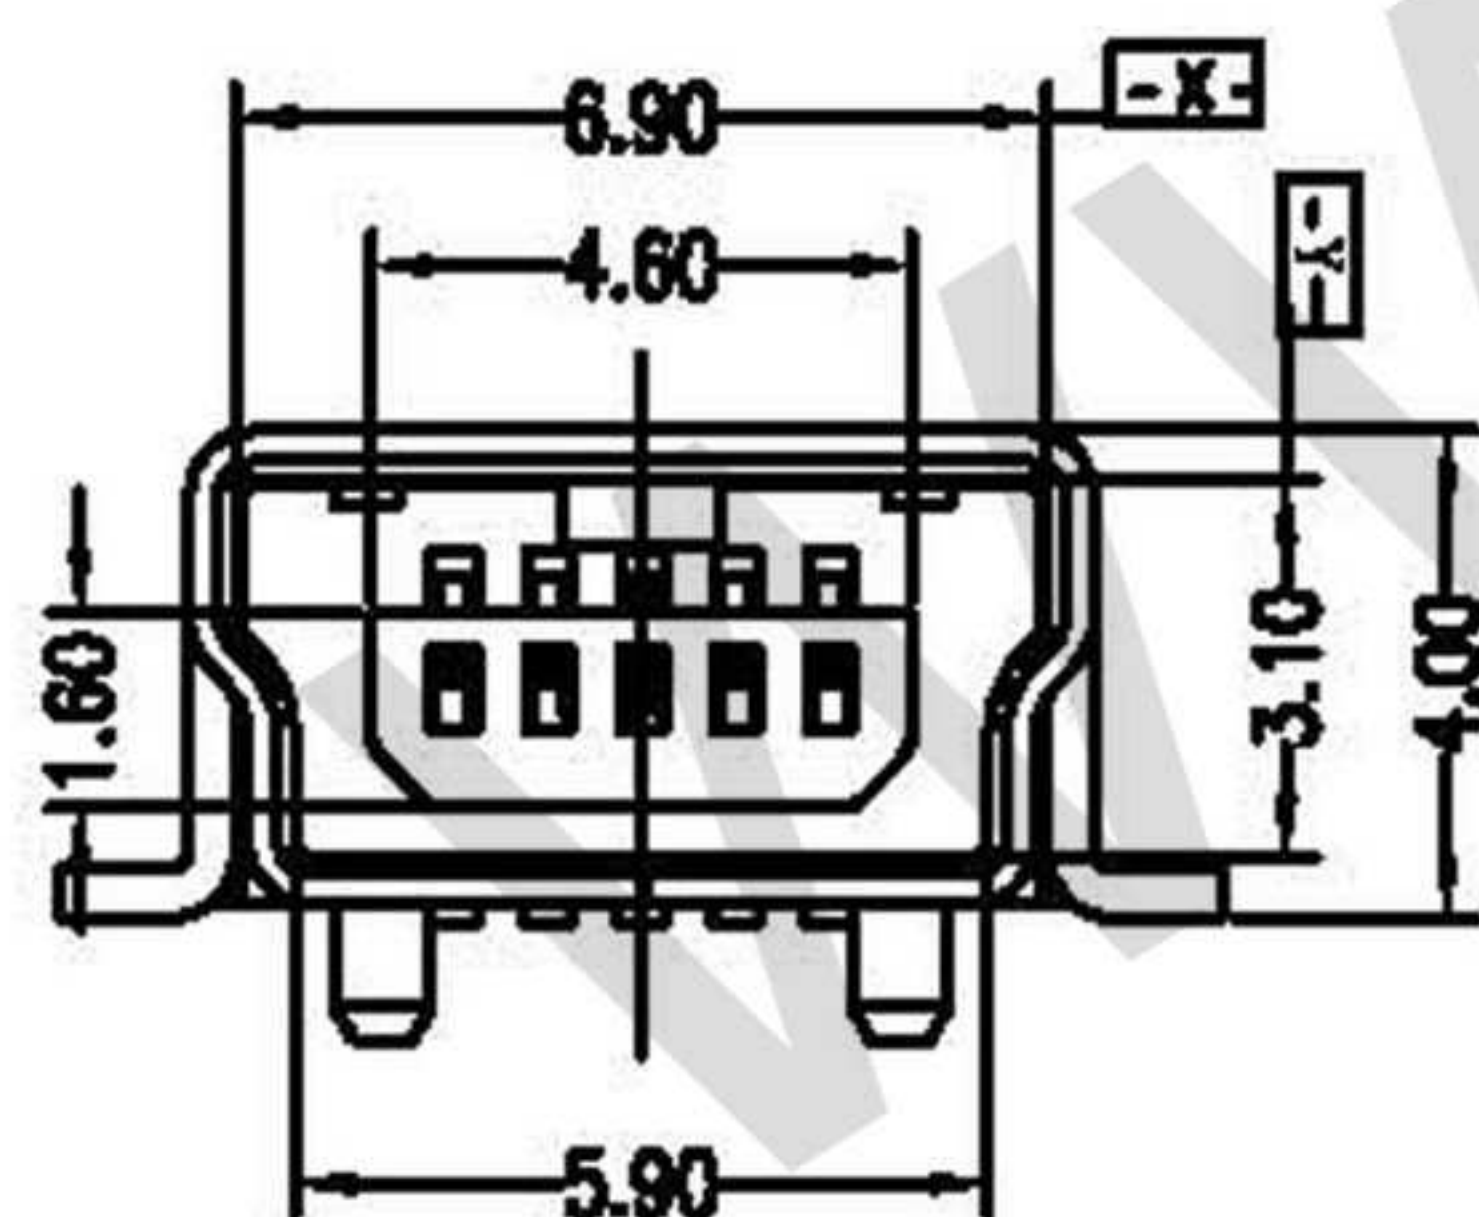

TOLERANCES: ± 0.10
RECOMMEND PCB LAYOUT

Oznaczenie	MUSB-05 BSMT	
Opis	MINI USB(1.1) 5P FEMALE PCB SMT TYPE PLASTICS POLARIZING PES 4.4mm BLACK INSULATOR ROHS LOW-LEAD	
	WW elektronik s.c. ul. Kraszewskiego 26 81-815 Sopot	Tel. 058 551-11-15 fax. 058 550-45-17 e-mail: info@wwelektronik.com.pl
	www.wwelektronik.com.pl	