
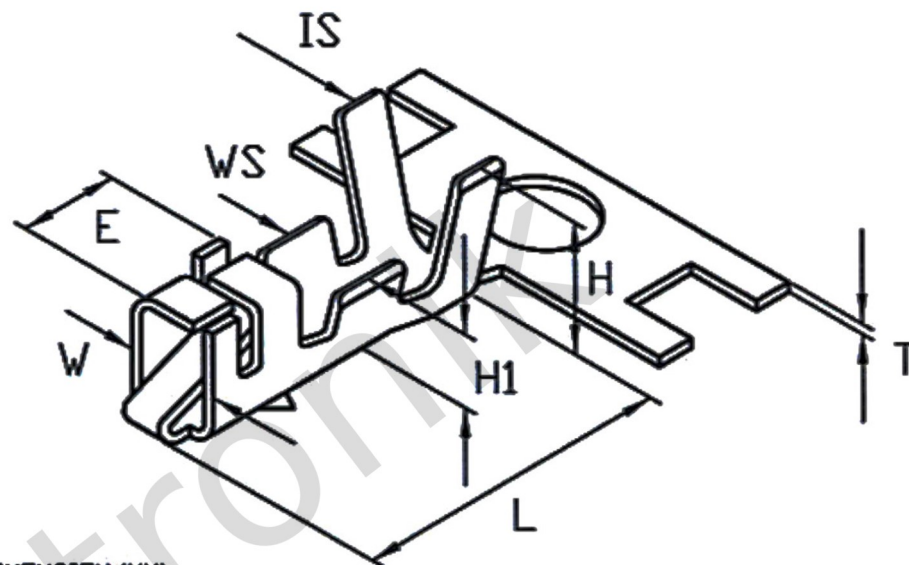


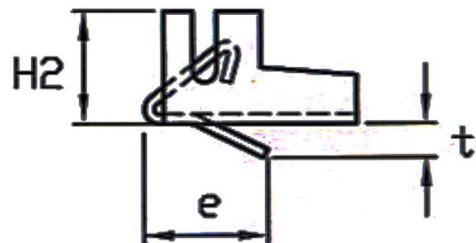

MATERIAL: BRASS

THICKNESS: 0.2

HARDNESS: SH

APPLICABLE WIRE: (AWG) 22-28

PLATING: TIN 40µ" MIN.

INSULATION O.D.: 1.75 MAX.

MATE: 0.025" (0.635MM) SQUARE PIN

CONTACT RESISTANCE: INITIAL VALUE / 10mΩ max.

AFTER ENVIRONMENTAL TESTING /
20mΩ max.

INSULATION RESISTANCE: 1.000MΩ min.

WITHSTANDING VOLTAGE: 1.000V AC / minute

VOLTAGE RATING: AC, DC, 250V

CURRENT RATING: AC, DC, 3A

TEMPERATURE RANGE: -25°C TO +85°C

DIMENSION: (MM)

T: 0.2 ± 0.03

L: 6.6 ± 0.25

E: 2.0 ± 0.25

W: $1.85^{+0.15}_{-0.1}$

IS: 3.0 ± 0.3

WS: 1.8 ± 0.3

H: 3.2 ± 0.25

H1: 1.4 ± 0.25

H2: 2.3 ± 0.15

t: $0.7^{+0.15}_{-0}$

e: 2.5 ± 0.15

Oznaczenie	JS-0213-T	
Opis	2.5mm TERMINAL BRASS MATERIAL TIN PLATING AWG22~28 1ROLL=8000 PCS ROHS LOW-LEAD	
	Ww elektronik ul. Kraszewskiego 26 81-815 Sopot	Tel. 058 551-11-15 fax. 058 550-45-17 e-mail: info@wwelektronik.com.pl
	www.wwelektronik.com.pl	