


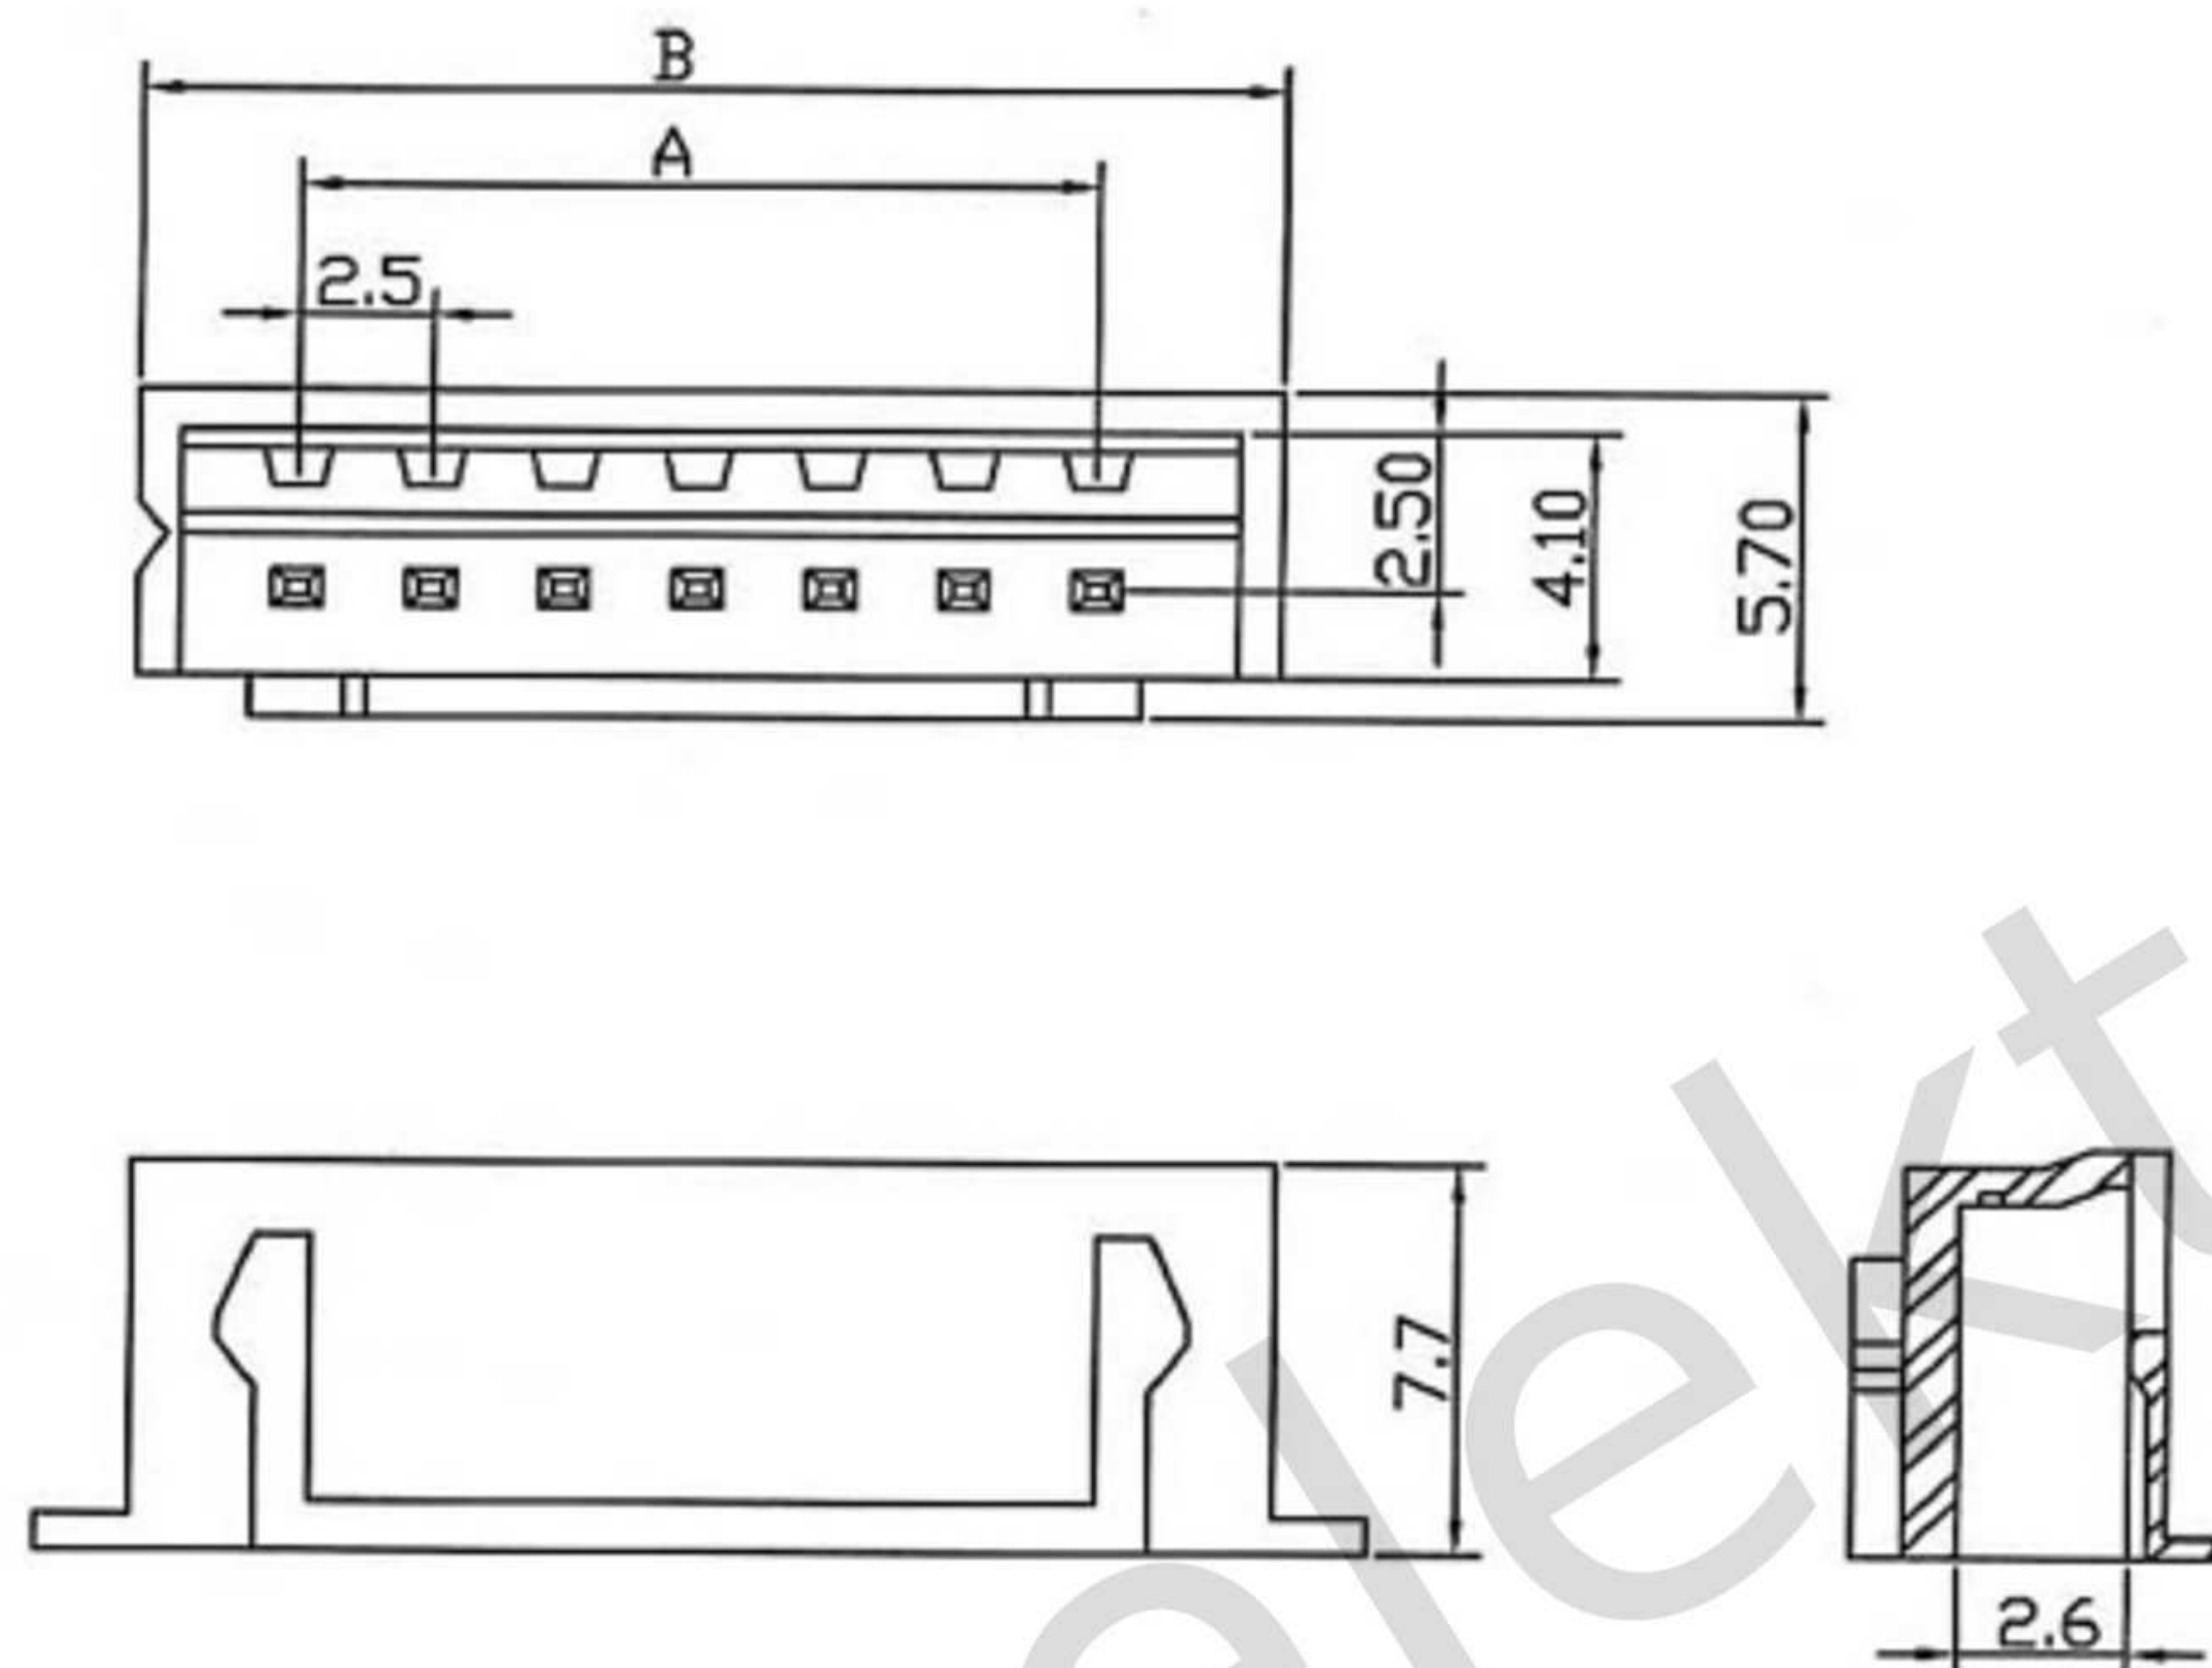

SPECIFICATION

Electric

Current Rating: 2A AC, DC

Voltage Rating: 250V AC, DC

Temperature Range: -25° C ~+85° C

Contact Resistance: 20m ohms max.

Insulation Resistance: 1,000M ohms Min.

Withstanding Voltage: 1,000V AC/minute.

Material: Nylon 66, UL94V-0

POLES	A	B
02	2.50	7.30
03	5.00	9.80
04	7.50	12.30
05	10.00	14.80
06	12.50	17.30
07	15.00	19.80
08	17.50	22.30
09	20.00	24.80
10	22.50	27.30
11	25.00	29.80
12	27.50	32.30
13	30.00	34.80
14	32.50	37.30
15	35.00	39.80
16	37.50	42.30
17	40.00	44.80
18	42.50	47.30
19	45.00	49.80
20	47.50	52.30

Oznaczenie	JS-0213H	
Opis	Crimp terminal housing 2,50mm	
	WW elektronik s.c. ul. Kraszewskiego 26 81-815 Sopot	Tel. 058 551-11-15 fax. 058 550-45-17 e-mail: info@wwelektronik.com.pl
	www.wwelektronik.com.pl	