


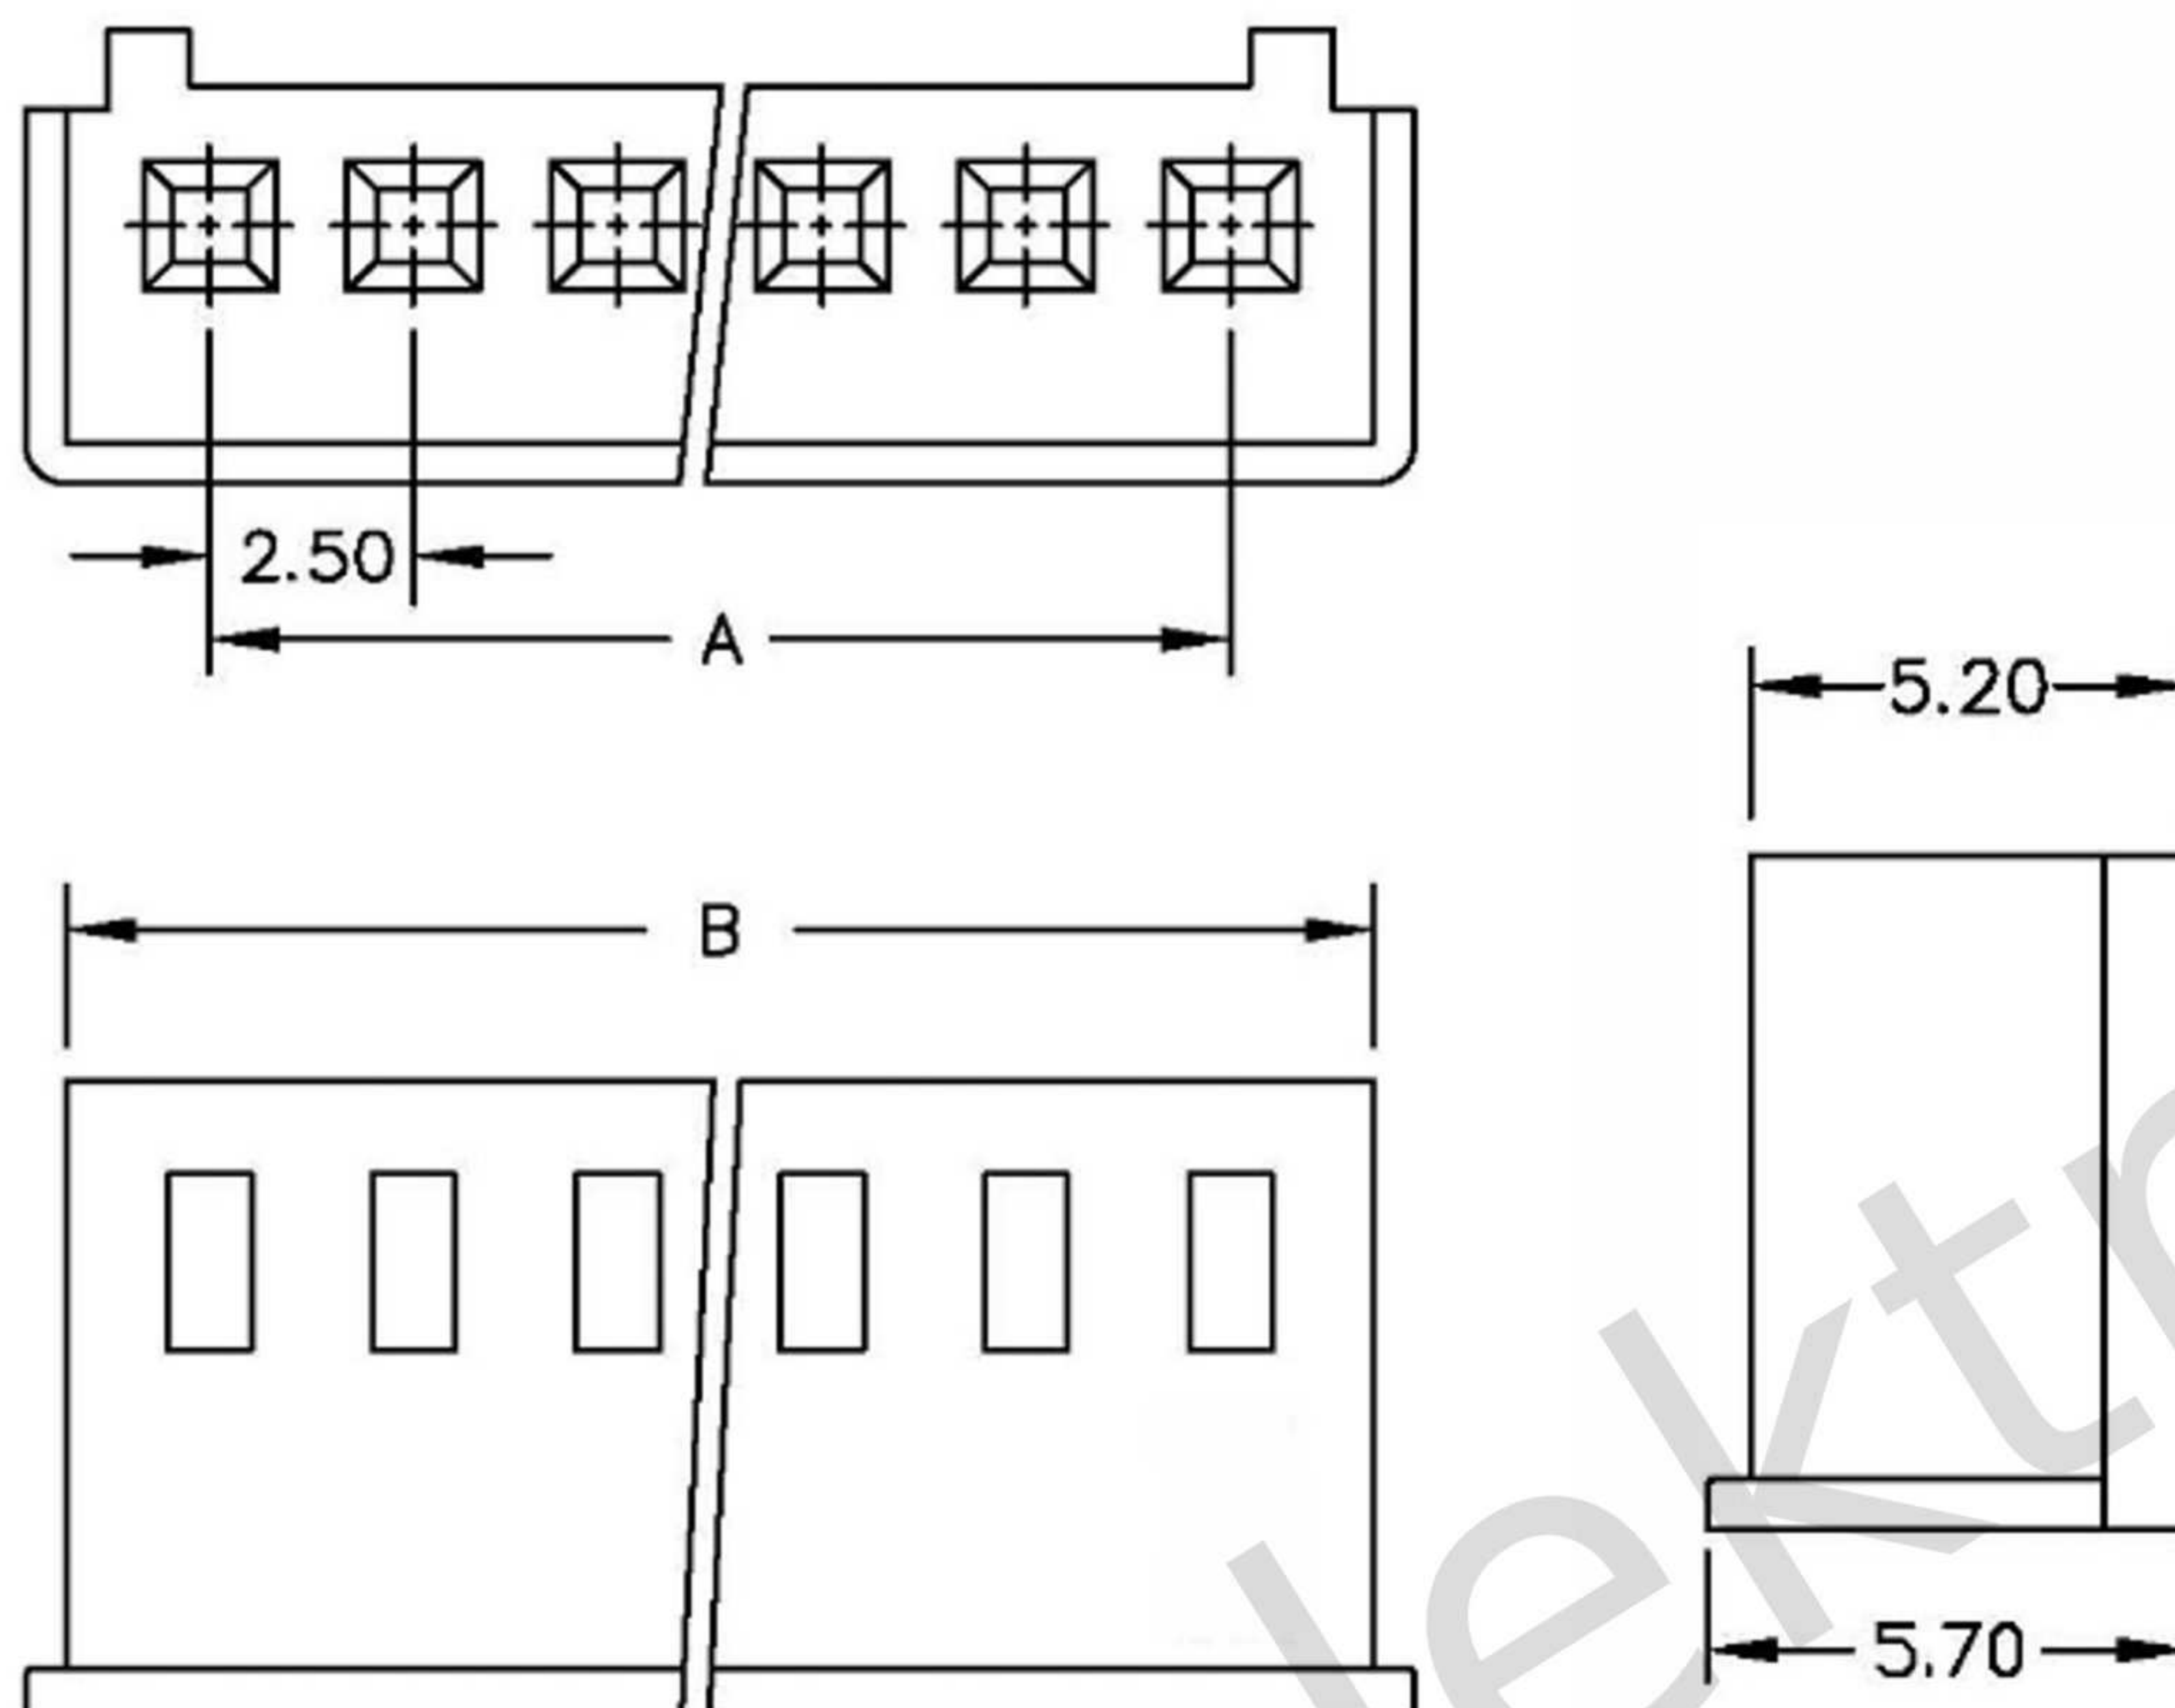

## SPECIFICATIONS

Current rating : 2A AC,DC

Voltage rating : 250V AC,DC

Temperature range : -25°C to +85 °C

Contact resistance : 20mΩ Max.

Insulation resistance : 1000MΩ Min.

Withstanding voltage : 800V AC/minute

Material : Nylon 66, UL94V-2

## Ordering Information & Dimensions

| Poles | Dimension (mm) |       |
|-------|----------------|-------|
|       | A              | B     |
| 2     | 2.50           | 6.00  |
| 3     | 5.00           | 8.50  |
| 4     | 7.50           | 11.00 |
| 5     | 10.00          | 13.50 |
| 6     | 12.50          | 16.00 |
| 7     | 15.00          | 18.50 |
| 8     | 17.50          | 21.00 |
| 9     | 20.00          | 23.50 |
| 10    | 22.50          | 26.00 |
| 11    | 25.00          | 28.50 |
| 12    | 27.50          | 31.00 |

|                                                                                       |                                                                      |                                                                                                                            |
|---------------------------------------------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Oznaczenie                                                                            | JS-2560H                                                             |                                                                                                                            |
| Opis                                                                                  | Crimp terminal housing 2,50mm                                        |                                                                                                                            |
|  | WW elektronik s.c.<br>ul. Kraszewskiego 26<br>81-815 Sopot           | Tel. 058 551-11-15<br>fax. 058 550-45-17<br>e-mail: <a href="mailto:info@wwelektronik.com.pl">info@wwelektronik.com.pl</a> |
|                                                                                       | <a href="http://www.wwelektronik.com.pl">www.wwelektronik.com.pl</a> |                                                                                                                            |