
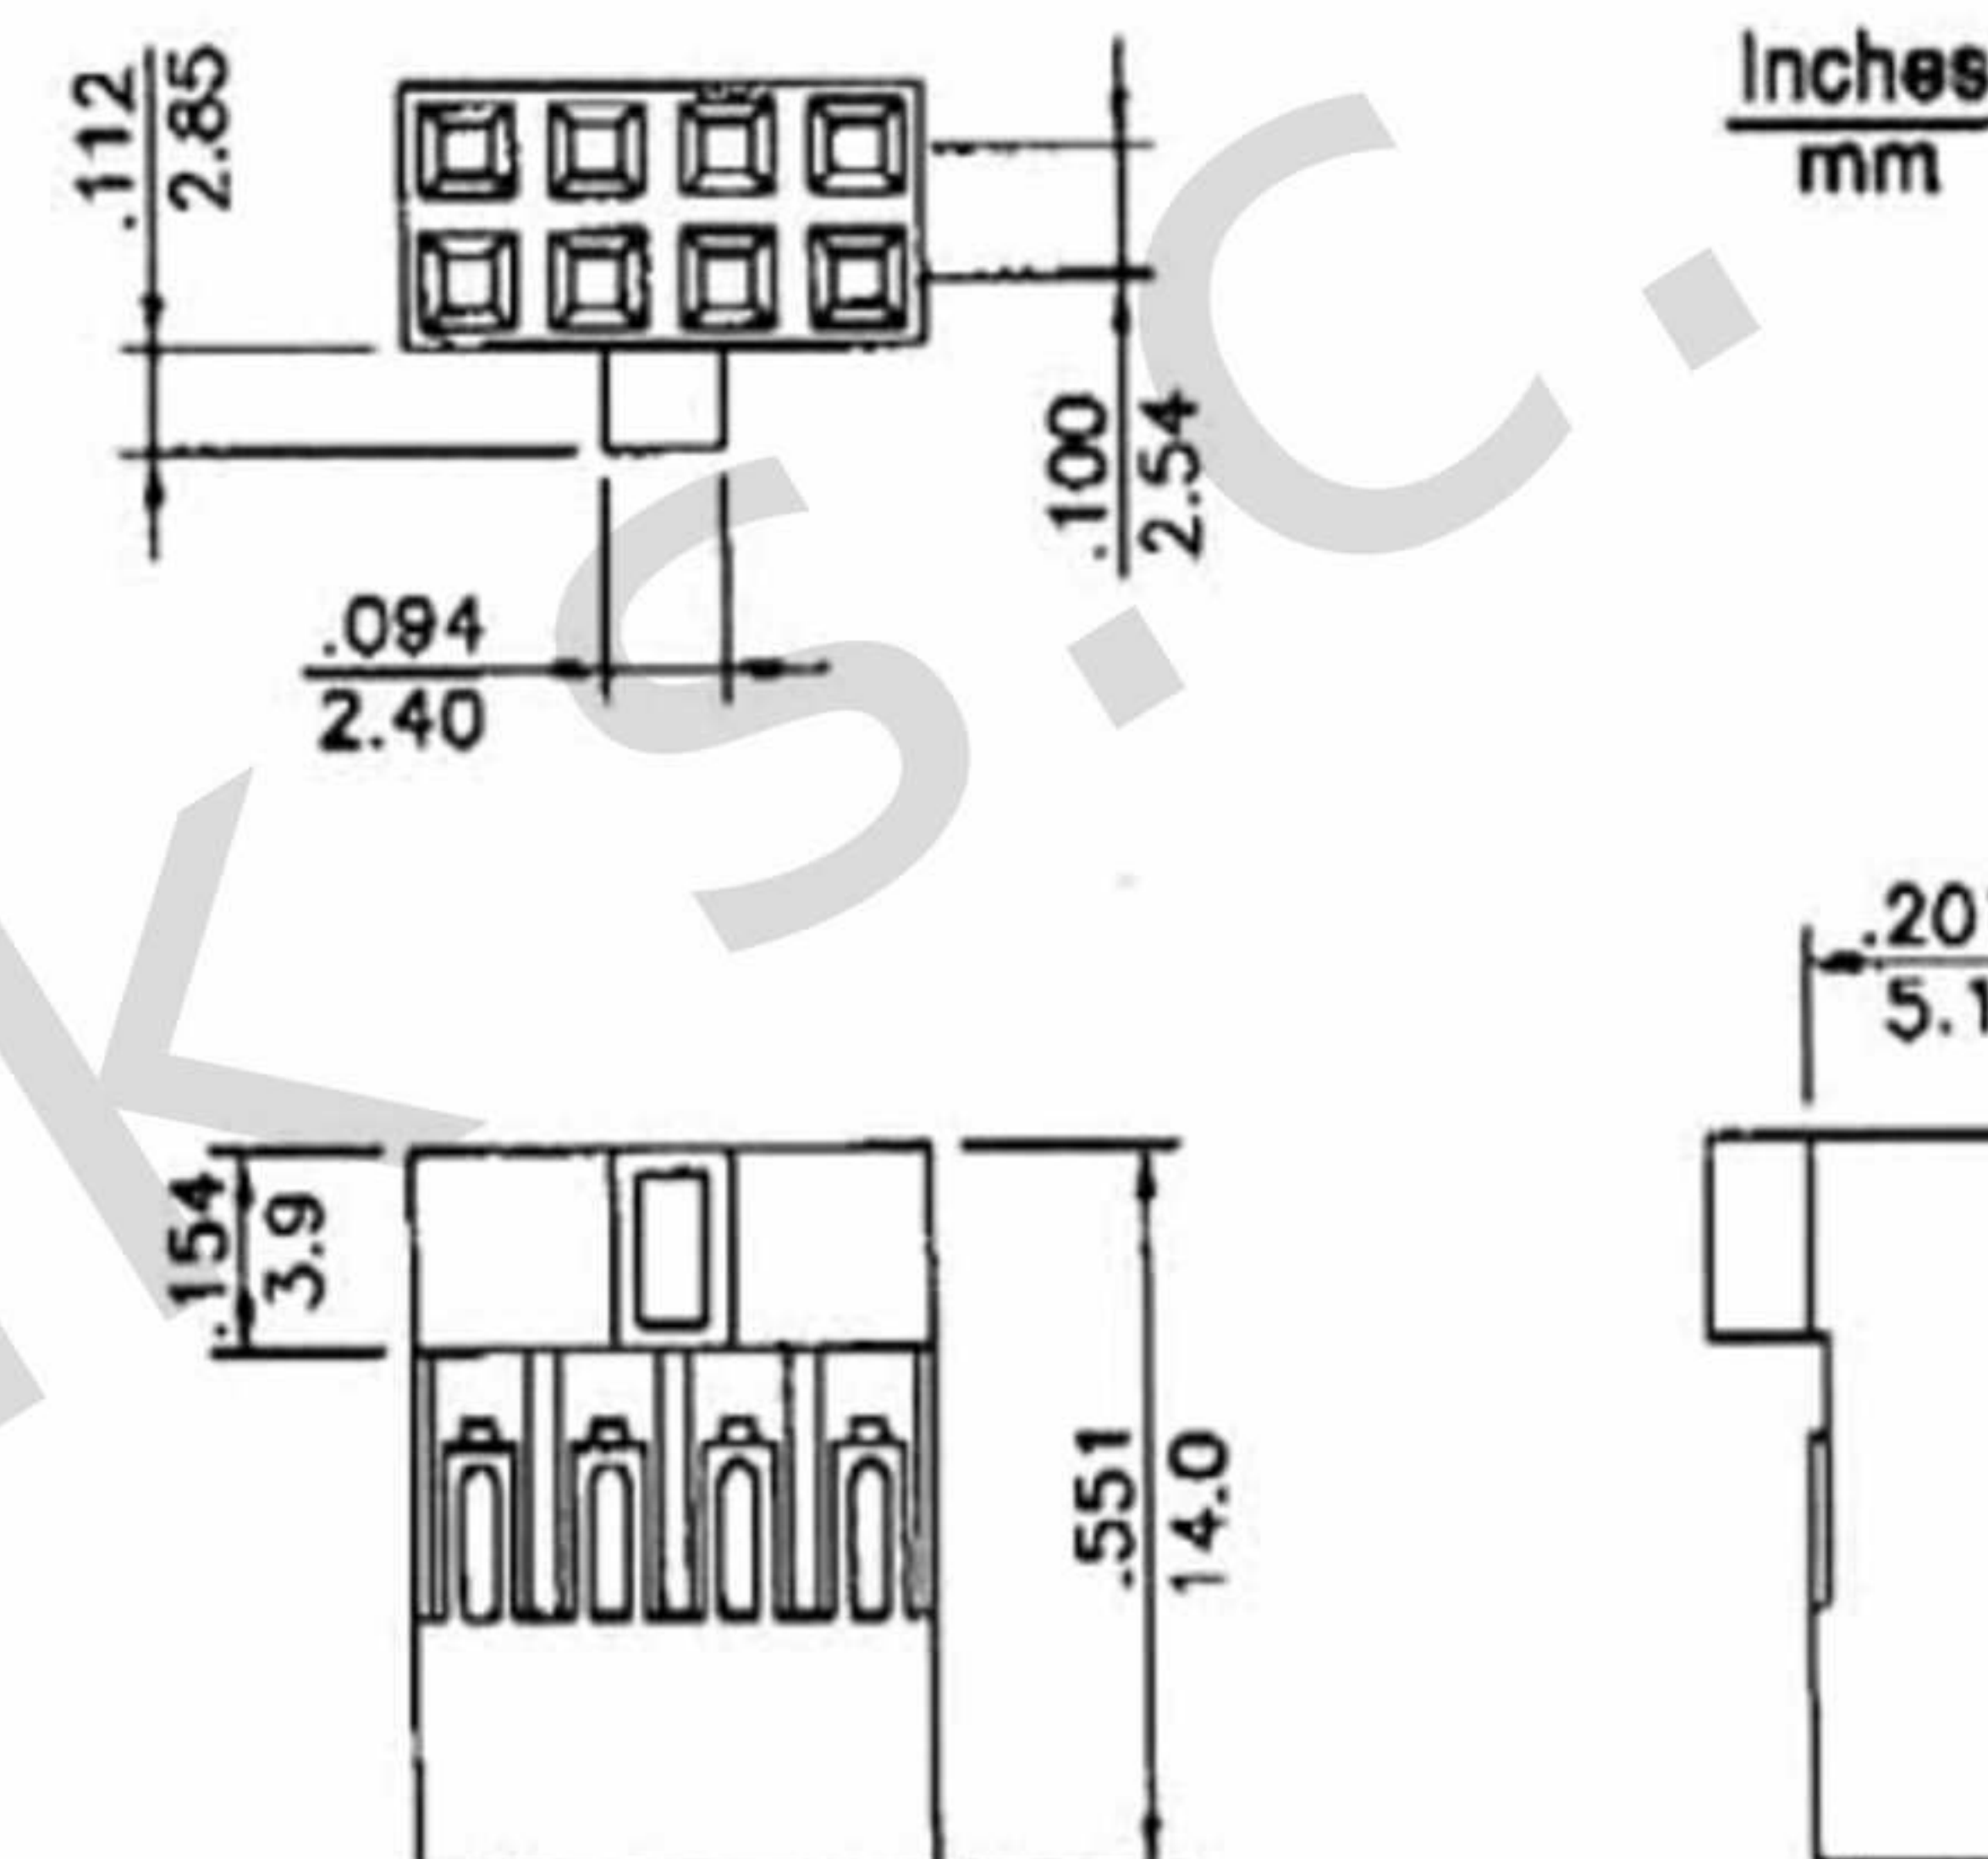


- * Poles: 4–80
- * Material: NORYL–V2 ,BLACK

Specifications

- * Current rating: 3A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000M Ω min.
- * Withstand voltage: 800V AC/minute

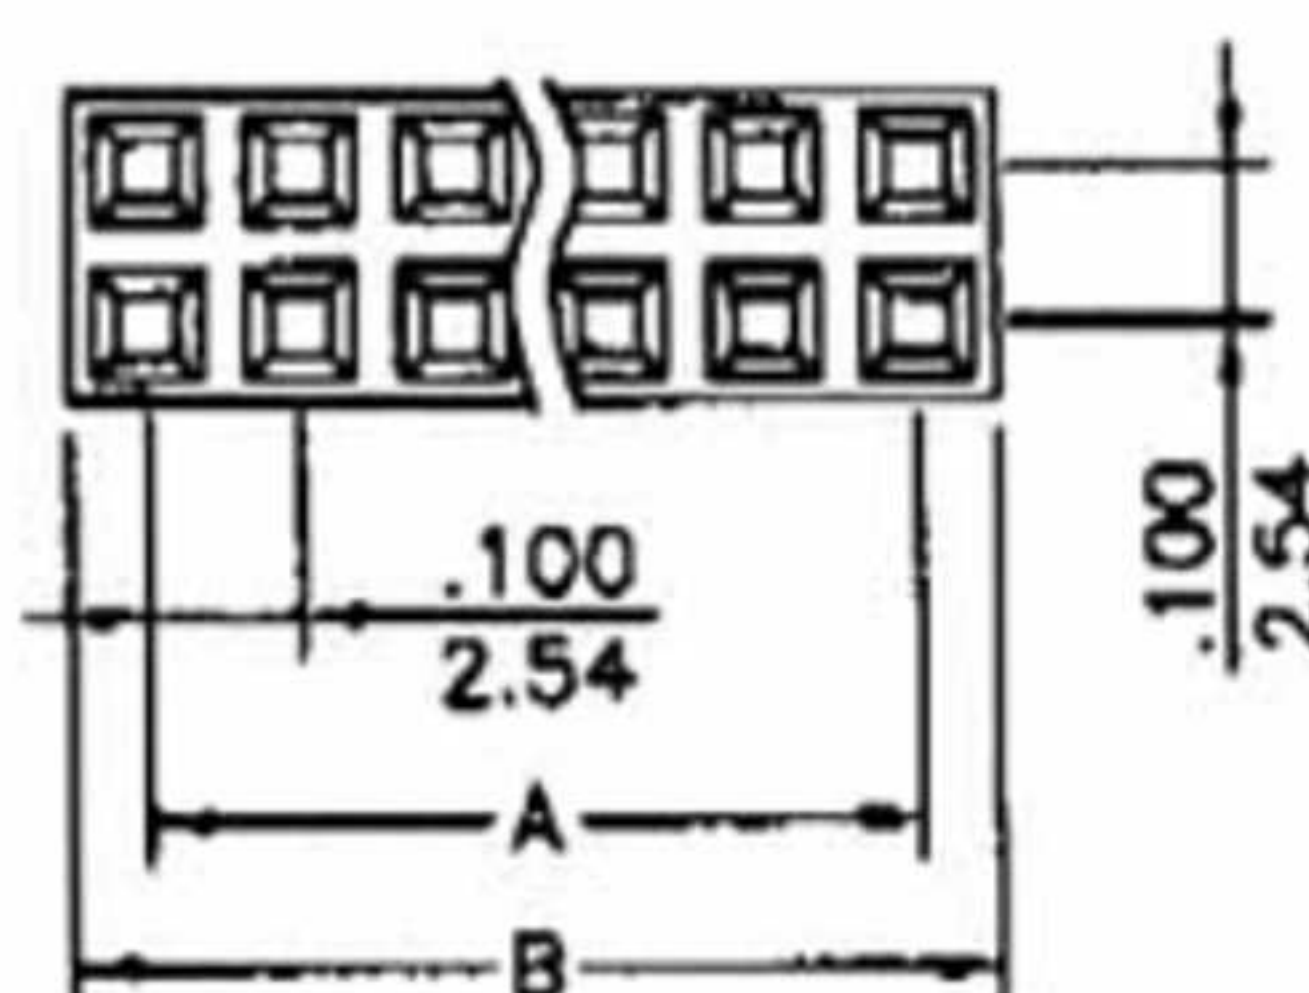

CIRCUITS	DIMENSION in.(mm)		CIRCUITS	DIMENSION in.(mm)	
	A	B		A	B
4	0.100(2.54)	0.200(5.08)	44	2.100(53.34)	2.200(55.88)
6	0.200(5.08)	0.300(7.62)	46	2.200(55.88)	2.300(58.42)
8	0.300(7.62)	0.400(10.16)	48	2.300(58.42)	2.400(60.96)
10	0.400(10.16)	0.500(12.70)	50	2.400(60.96)	2.500(63.50)
12	0.500(12.70)	0.600(15.24)	52	2.500(63.50)	2.600(66.04)
14	0.600(15.24)	0.700(17.78)	54	2.600(66.04)	2.700(68.58)
16	0.700(17.78)	0.800(20.32)	56	2.700(68.58)	2.800(71.12)
18	0.800(20.32)	0.900(22.86)	58	2.800(71.12)	2.900(73.66)
20	0.900(22.86)	1.000(25.40)	60	2.900(73.66)	3.000(76.20)
22	1.000(25.40)	1.100(27.94)	62	3.000(76.20)	3.100(78.74)
24	1.100(27.94)	1.200(30.48)	64	3.100(78.74)	3.200(81.28)
26	1.200(30.48)	1.300(33.02)	66	3.200(81.28)	3.300(83.82)
28	1.300(33.02)	1.400(35.56)	68	3.300(83.82)	3.400(86.36)
30	1.400(35.56)	1.500(38.10)	70	3.400(86.36)	3.500(88.90)
32	1.500(38.10)	1.600(40.64)	72	3.500(88.90)	3.600(91.44)
34	1.600(40.64)	1.700(43.18)	74	3.600(91.44)	3.700(93.98)
36	1.700(43.18)	1.800(45.72)	76	3.700(93.98)	3.800(96.52)
38	1.800(45.72)	1.900(48.26)	78	3.800(96.52)	3.900(99.06)
40	1.900(48.26)	2.000(50.80)	80	3.900(99.06)	4.000(101.60)
42	2.000(50.80)	2.100(53.34)	100	4.900(124.46)	5.000(127.00)

Oznaczenie	JS-1105-XX	
Opis	Crimp terminal housing 2,54mm	
	WW elektronik s.c. ul. Kraszewskiego 26 81-815 Sopot	Tel. 058 551-11-15 fax. 058 550-45-17 e-mail: info@wwelektronik.com.pl
	www.wwelektronik.com.pl	