

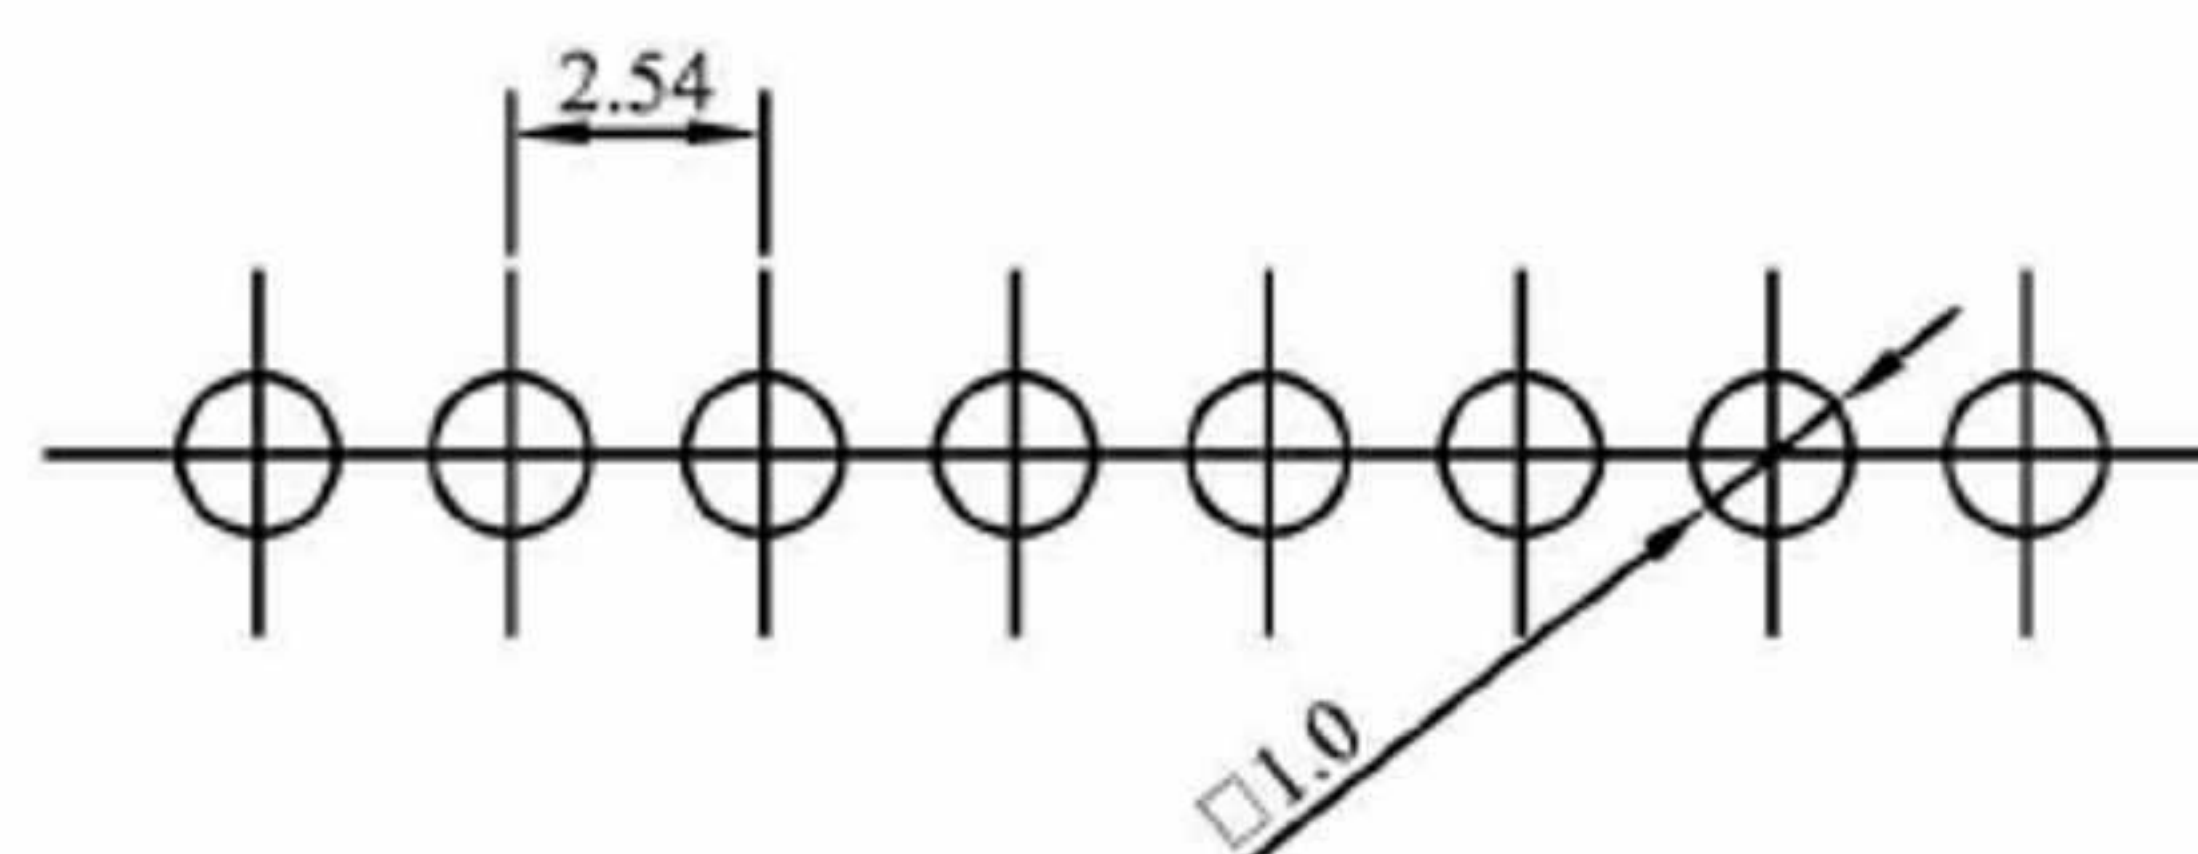
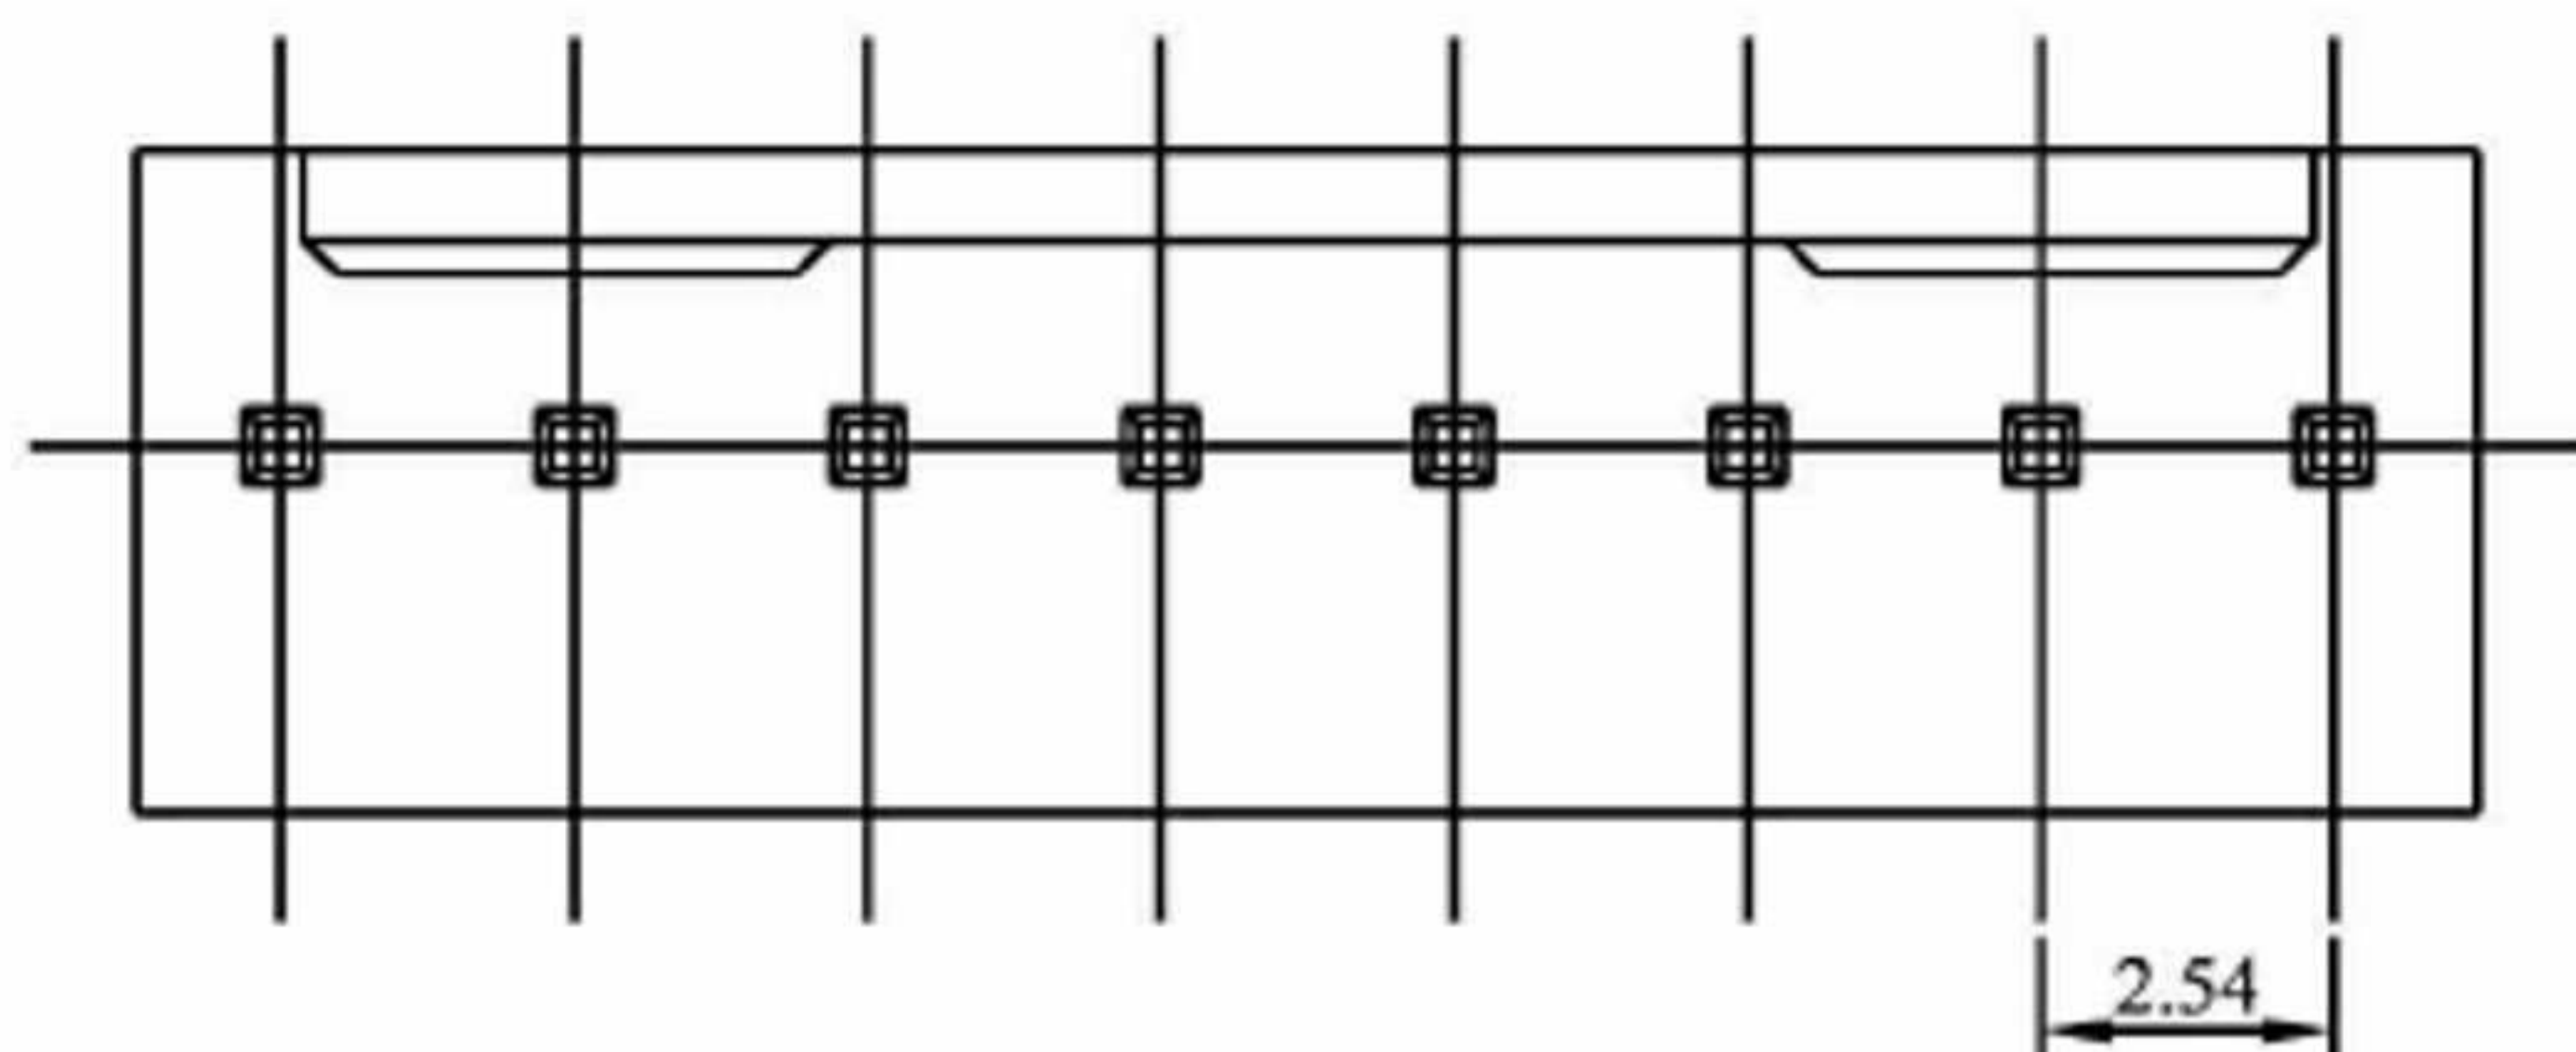


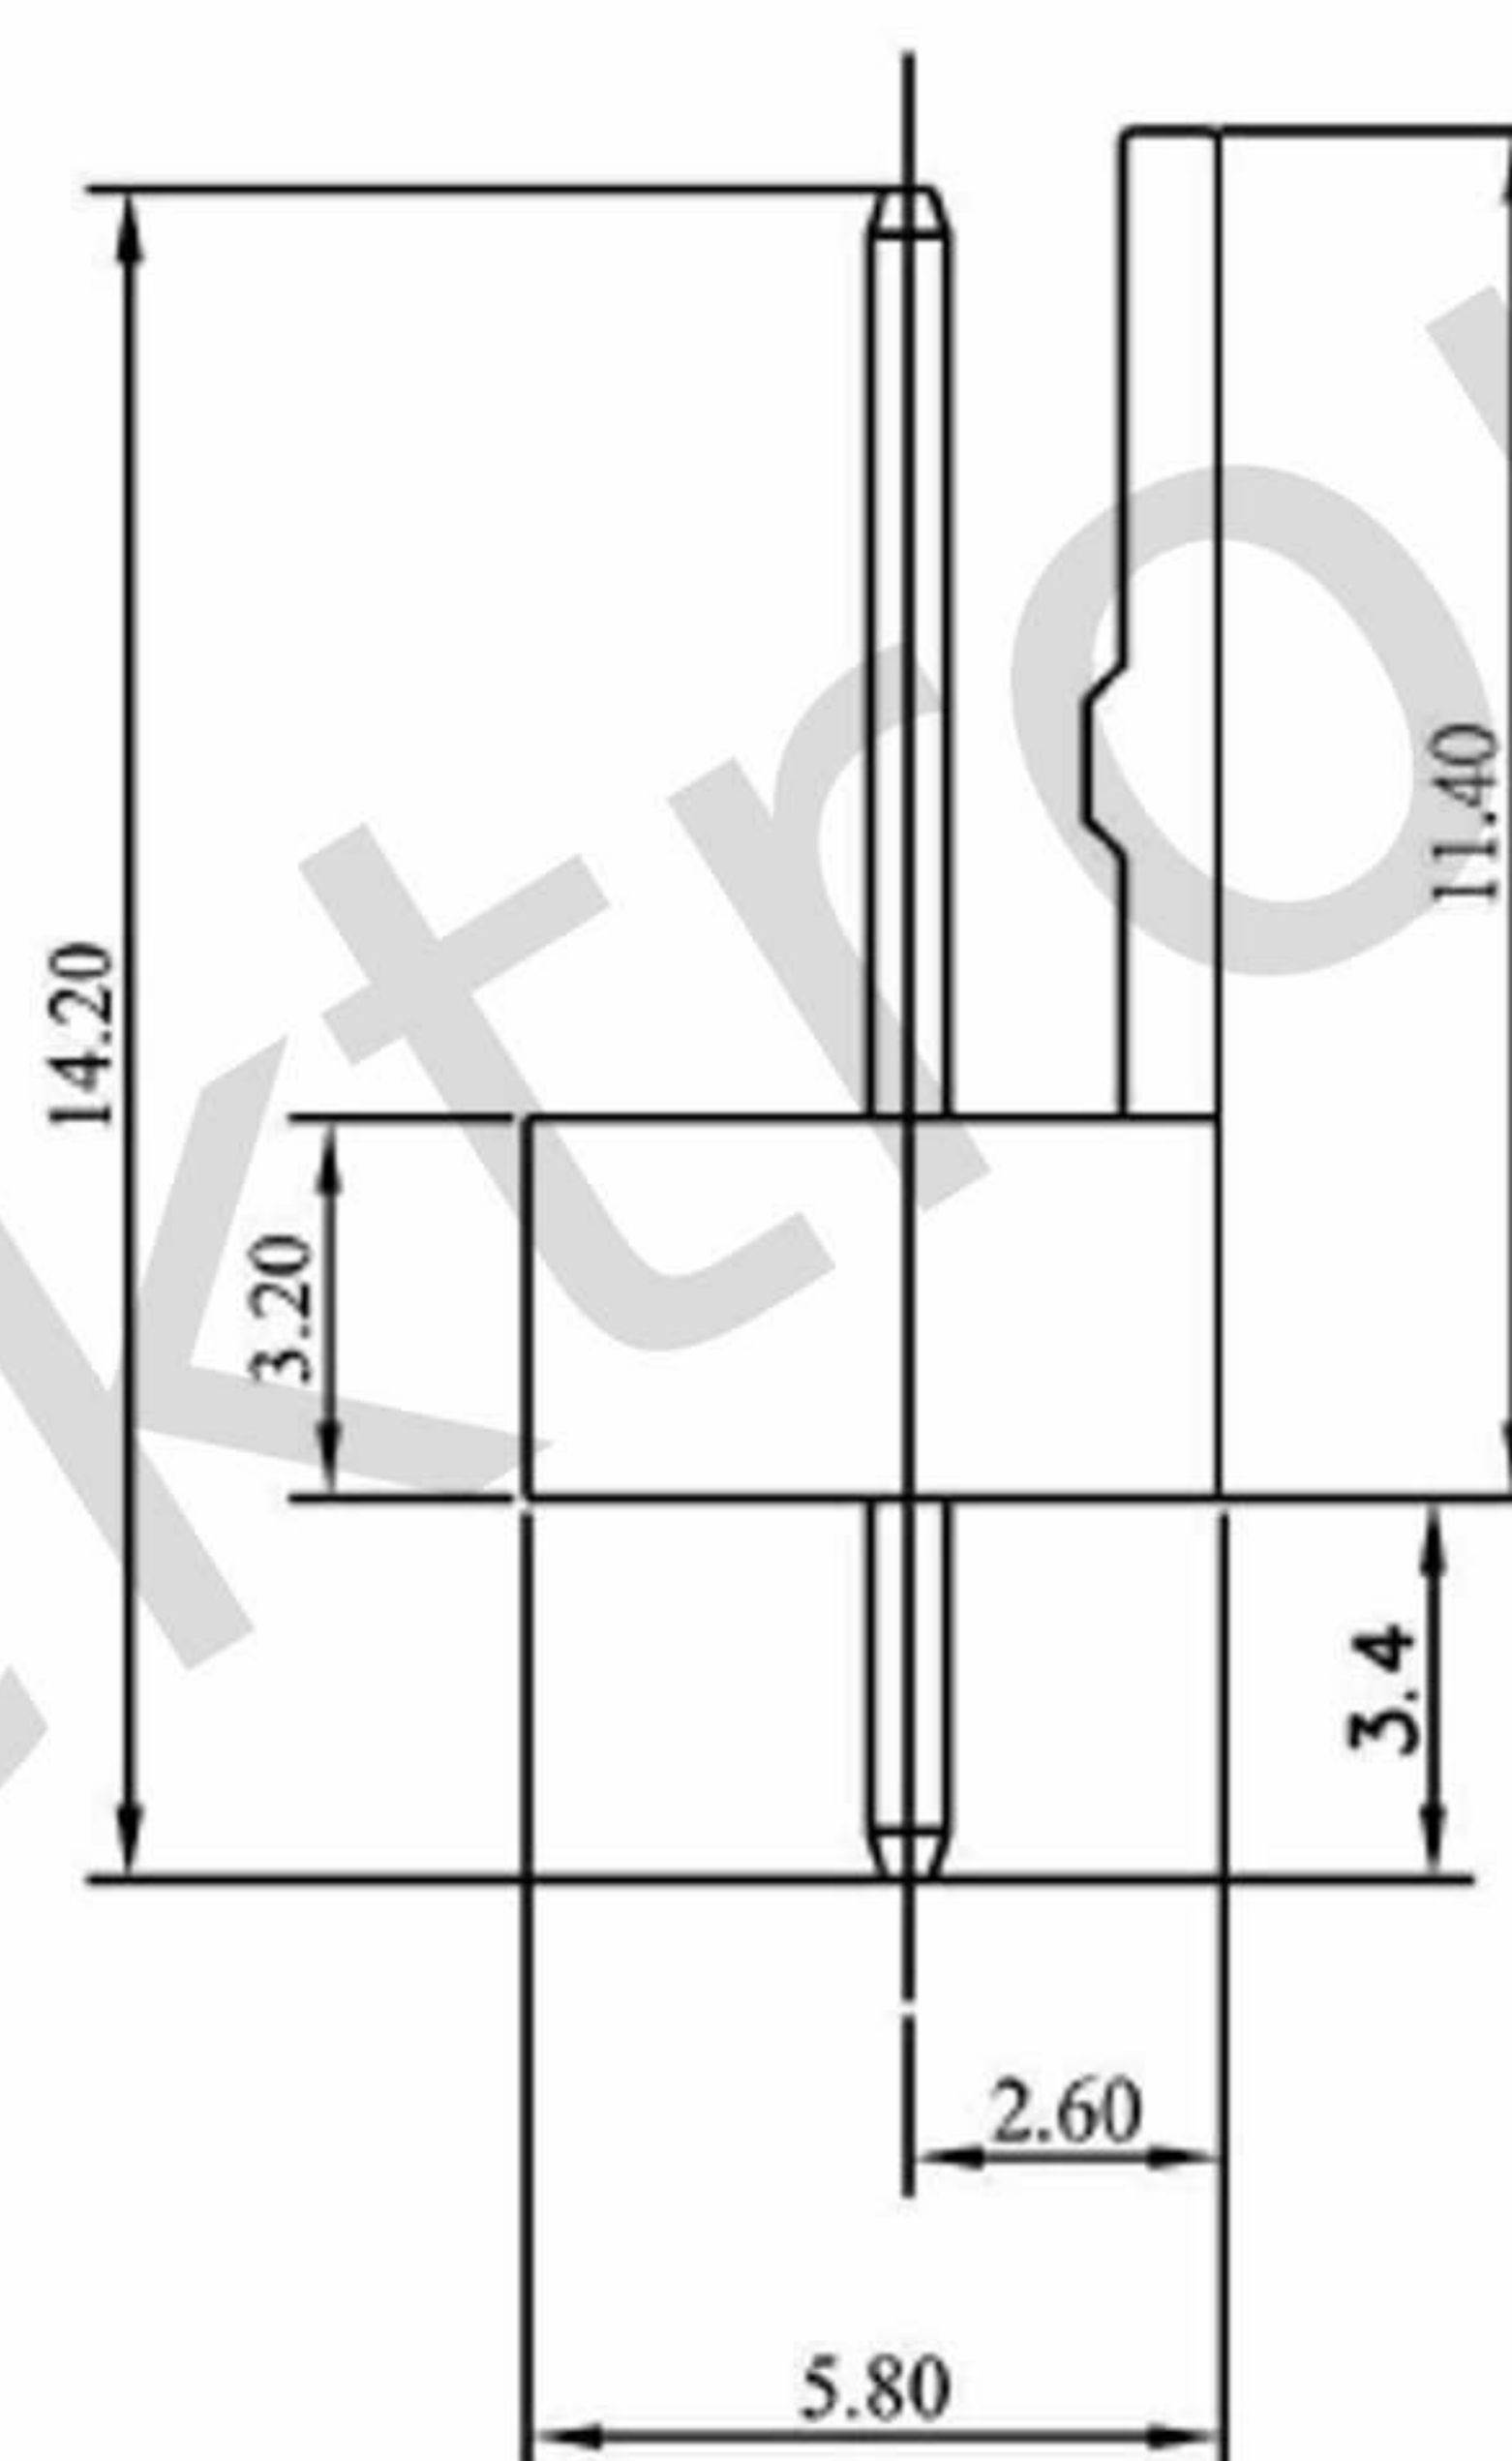


RECOMMENDED P.C. BOARD HOLE DIMM.

### Specifications

Current Rating: 2A AC, DC  
Voltage Rating: 250 AC Maximum  
Operating Temp: -25°C ~ + 85°C  
Contact Resistance: 10MΩ Max  
Insulation Resistance: 1000MΩ Min  
Terminal Material: Brass/ Tin-plated/ Gold-plated  
Material: Nylon 66, UL94V-2

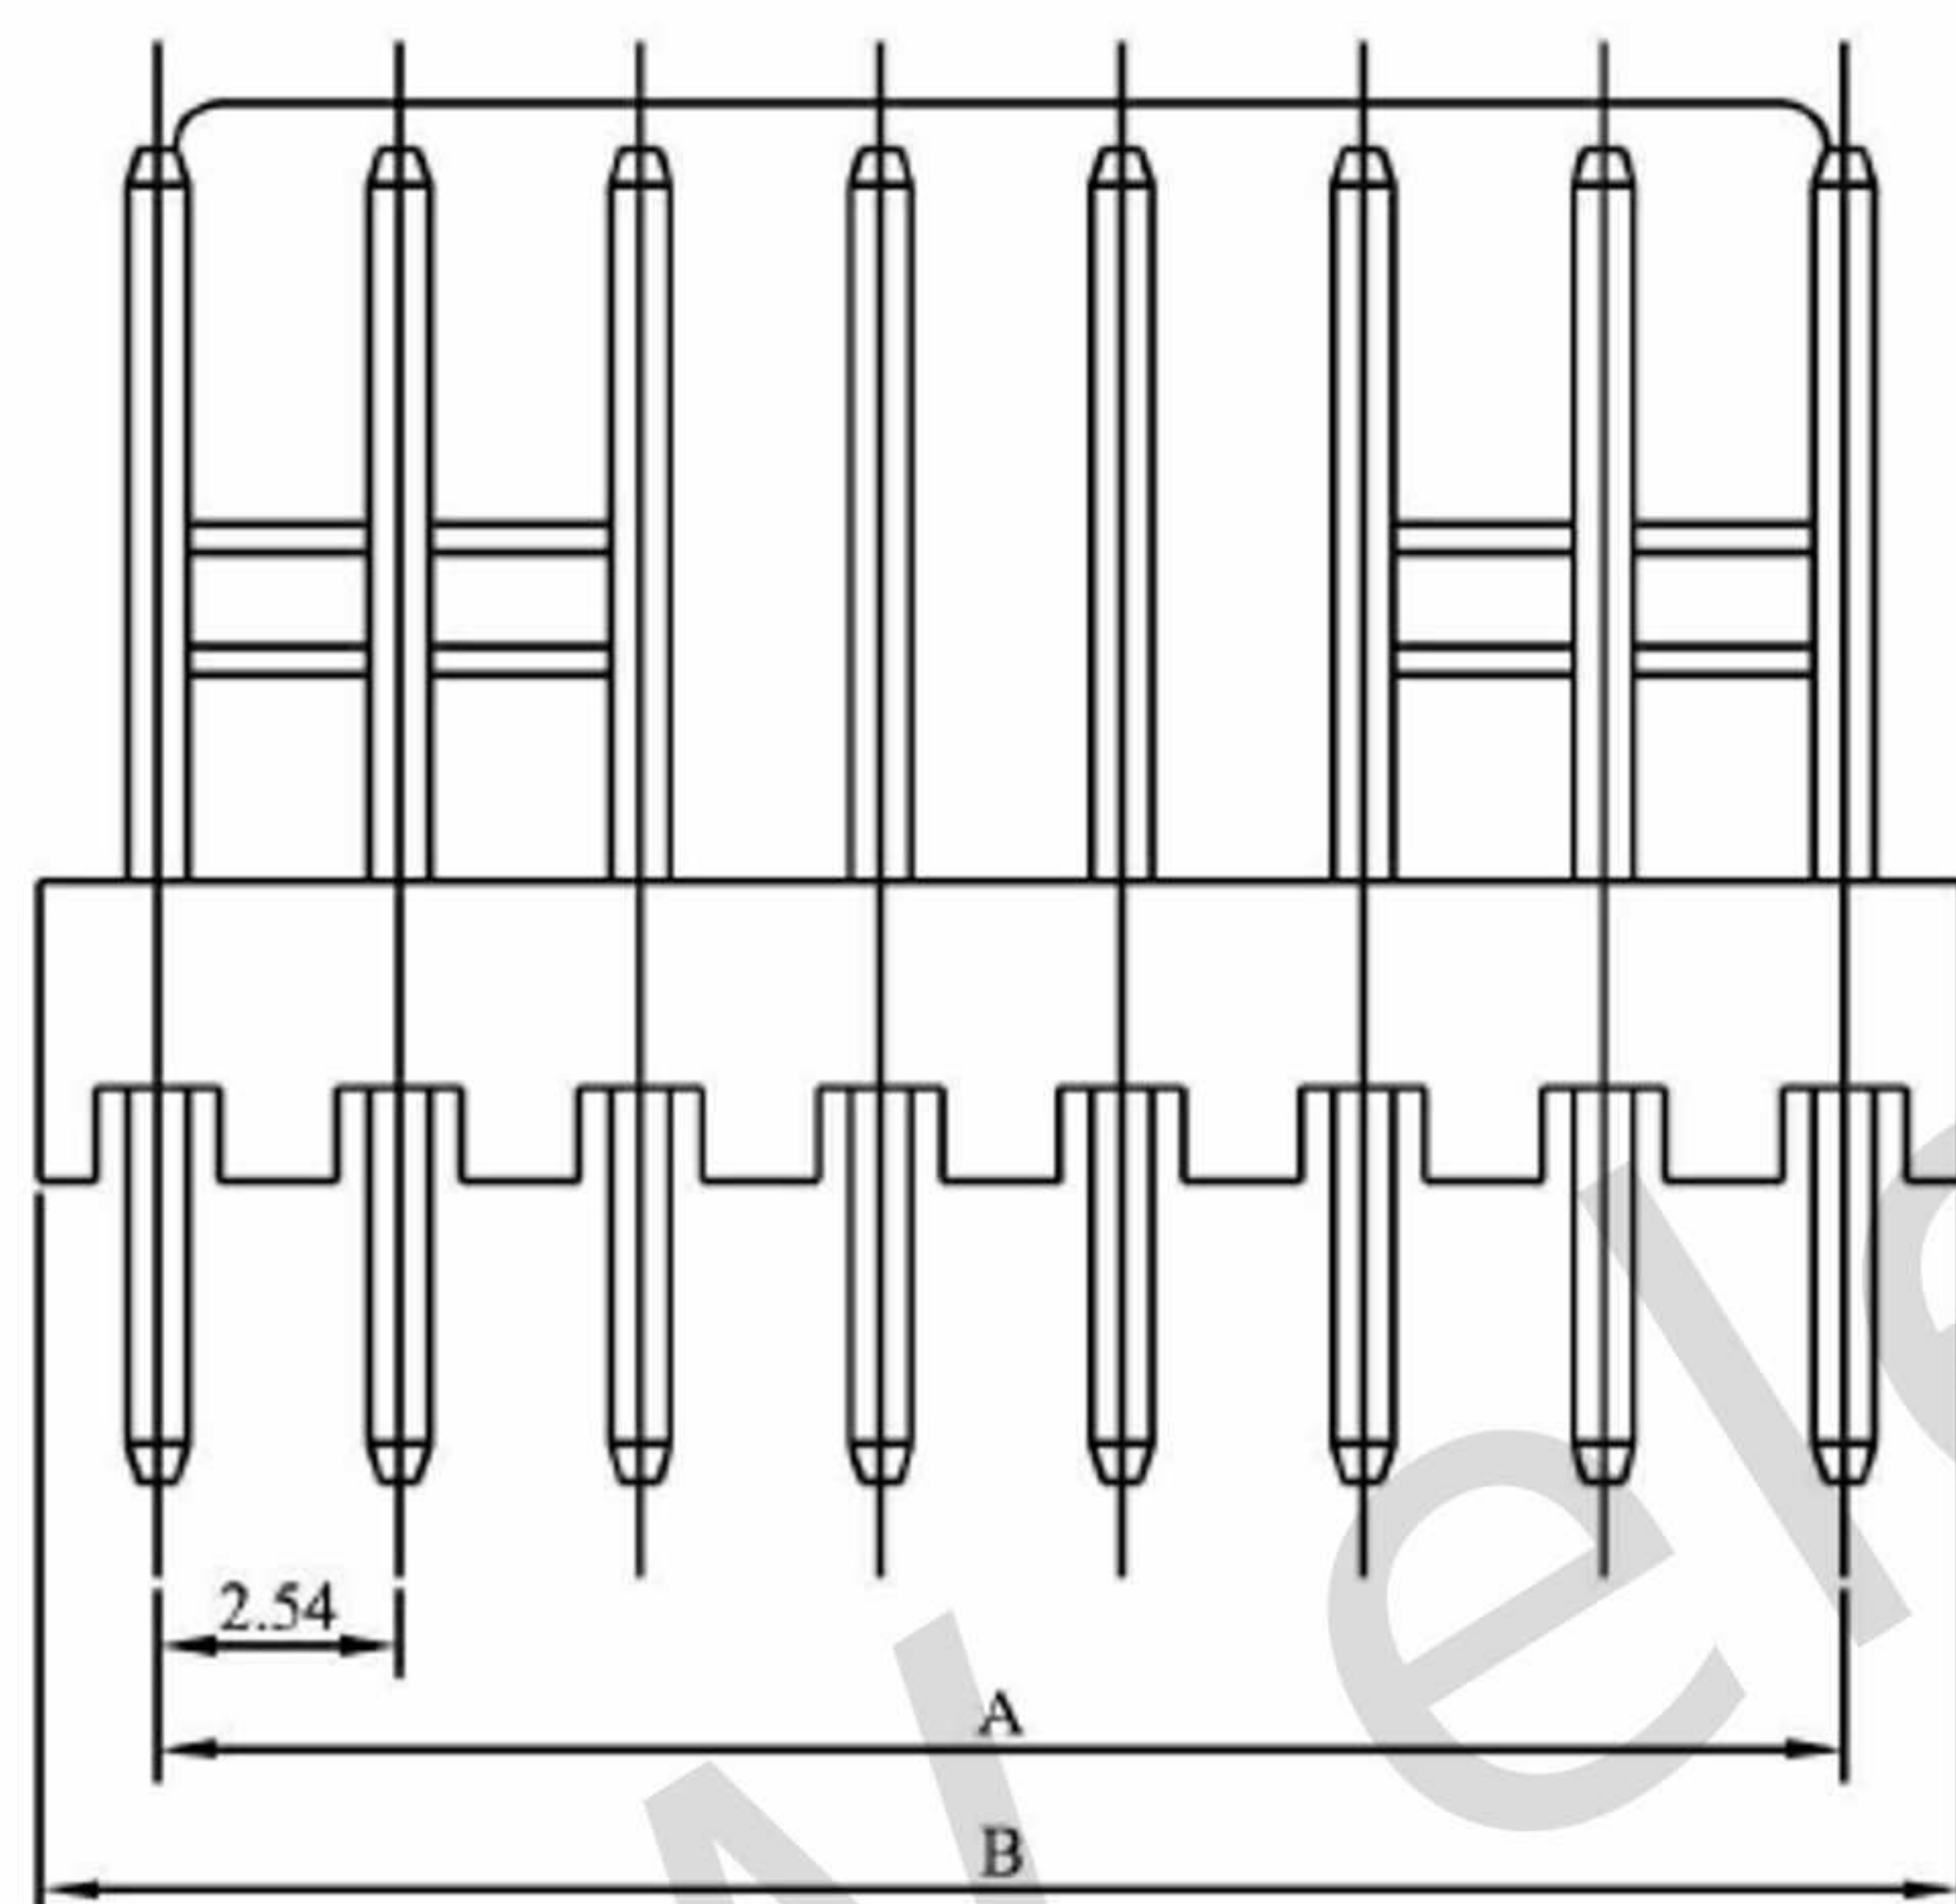

| Poles | Dimension mm (in.) |              |
|-------|--------------------|--------------|
|       | A                  | B            |
| 2     | 2.54(0.100)        | 5.12(0.202)  |
| 3     | 5.08(0.200)        | 7.66(0.302)  |
| 4     | 7.62(0.300)        | 10.20(0.402) |
| 5     | 10.16(0.400)       | 12.74(0.502) |
| 6     | 12.70(0.500)       | 15.30(0.602) |
| 7     | 15.24(0.600)       | 17.94(0.706) |
| 8     | 17.78(0.700)       | 20.48(0.806) |
| 9     | 20.32(0.800)       | 23.02(0.906) |
| 10    | 22.86(0.900)       | 25.58(1.007) |
| 11    | 25.40(1.000)       | 28.12(1.107) |
| 12    | 27.94(1.100)       | 30.68(1.208) |
| 13    | 30.48(1.200)       | 33.10(1.303) |
| 14    | 33.02(1.300)       | 35.80(1.409) |
| 15    | 35.56(1.400)       | 38.34(1.509) |
| 16    | 38.10(1.500)       | 40.94(1.612) |
| 17    | 40.64(1.600)       | 43.30(1.705) |
| 18    | 43.18(1.700)       | 45.90(1.807) |
| 19    | 45.72(1.800)       | 48.56(1.912) |
| 20    | 48.26(1.900)       | 50.80(2.000) |

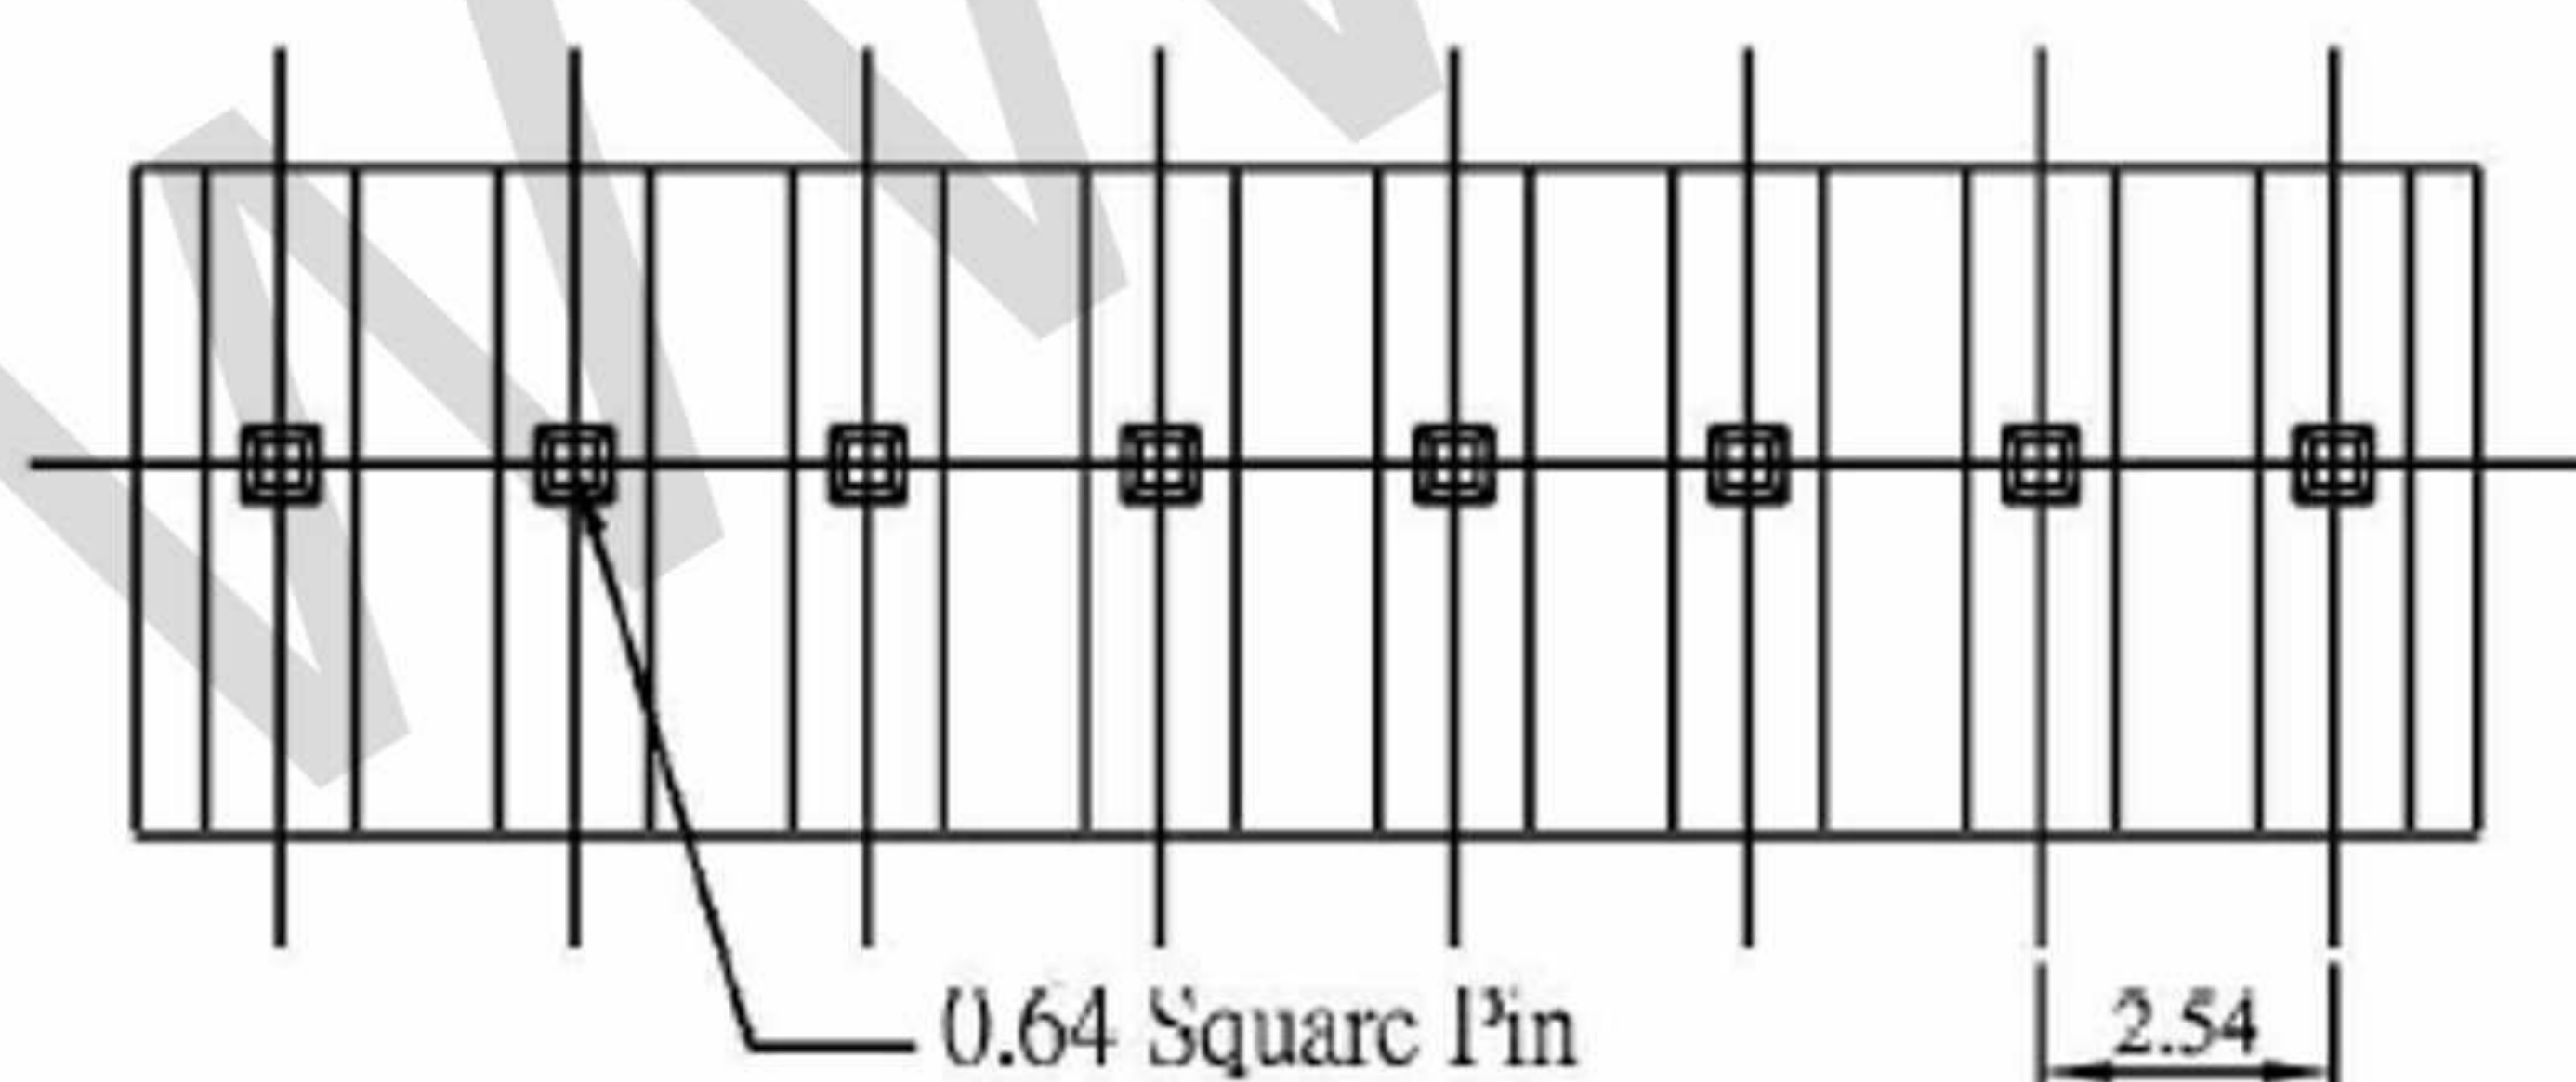

|                                                                                       |                                                                      |                                                                                                                            |
|---------------------------------------------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Oznaczenie                                                                            | JS-6001                                                              |                                                                                                                            |
| Opis                                                                                  | Wafer straight type 2,54mm                                           |                                                                                                                            |
|  | <b>WW elektronik s.c.</b><br>ul. Kraszewskiego 26<br>81-815 Sopot    | Tel. 058 551-11-15<br>fax. 058 550-45-17<br>e-mail: <a href="mailto:info@wwelektronik.com.pl">info@wwelektronik.com.pl</a> |
|                                                                                       | <a href="http://www.wwelektronik.com.pl">www.wwelektronik.com.pl</a> |                                                                                                                            |