
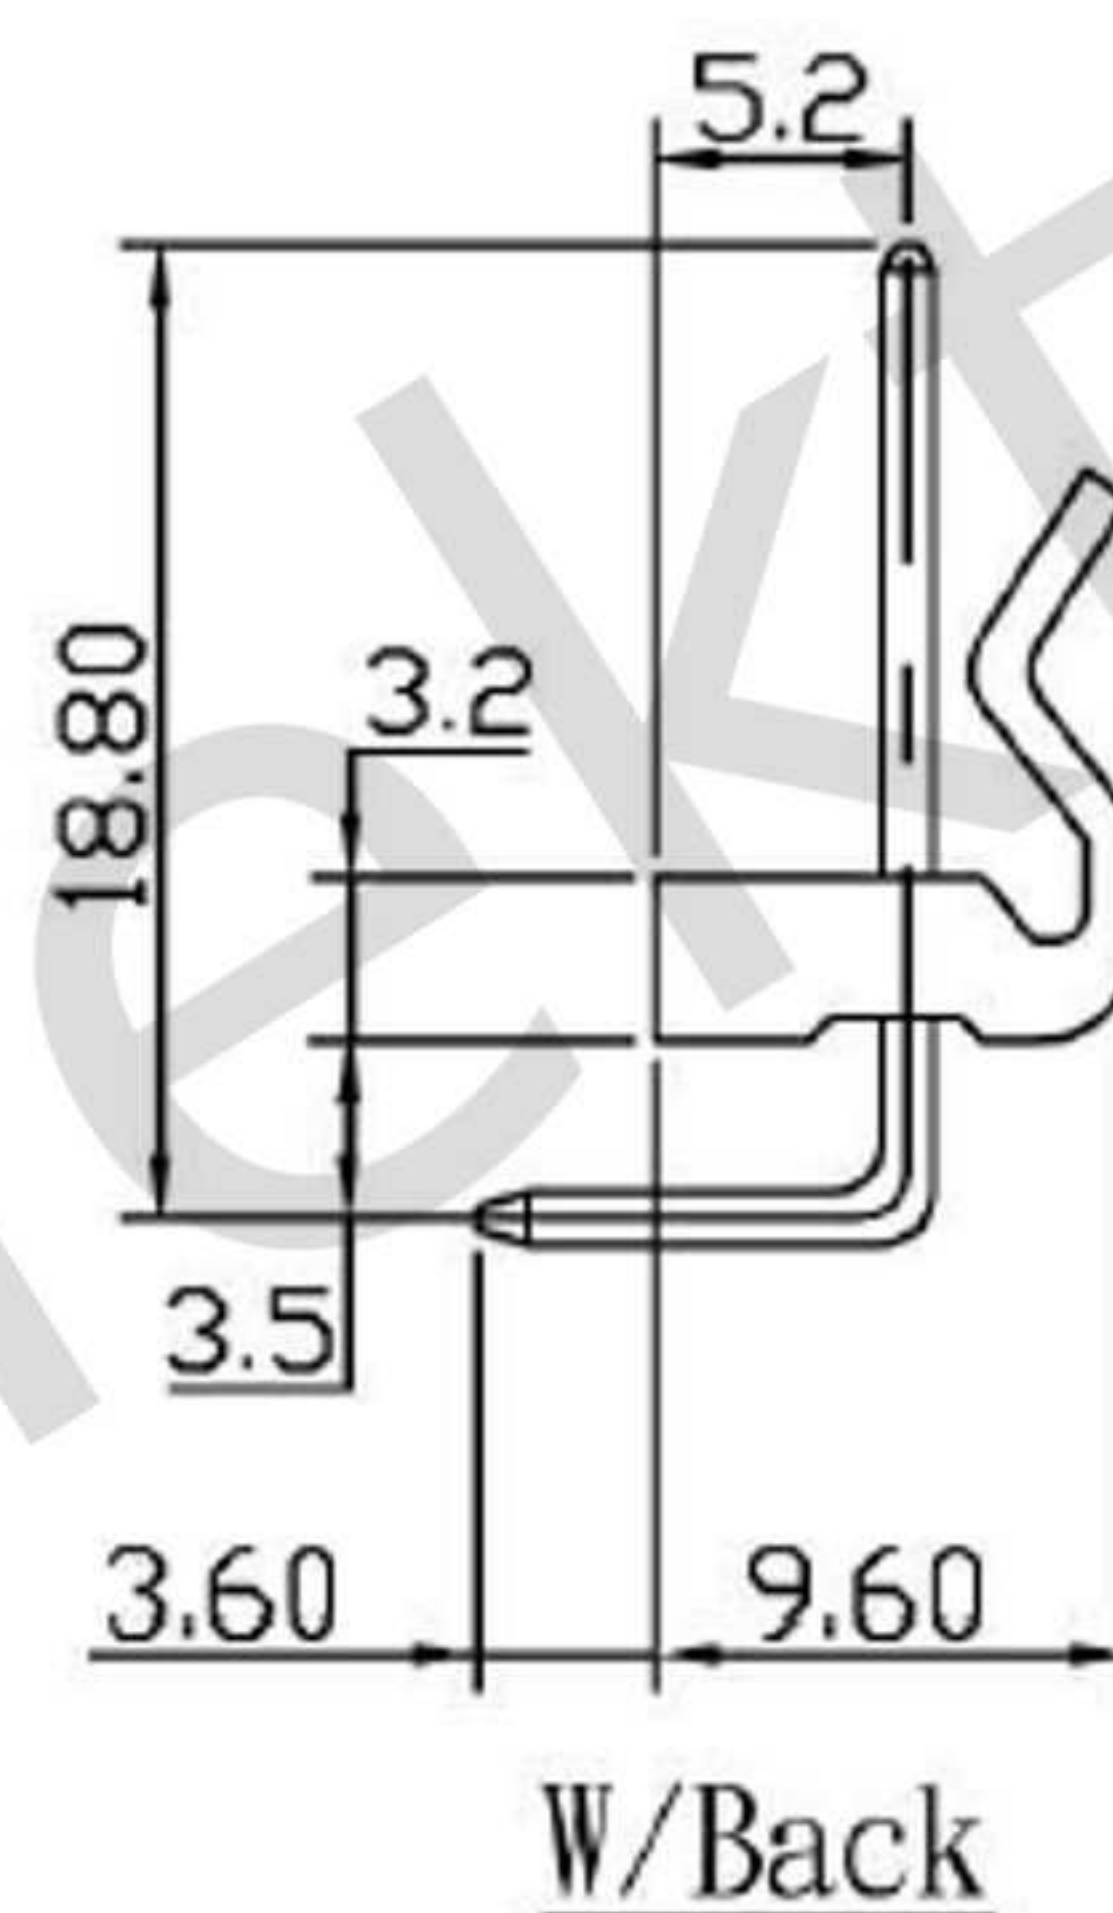
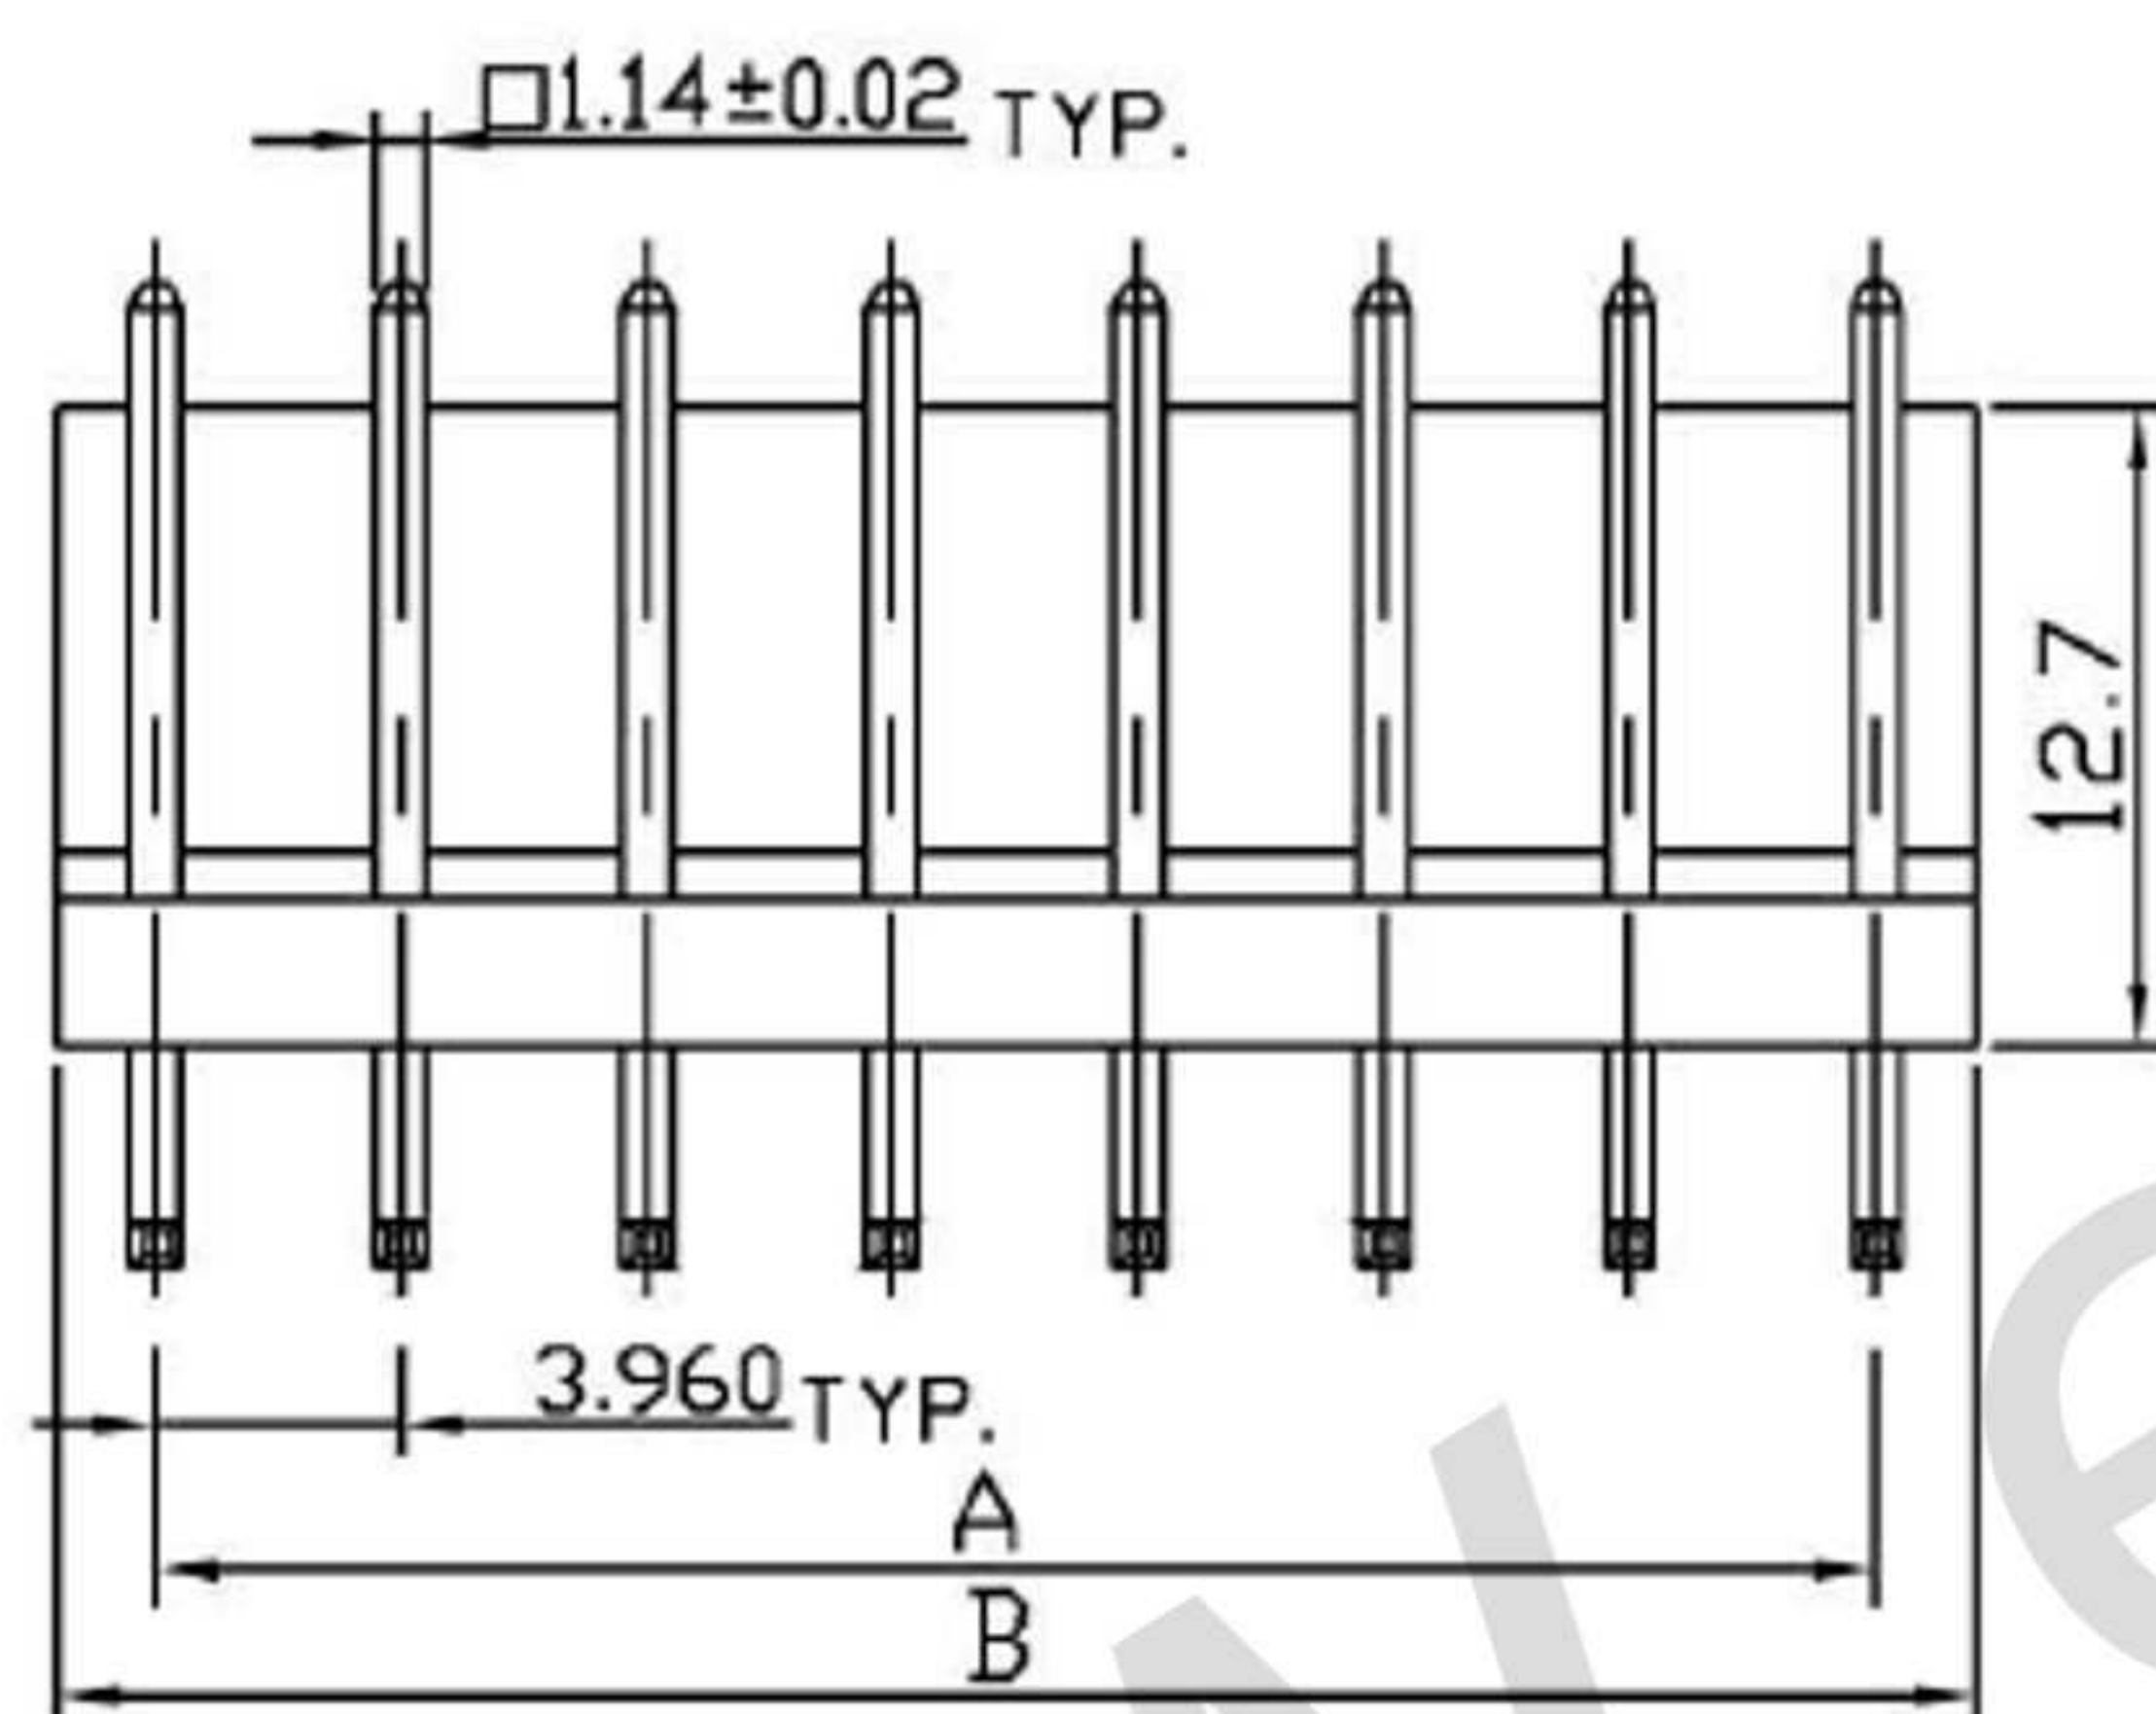
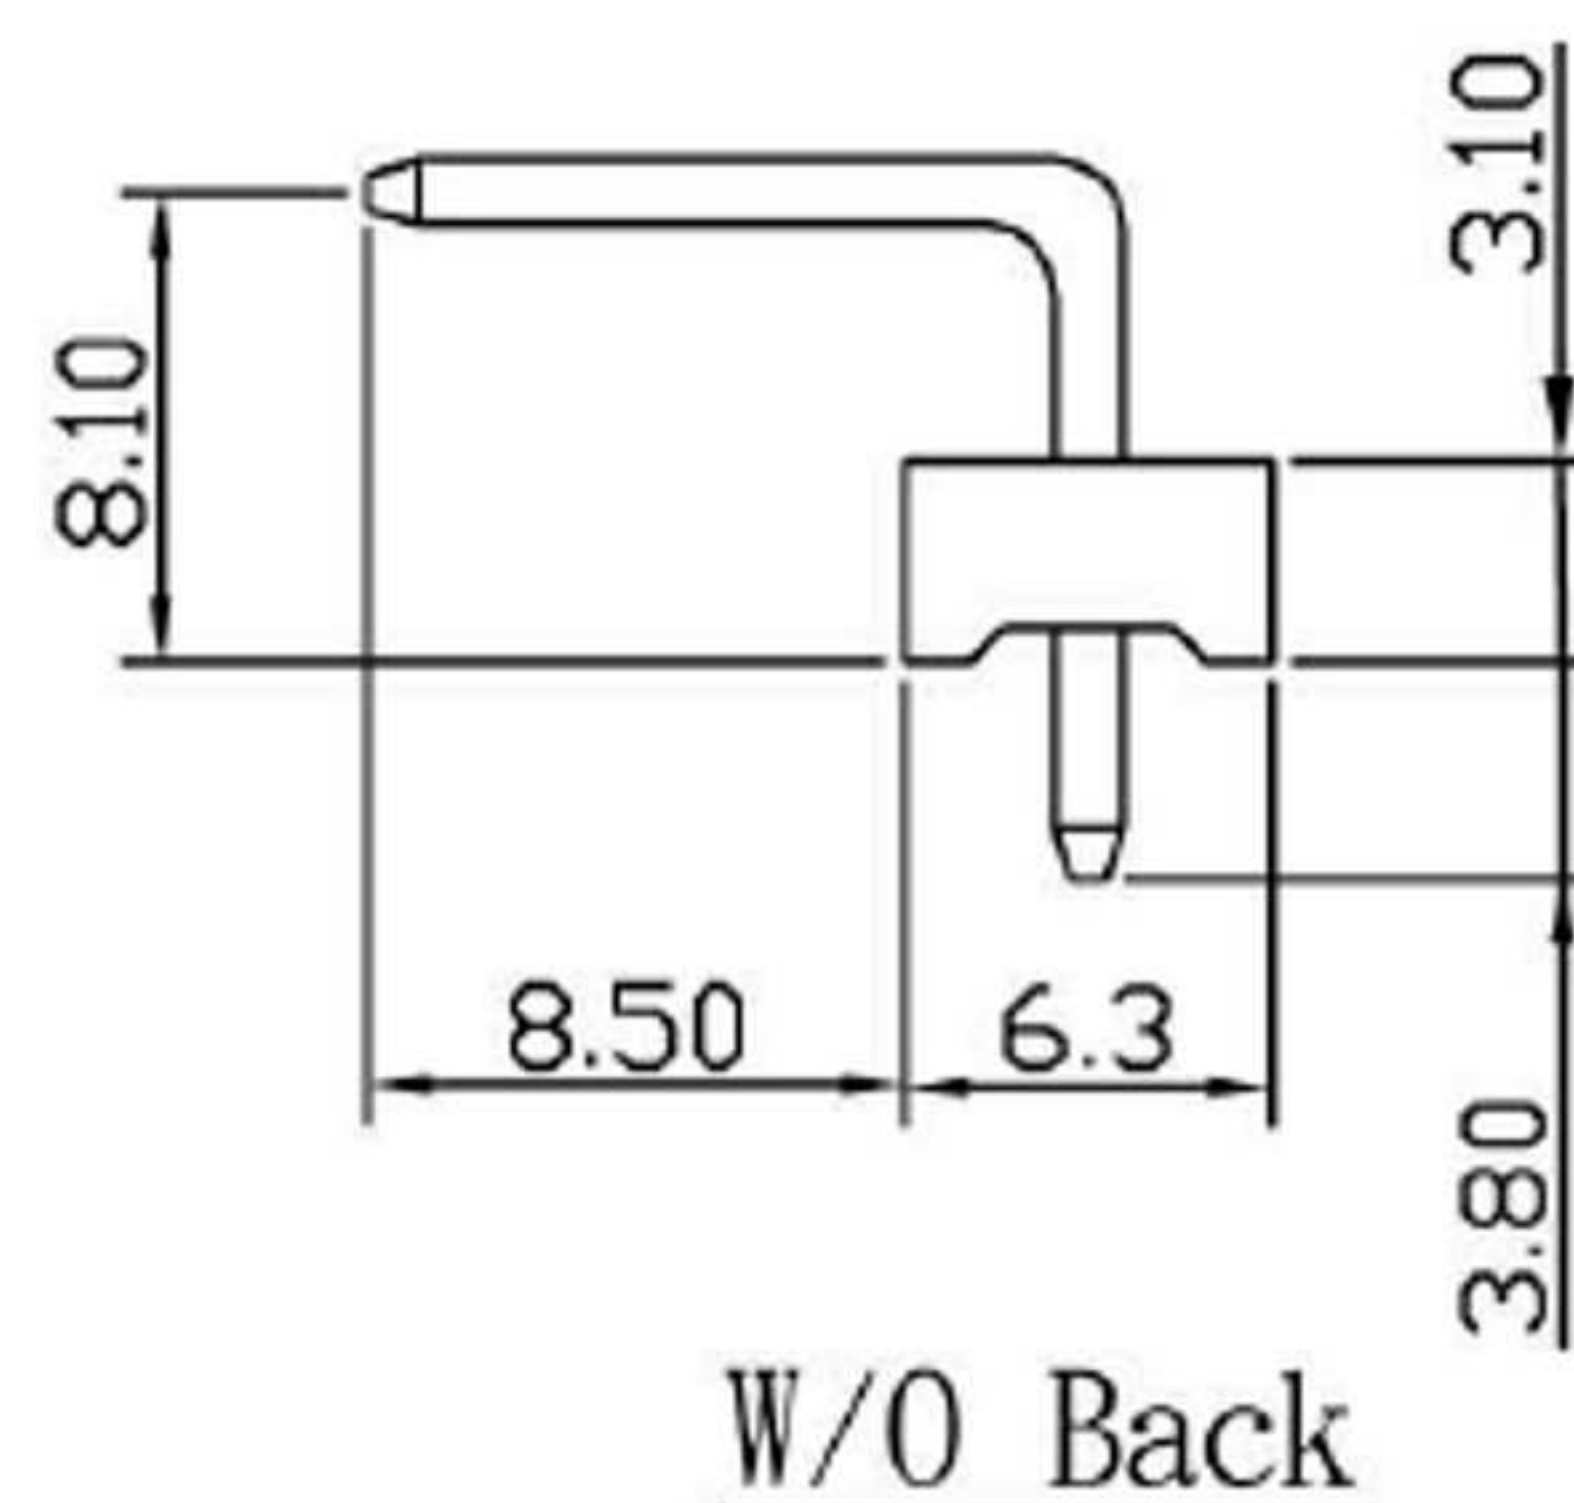


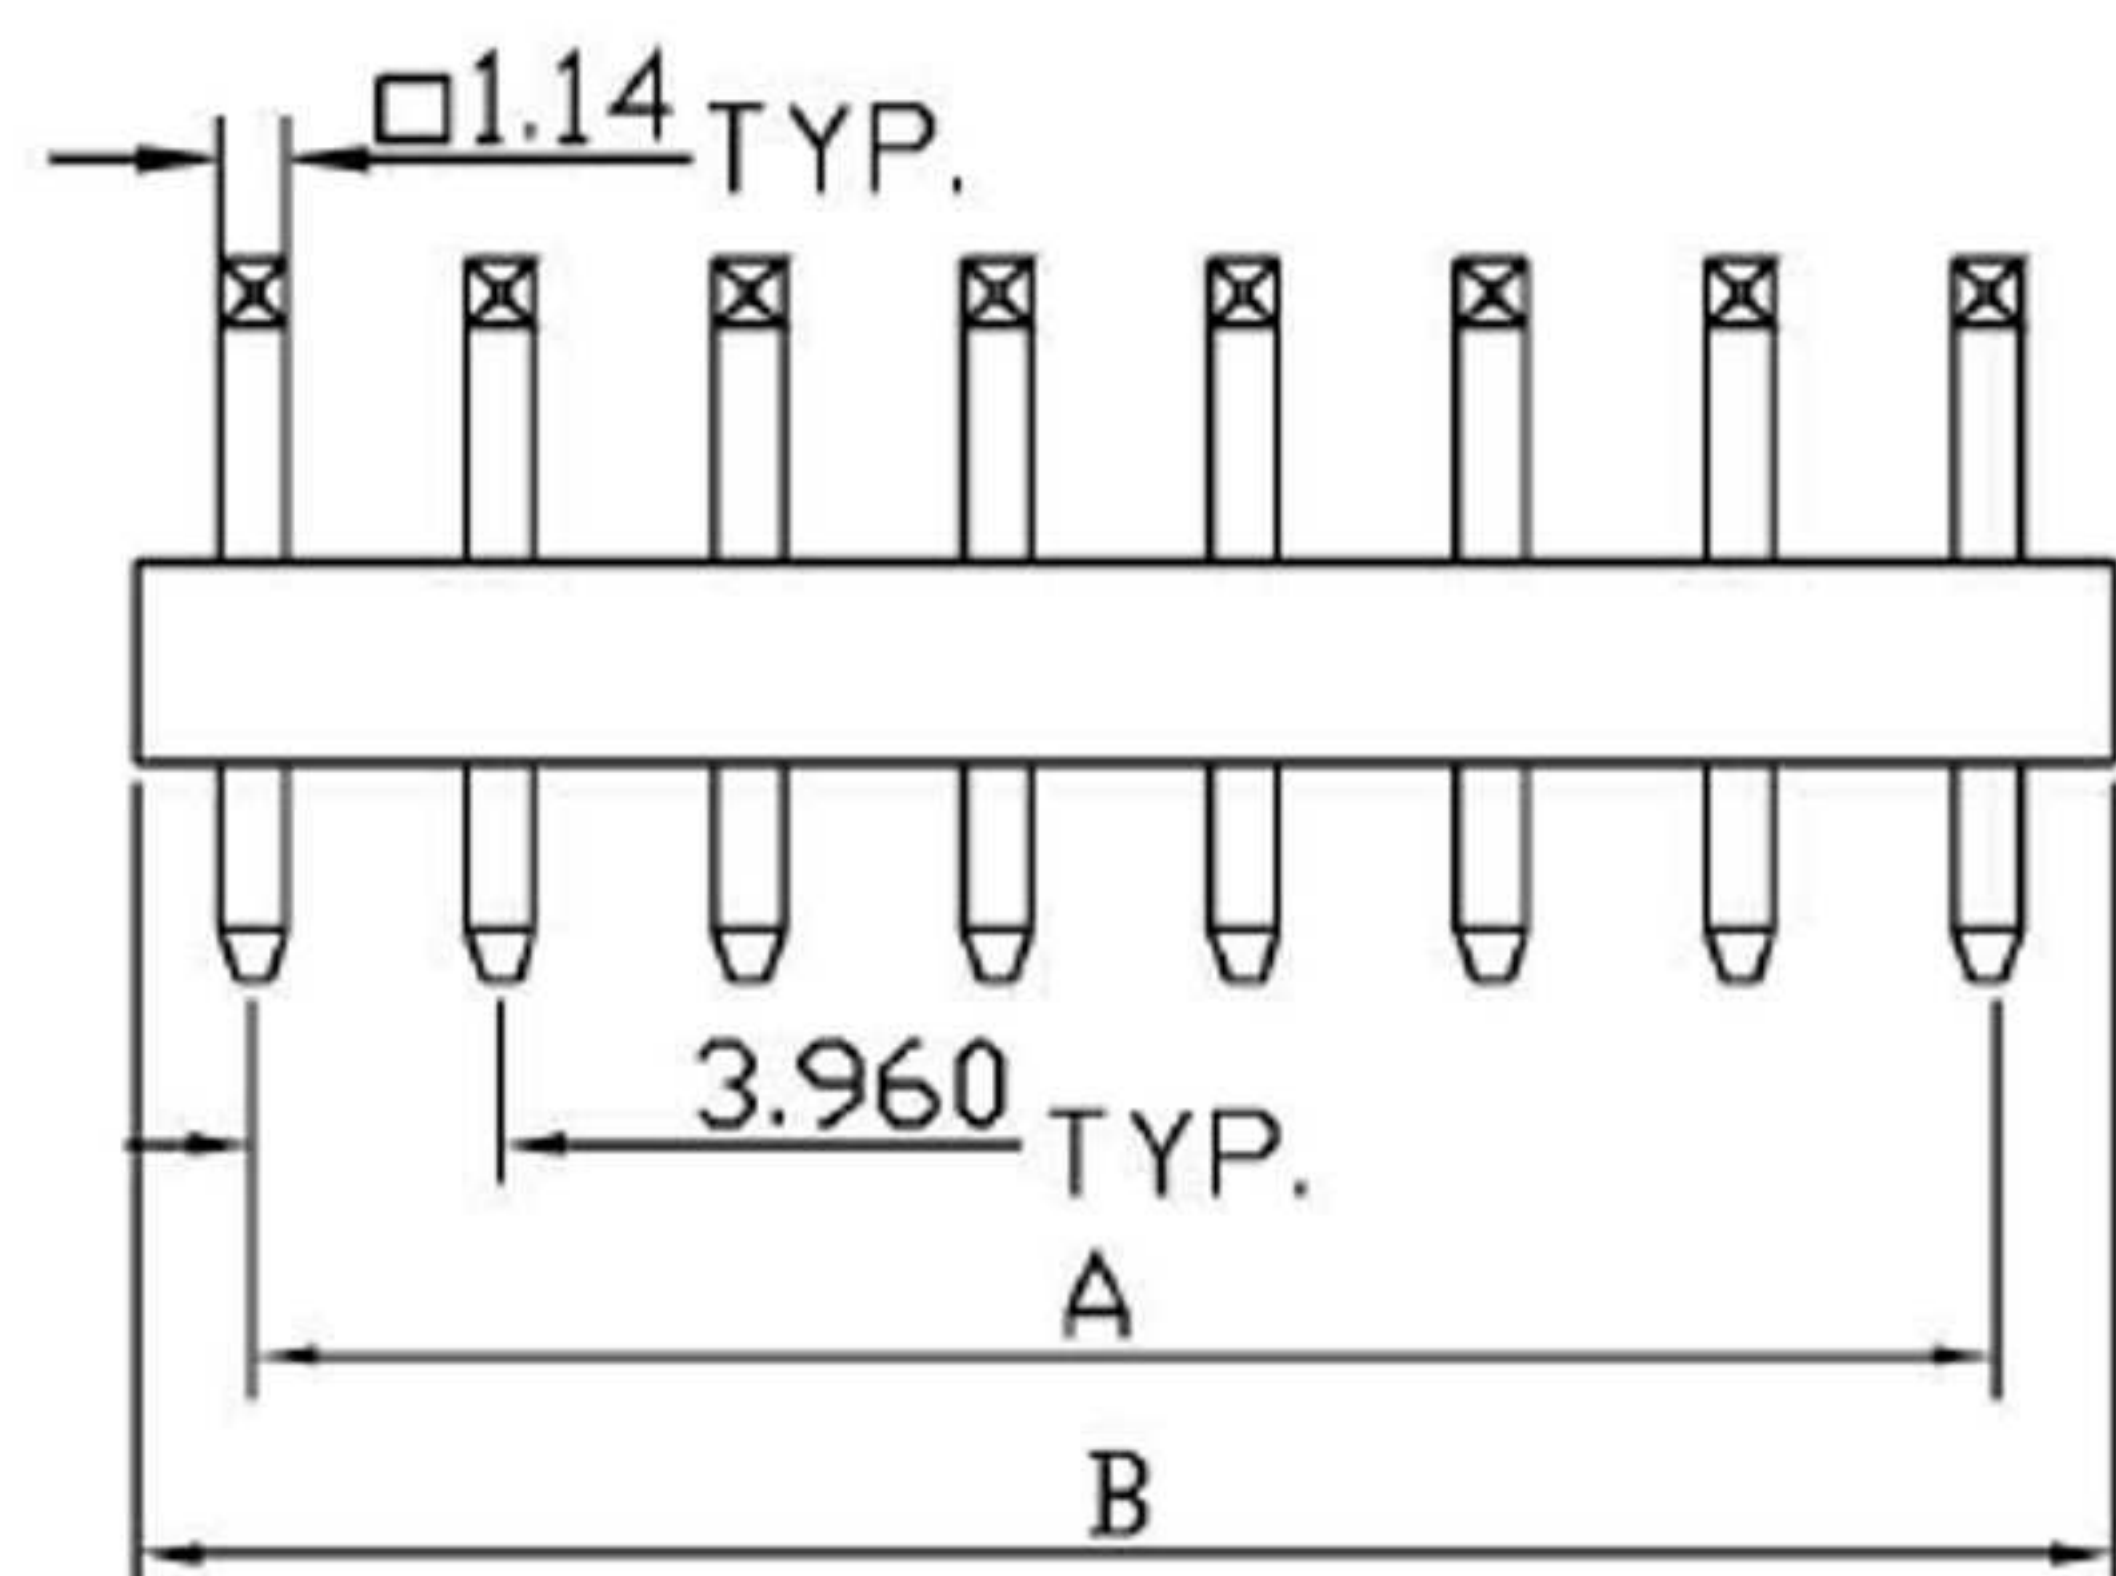

SPECIFICATION

Voltage Rating: 250V AC/DC

Current Rating: 5A AC/DC

Temperature Range: -25 ° C ~+85 ° C

Contact Resistance: 10 Milliohms Max.

Insulation Resistance: 1,000 Megohms Min.

Dielectric Withstanding Voltage: 1,500V AC/DC/Minute.

Material: Nylon 66, UL94V-2

Color: White

Pin: Brass, Tin Plated

Poles	Dimension		Poles	Dimension	
	A	B		A	B
2	3.96	8.00	11	39.60	43.90
3	7.92	12.00	12	43.56	47.80
4	11.88	15.90	13	47.52	51.80
5	15.84	20.00	14	51.48	55.70
6	19.80	24.00	15	55.44	59.80
7	23.76	27.90	16	59.40	63.80
8	27.72	31.90	17	63.36	67.70
9	31.86	35.80	18	67.32	71.70
10	35.64	39.90	19	71.28	75.60
			20	75.24	79.80

Oznaczenie	JS-4001R		
Opis	Wafer R/A type 3,96mm		
	WW elektronik s.c. ul. Kraszewskiego 26 81-815 Sopot		Tel. 058 551-11-15 fax. 058 550-45-17 e-mail: info@wwelektronik.com.pl
	www.wwelektronik.com.pl		