

MATERIAL: BRASS

THICKNESS: 0.25

HARDNESS: SH

PLATING: TIN 40 μ m MIN

WIRE RANGE: (AWG) 18-24

INSULATION O.D.: 1.57 MAX.

FIRST INSERTION FORCE: 0.68KG MAX. PER CIRCUIT

SIXTH WITHDRAWAL FORCE: 0.113KG MIN. PER CIRCUIT

RATED VOLTAGE: AC/250V, DC/350V

RATED CURRENT: AC, DC, 3A

TEMPERATURE RANGE: -25°C TO +85°C

1. ELECTRICAL RATING: 5A, 250V

2. PULL FORCE: 18AWG = 20lbf
20-24AWG = 8lbf

DIMENSION: (MM)

T: 0.25 $\pm$ 0.03

L: 13.7 $\pm$ 0.3

E: 0.85 $\pm$ 0.25

W: 1.8 $\pm$ 0.15

W1: 2.7 $\pm$ 0.15

IS: 3.5 $\pm$ 0.25



WS: 2.6 $\pm$ 0.25

H: 3.5 $\pm$ 0.25


H1: 2.6 $\pm$ 0.25

H2: 4.5 $\pm$ 0.3

t: 1.0 $^{+0.25}_{-0}$

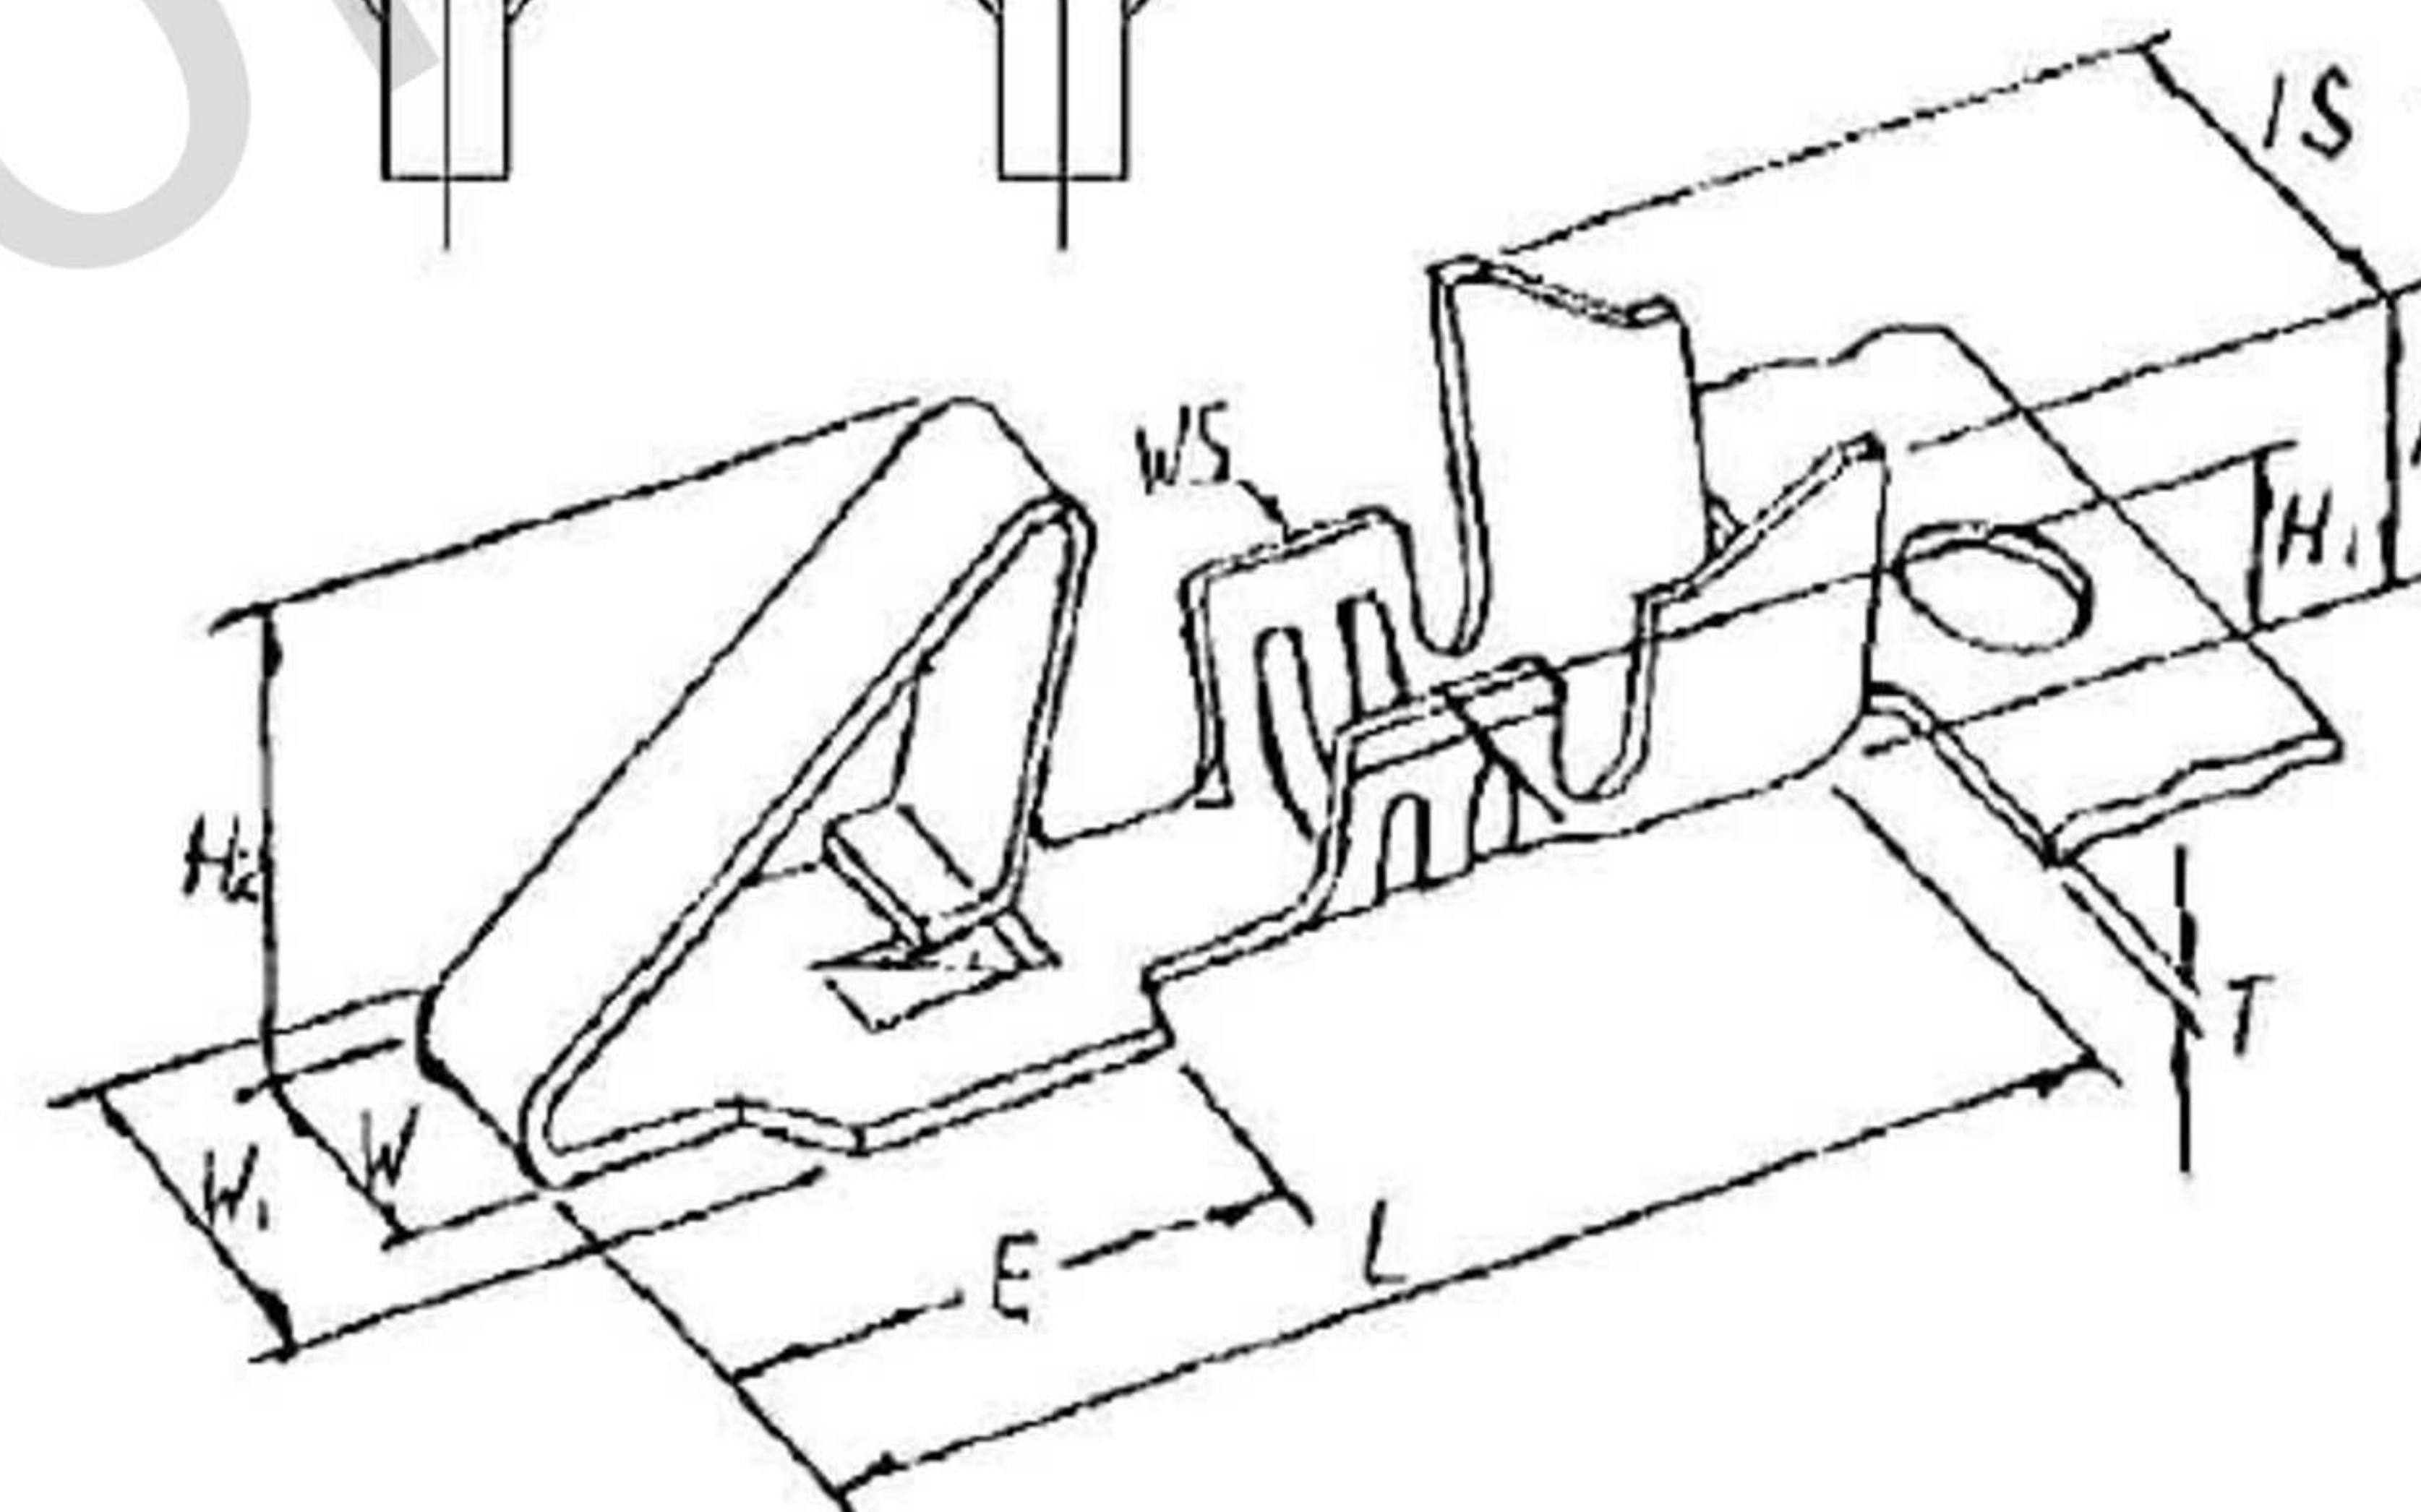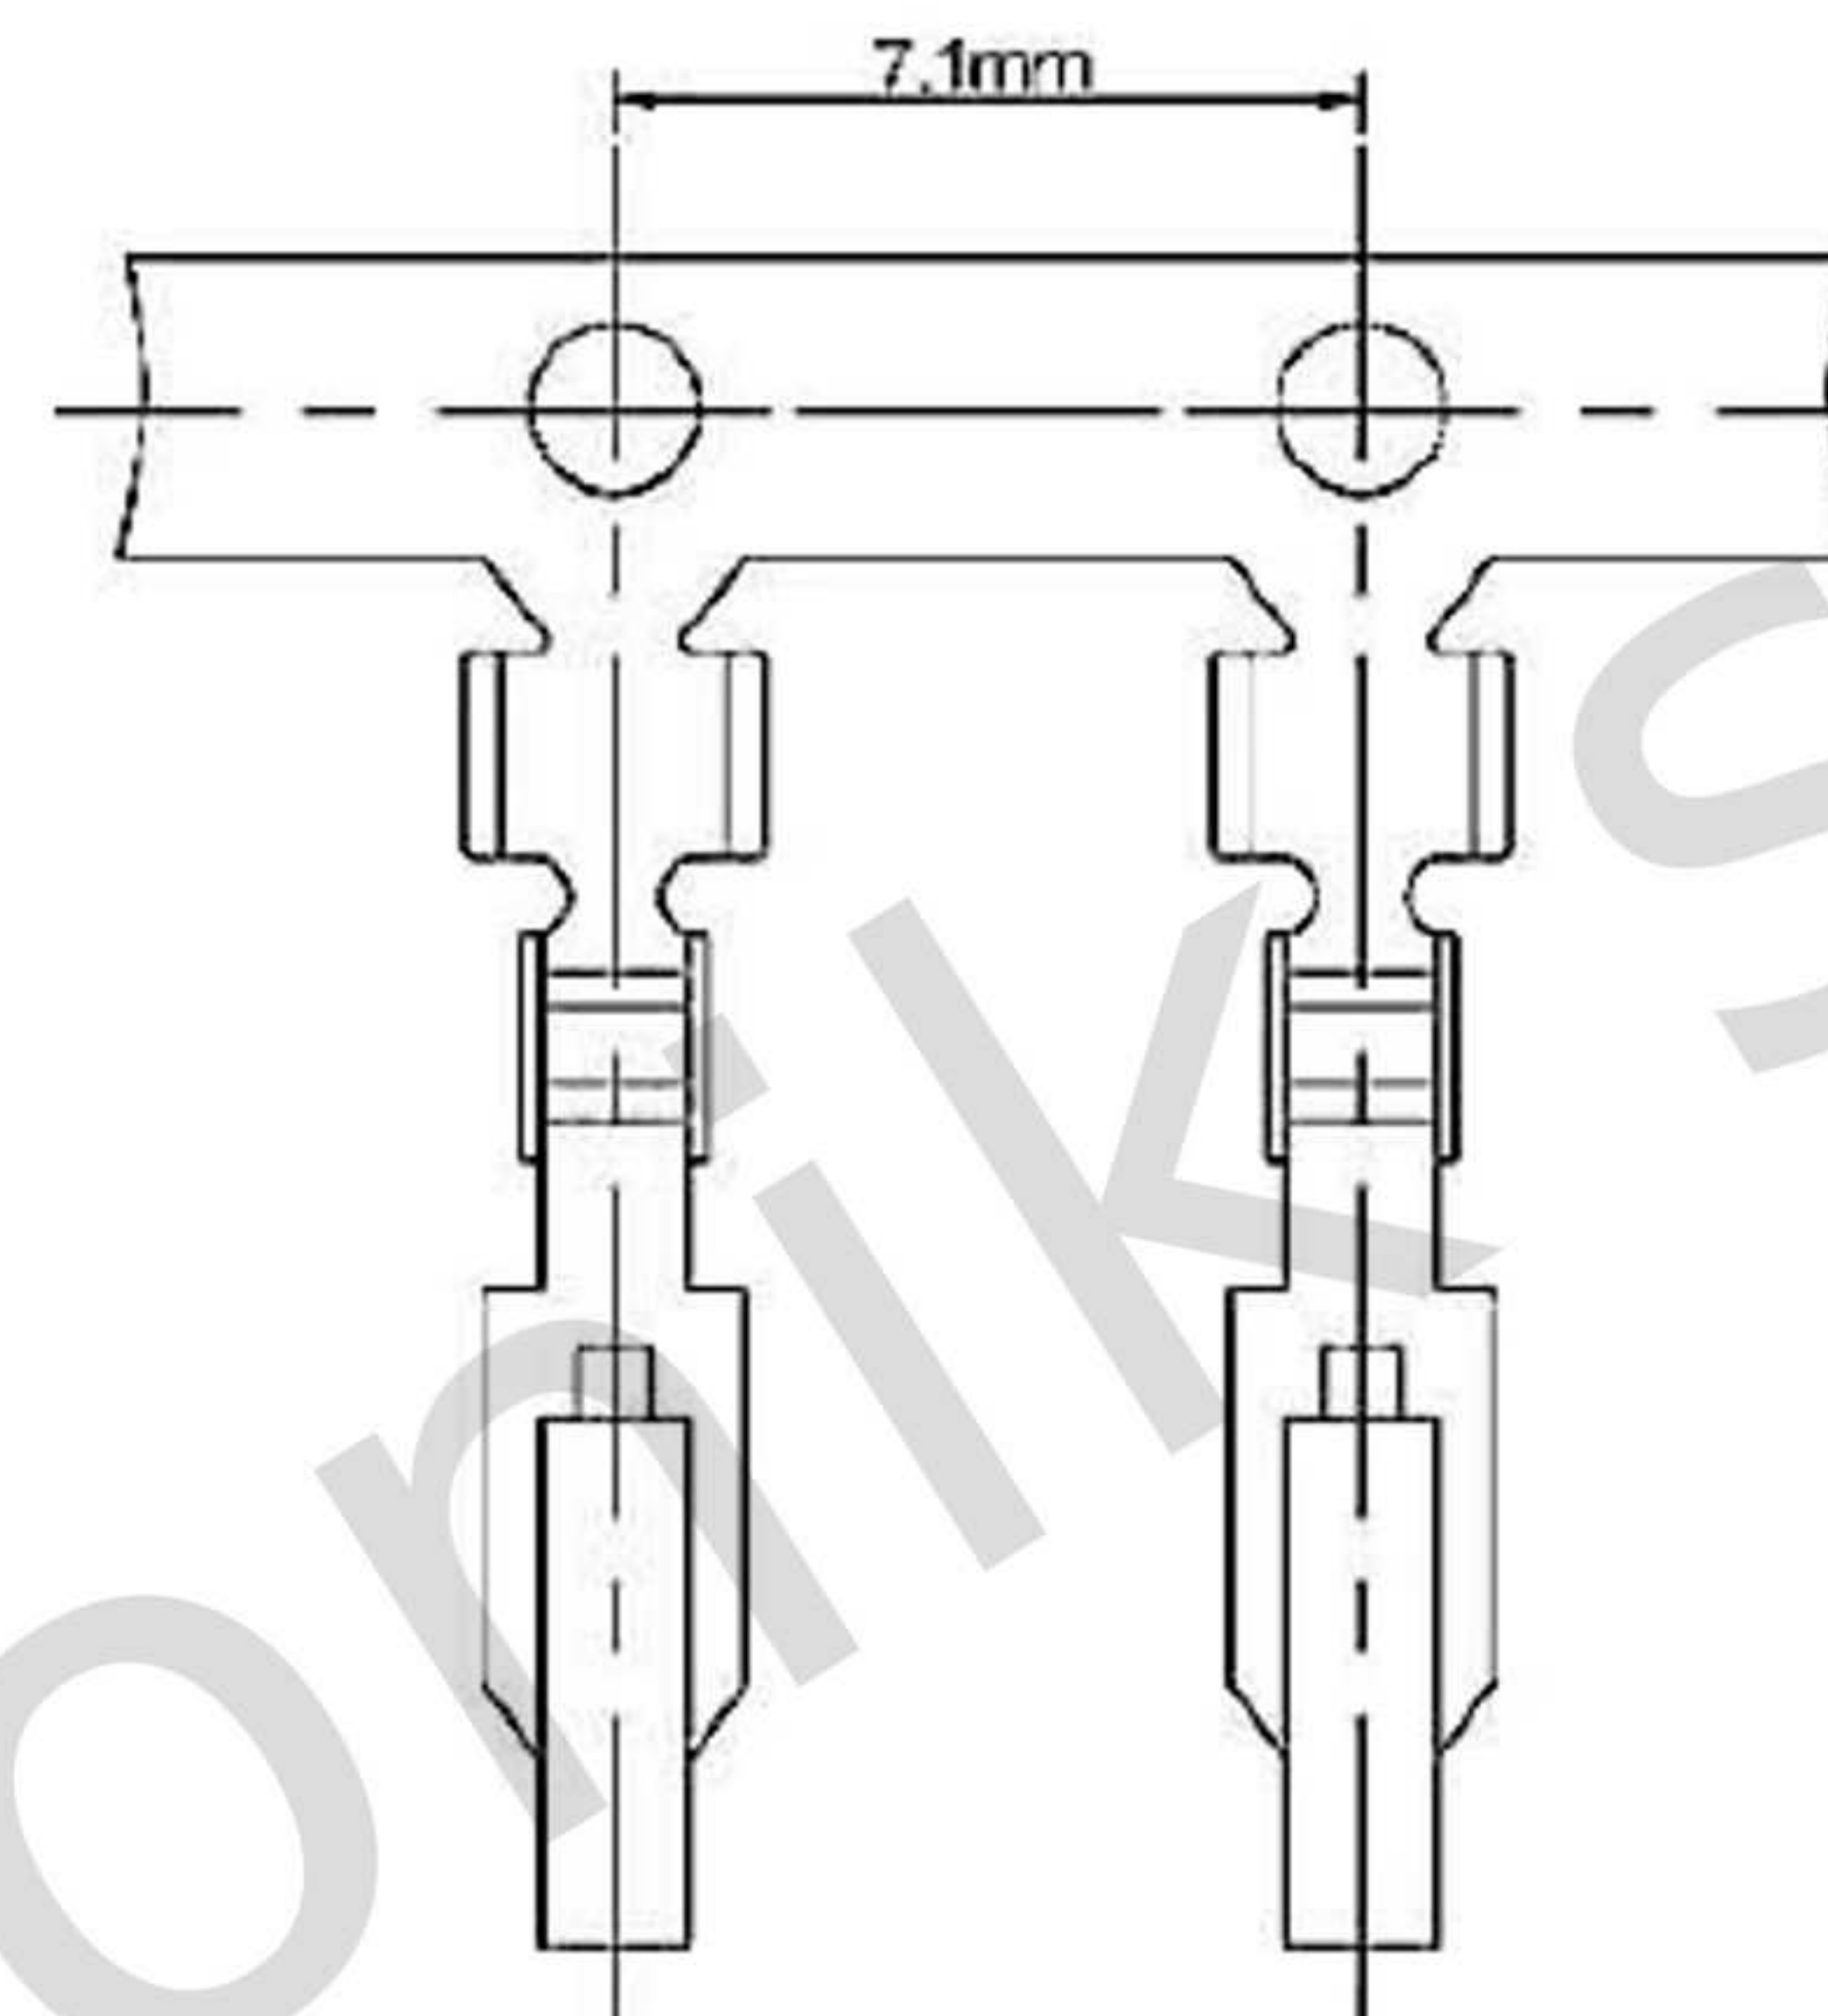

RoHS Compliant

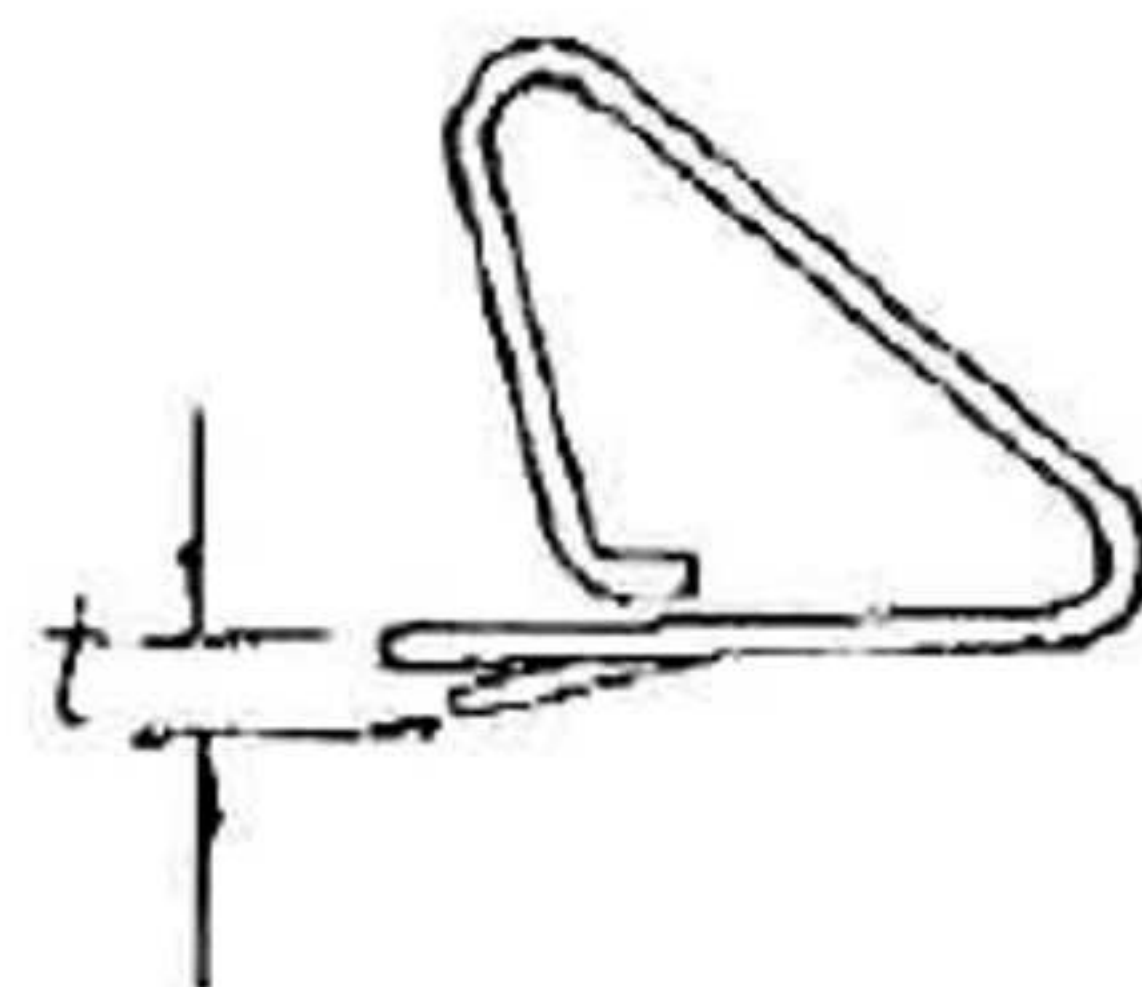

Oznaczenie	JS-5001-T	
Opis	JS-5001-T terminal - RoHS	
	WW elektronik s.c. ul. Kraszewskiego 26 81-815 Sopot	Tel. 058 551-11-15 fax. 058 550-45-17 e-mail: info@wwelektronik.com.pl
	www.wwelektronik.com.pl	