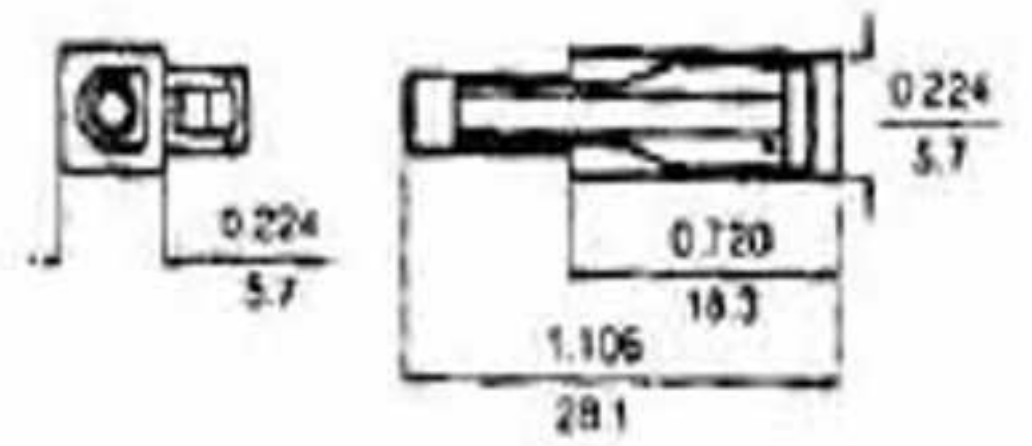
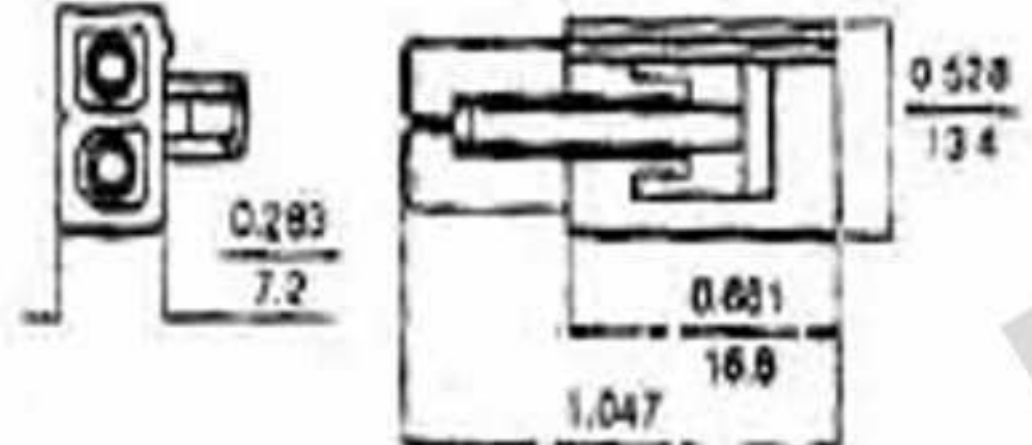
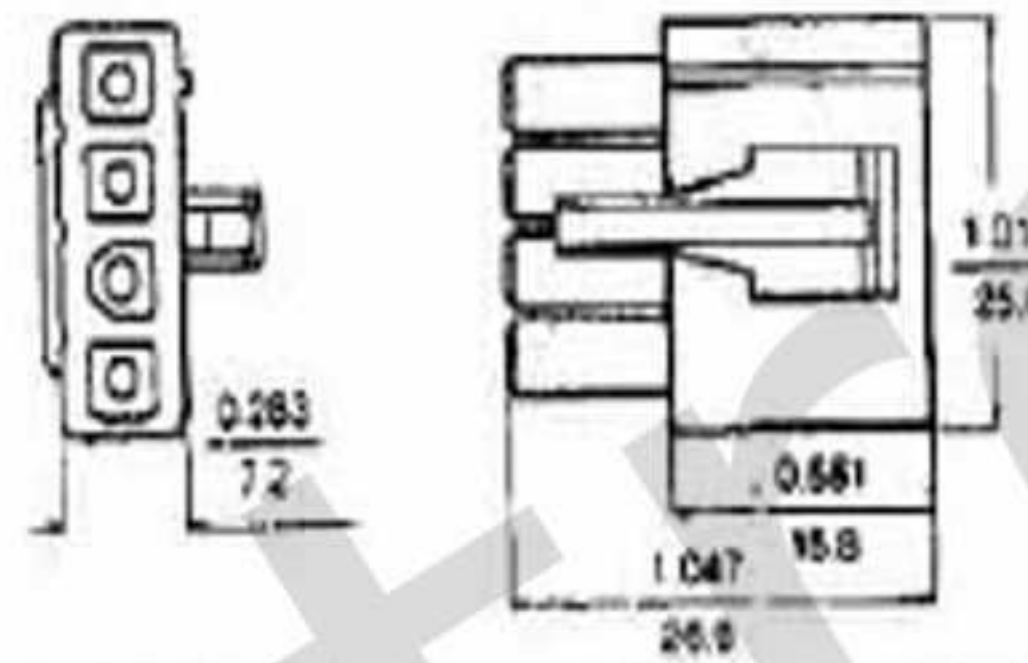
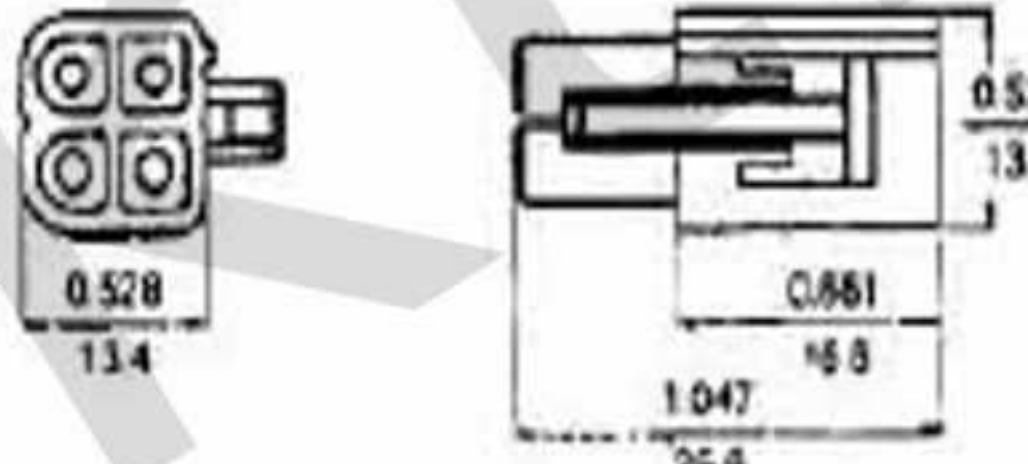
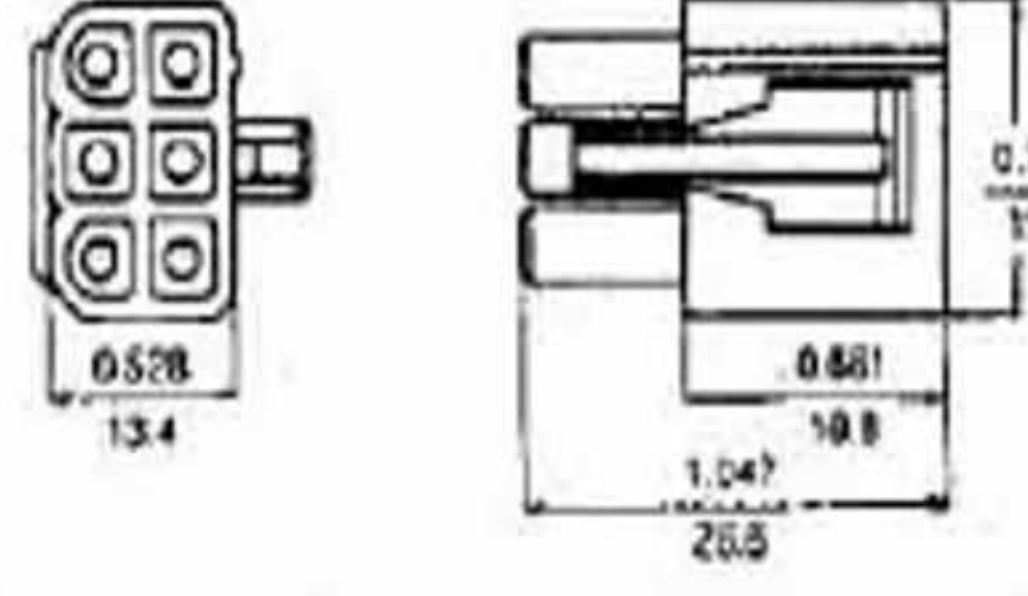
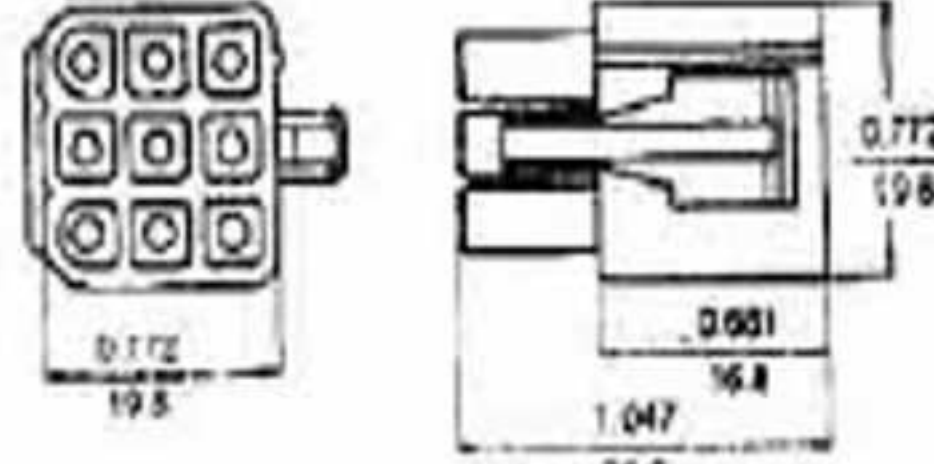
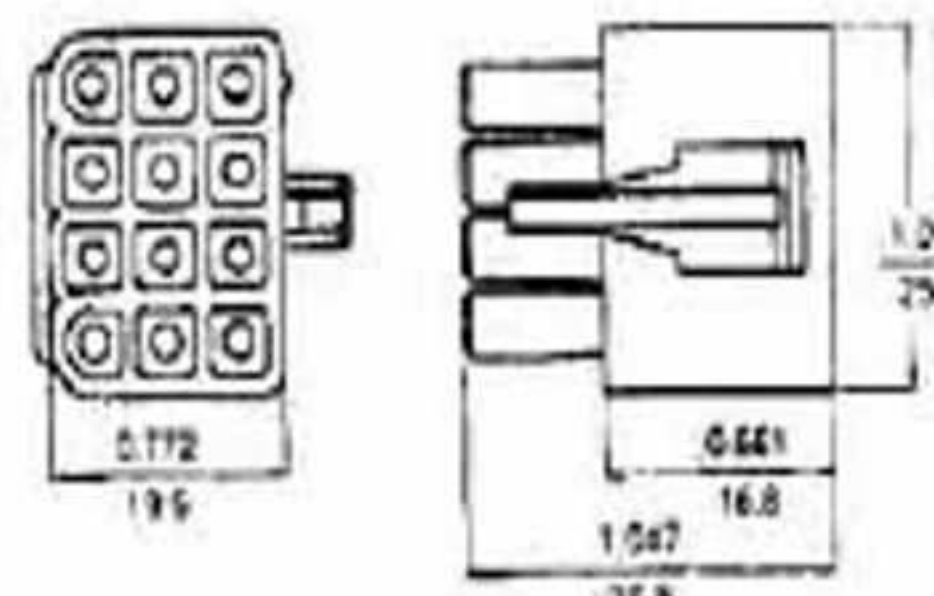
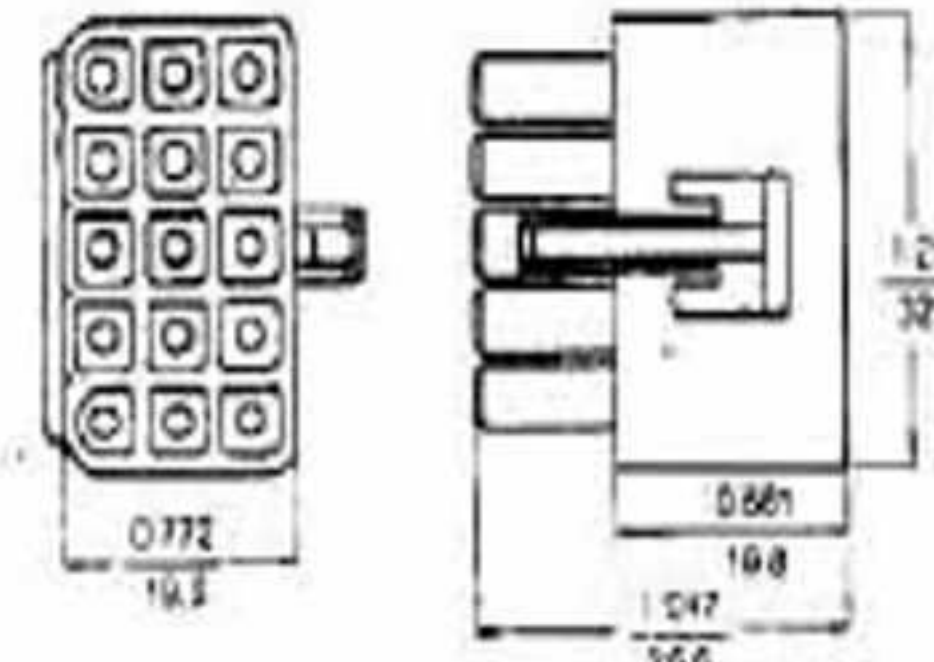


SPECIFICATION

- ◆ Current rating: 15A AC, DC max.
- ◆ Voltage rating: 300V AC, DC
- ◆ Temperature range: -25 °C ~ +90 °C
(including temperature rise)
- ◆ Contact resistance: Initial value/7m Ω max.
After environmental testing/10m Ω max.
- ◆ Integrally molded polarization
- ◆ Nylon 66, 94V-2
- ◆ Standard color: white
- ◆ Insulation resistance: 1,000M Ω min.
- ◆ Withstand voltage: 1500V AC/minute
- ◆ Applicable wire: AWG#24~14
0.2~2.0mm
- ◆ Applicable panel thickness: 0.031" ~ 0.79"
(0.8~2.0mm)
- ◆ 1,2,3,4,6,9,12,15 circuit versions
- ◆ Positive locking

CIRCUIT	RECEPTACLE
1	
2	
3	

CIRCUIT	RECEPTACLE
4	
4	
6	

CIRCUIT	RECEPTACLE
9	
12	
15	

Oznaczenie	JS-6219-XX	
Opis	CRIMP TERMINAL HOUSINGS 7.0mm pin < 2.0mm	
	WW elektronik s.c. ul. Kraszewskiego 26 81-815 Sopot	Tel. 058 551-11-15 fax. 058 550-45-17 e-mail: info@wwelektronik.com.pl
	www.wwelektronik.com.pl	