



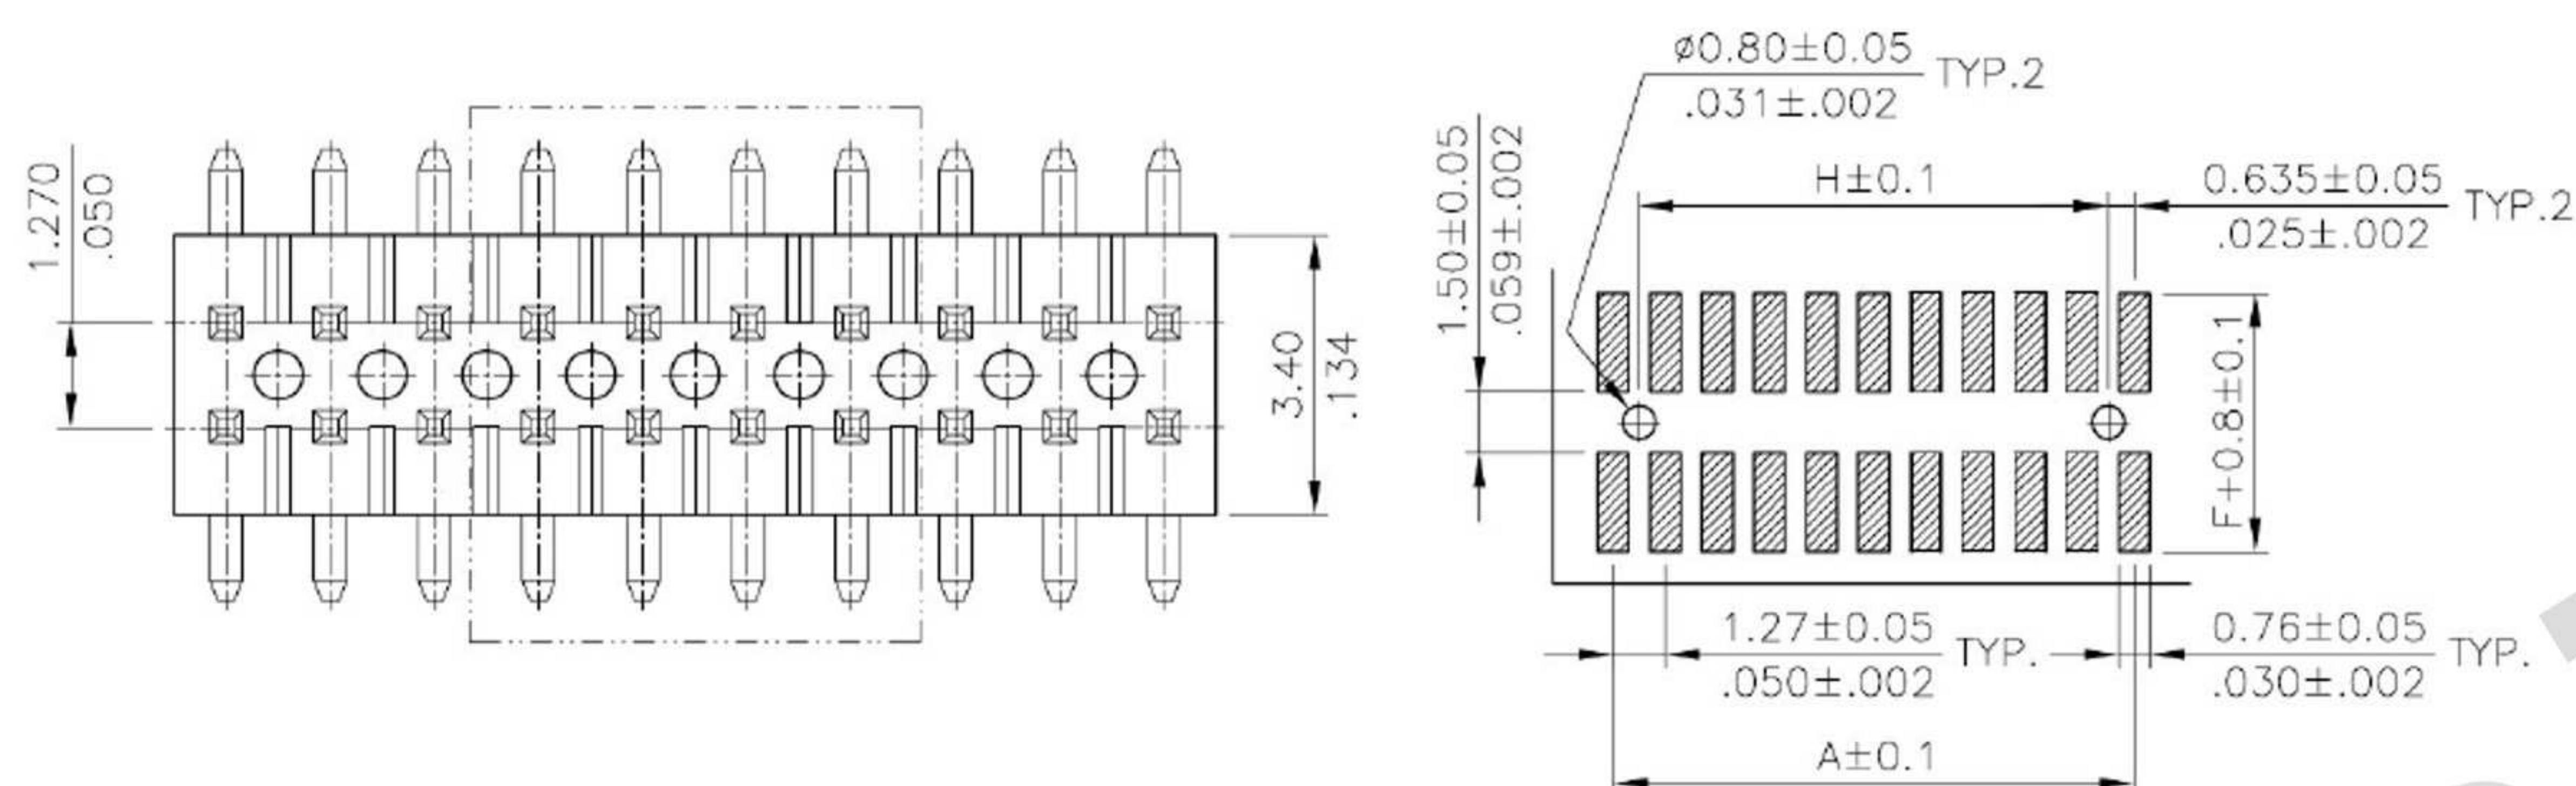

Material:

- * Insulator: LCP With 30% GF.
UL 94V-0 Color Black
- * Square Pin: Brass
- * Pegs: Brass, Tin plated
- * Pick & Place Pad:
Nylon 6T
UL 94V-0 Color Nature

Recommended P.C. Board Layout

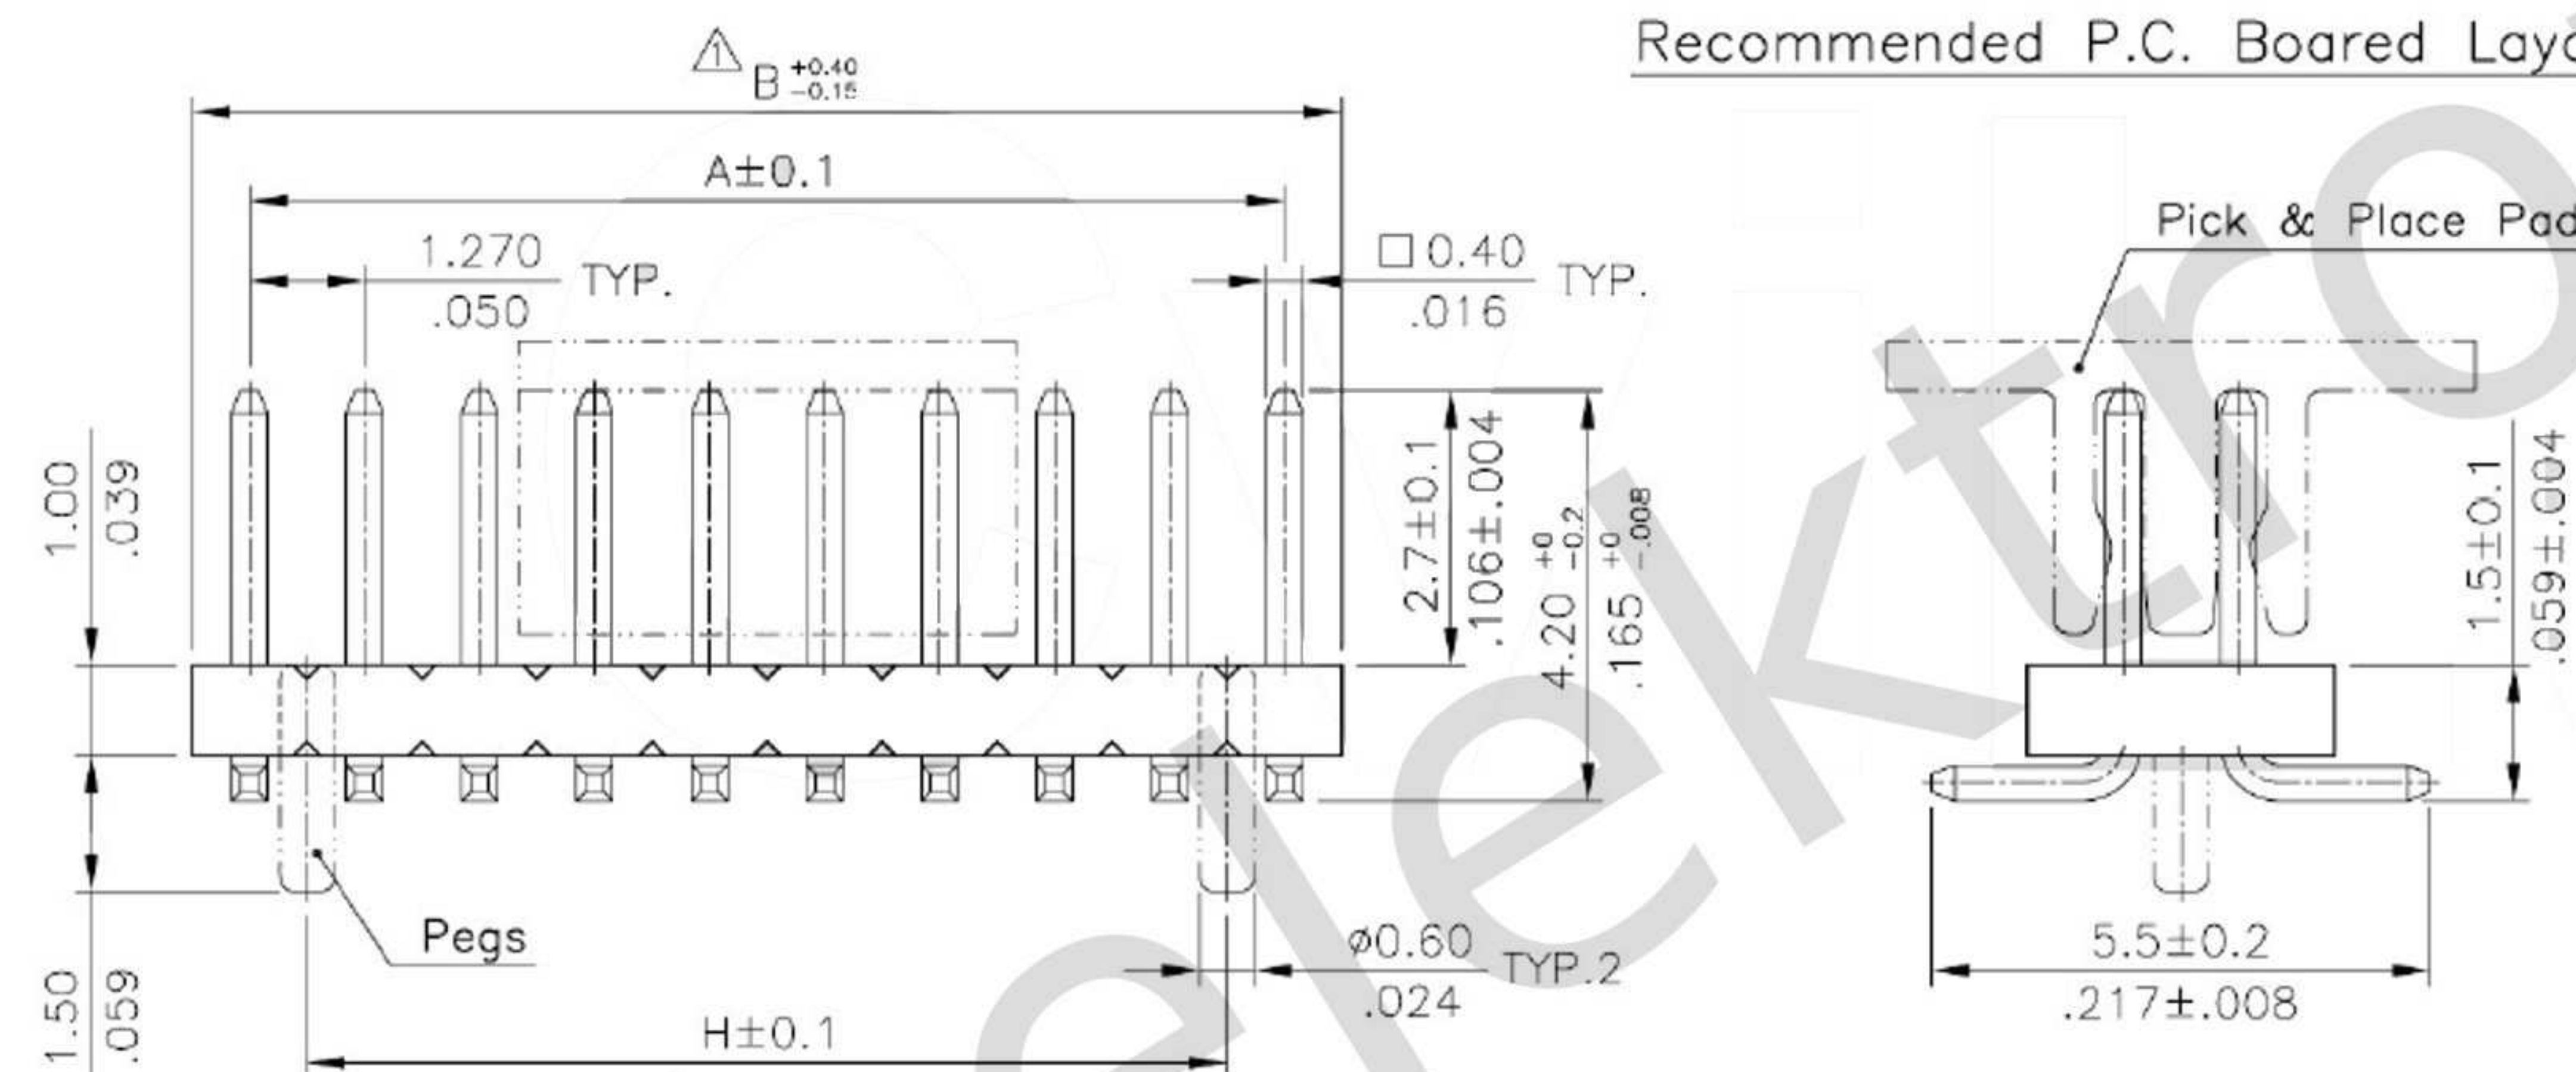

Plating code:

2=Gold Flash plated over
1.27µm(50u") Nickel

Tail & Mounting Style:

M=Straight SMT Type

Insulator Material & Color:

1=LCP, Color Black

P=With Peg

P=With Pick & Place Pad
(Tape & Reel packing)

- DIM. A = 1.27 X No. of Spaces
DIM. B = DIM. A + 1.27
DIM. H = DIM. A - 1.27
* Available in 6 through 100 Circuits

Oznaczenie	PH-DR-SMT-20 1,27	
Opis	1.27mm Dual Row Pin Header SMT	
	WWElektronik ul. Kraszewskiego 26 81-815 Sopot	Tel. 058 551-11-15 fax. 058 550-45-17 e-mail: info@wwelektronik.com.pl
	www.wwelektronik.com.pl	