



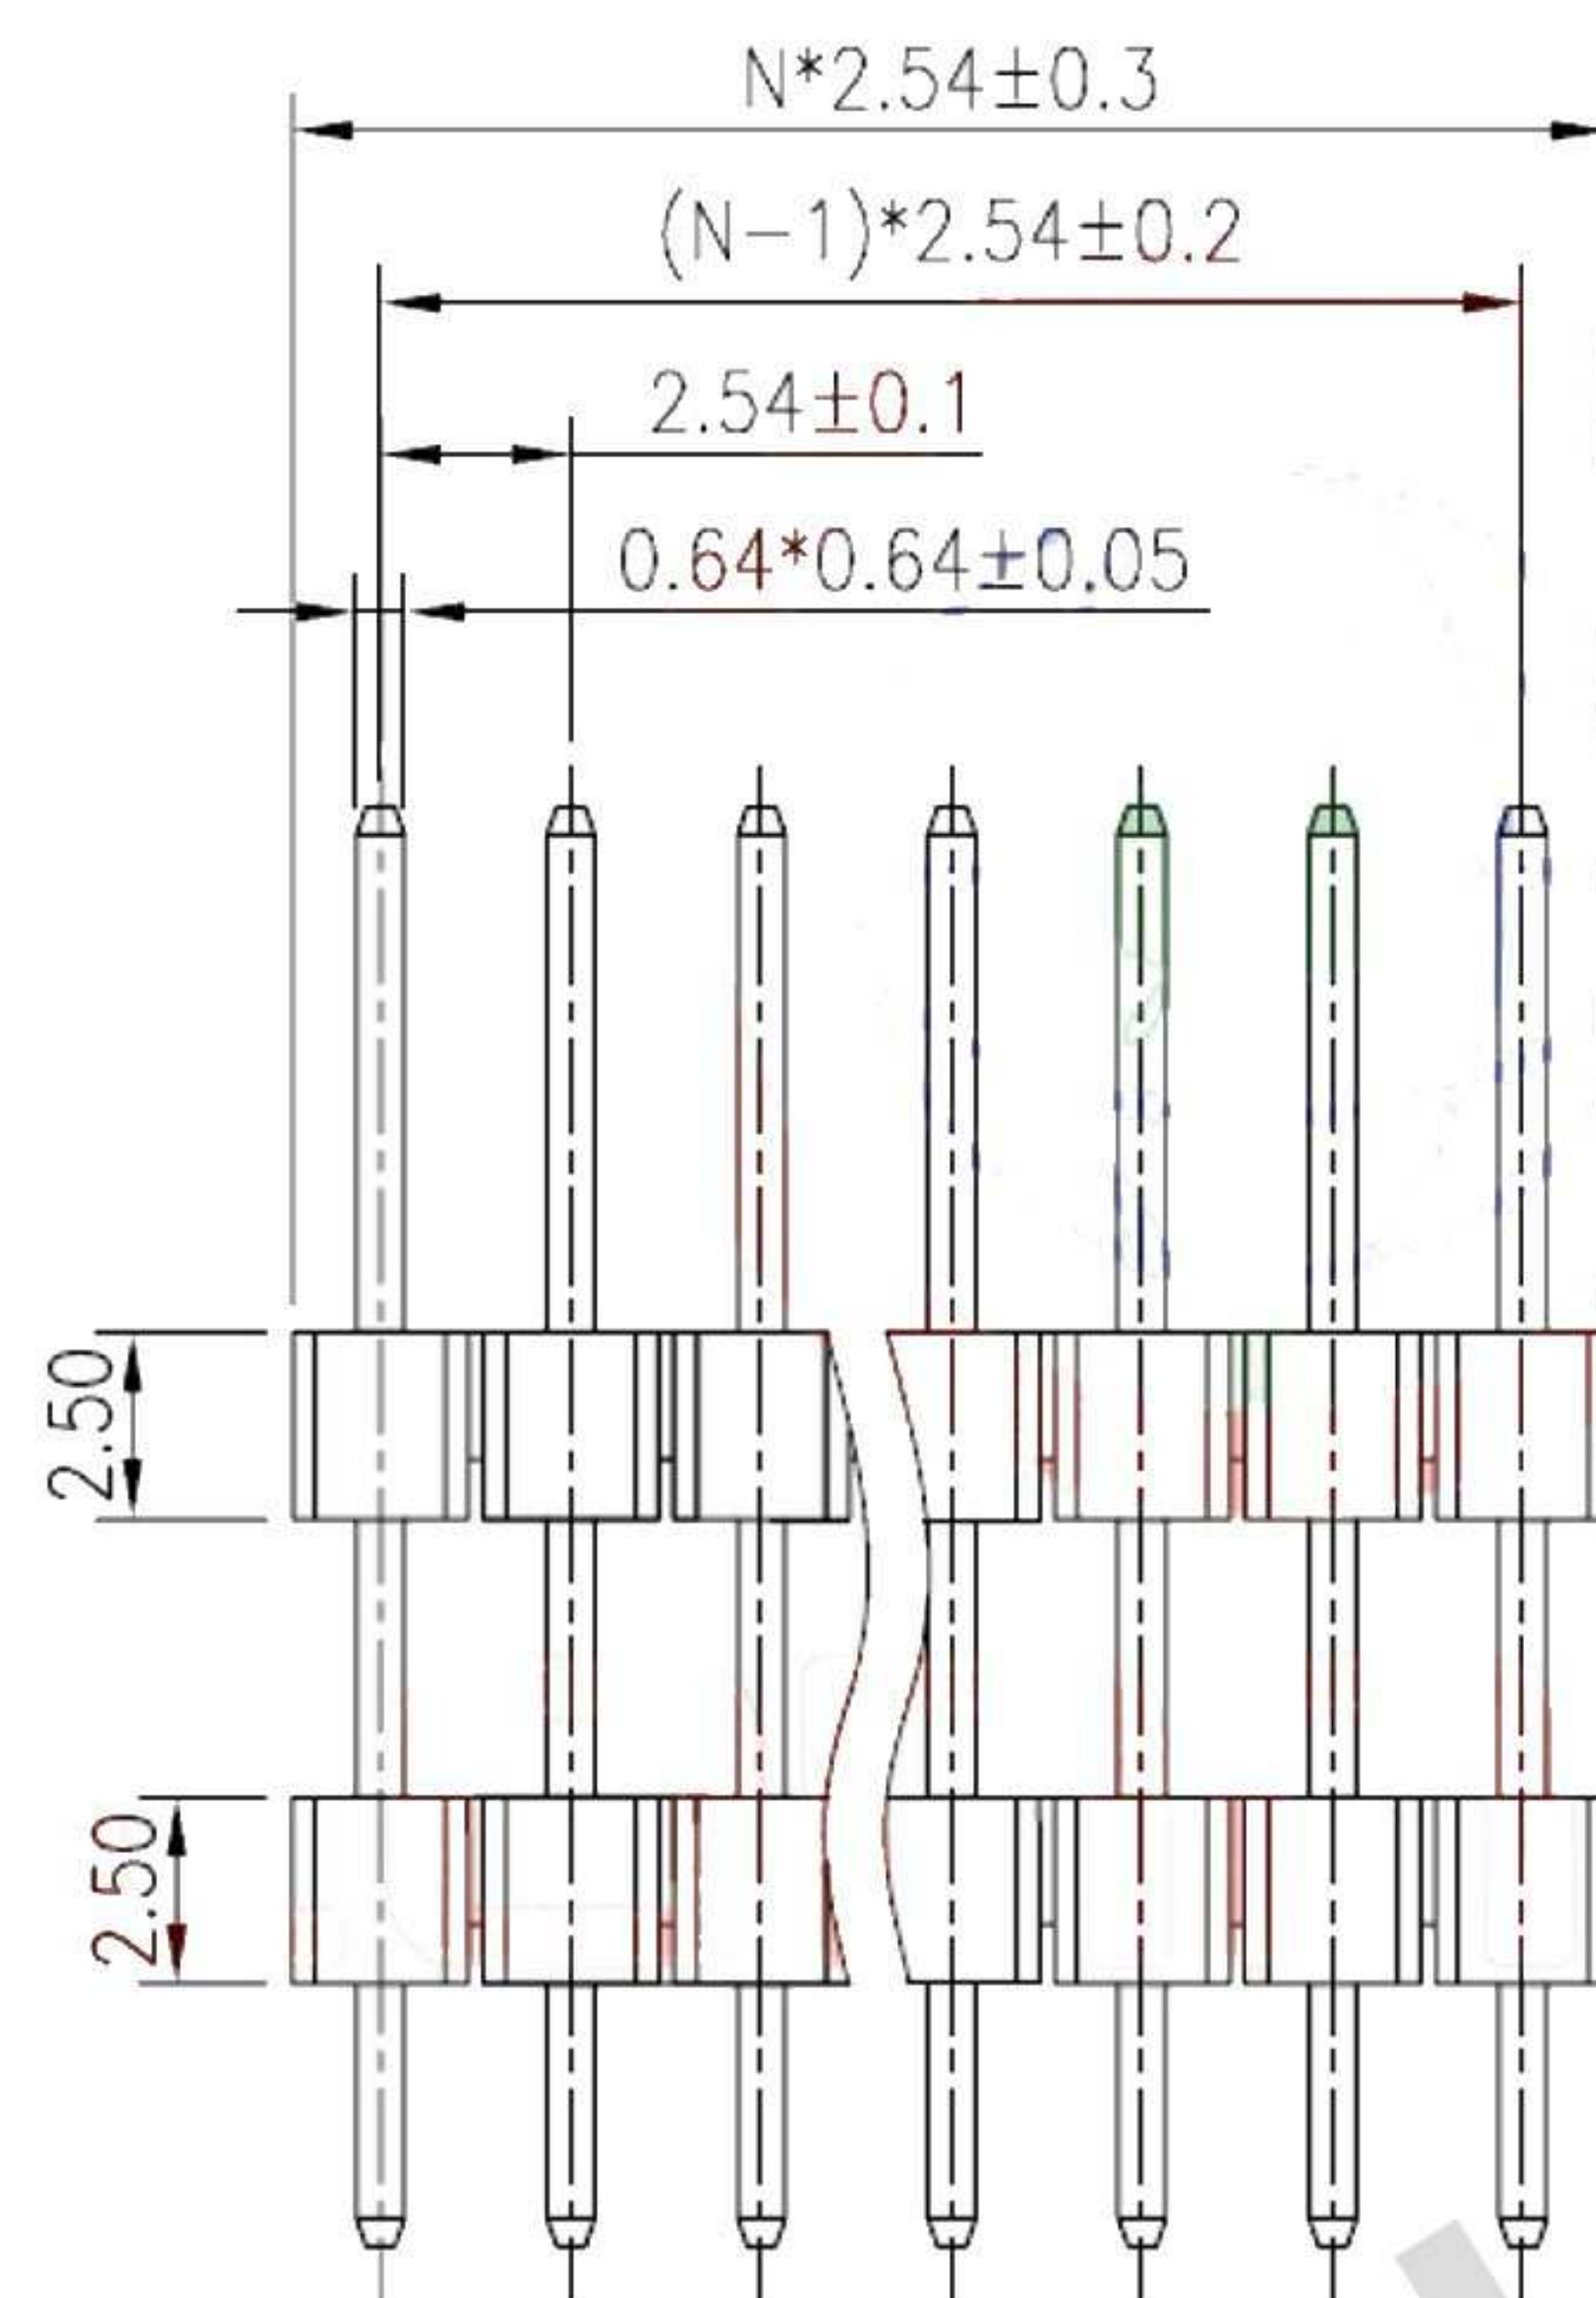


N:NUMBER OF CONTACTS

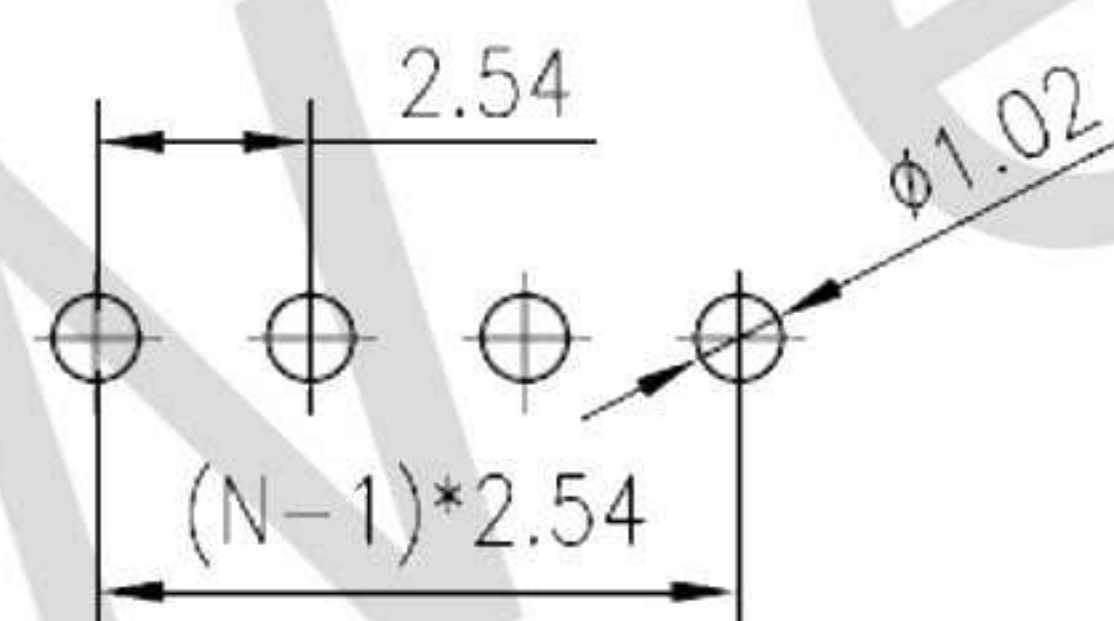

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

V1 TYPE

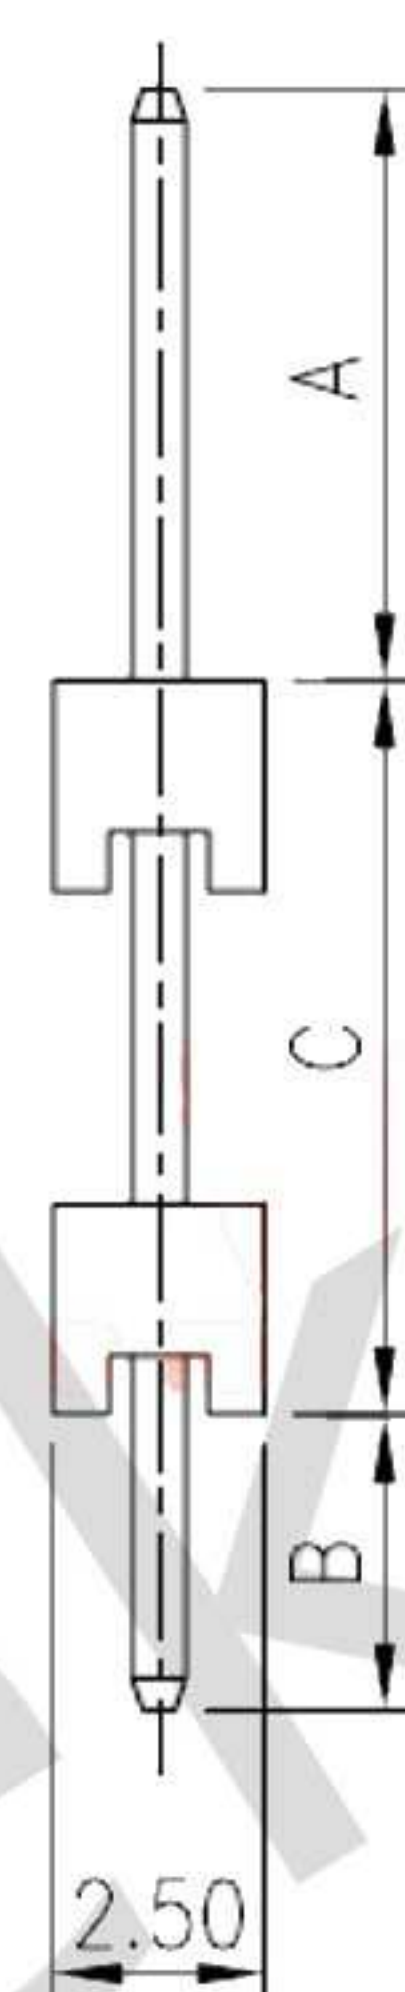

NOTES:

1. MATERIAL

- 1.1 INSULATOR:THERMOPLASTIC(UL94 V-0).
- 1.2 CONTACT MATERIAL:COPPER ALLOY.

2. SPECIFICATION

- 2.1 CURRENT RATING:1.5 Amp.
- 2.2 INSULATION RESISTANCE:1000MΩ Min.
- 2.3 DIELECTRIC WITHSTANDING:600VAC.
- 2.4 CONTACT RESISTANCE:50mΩ Max.
- 2.5 OPERATING TEMPERATURE:-40°C TO+105°C.

MOUNTING TYPE
V:VERTICAL TYPE
HOUSING COLOR
B:BLACK

CONNECT TYPE
P:PLUG
No.OF CONTACTS
1*1-1*40

Oznaczenie	PH-SR-ST-xx-G-1	
Opis	2,54mm Pin header, double insulator/spacer, straight	
	WW elektronik ul. Kraszewskiego 26 81-815 Sopot	Tel. 058 551-11-15 fax. 058 550-45-17 e-mail: info@wwelektronik.com.pl
	www.wwelektronik.com.pl	